


AX-243 B

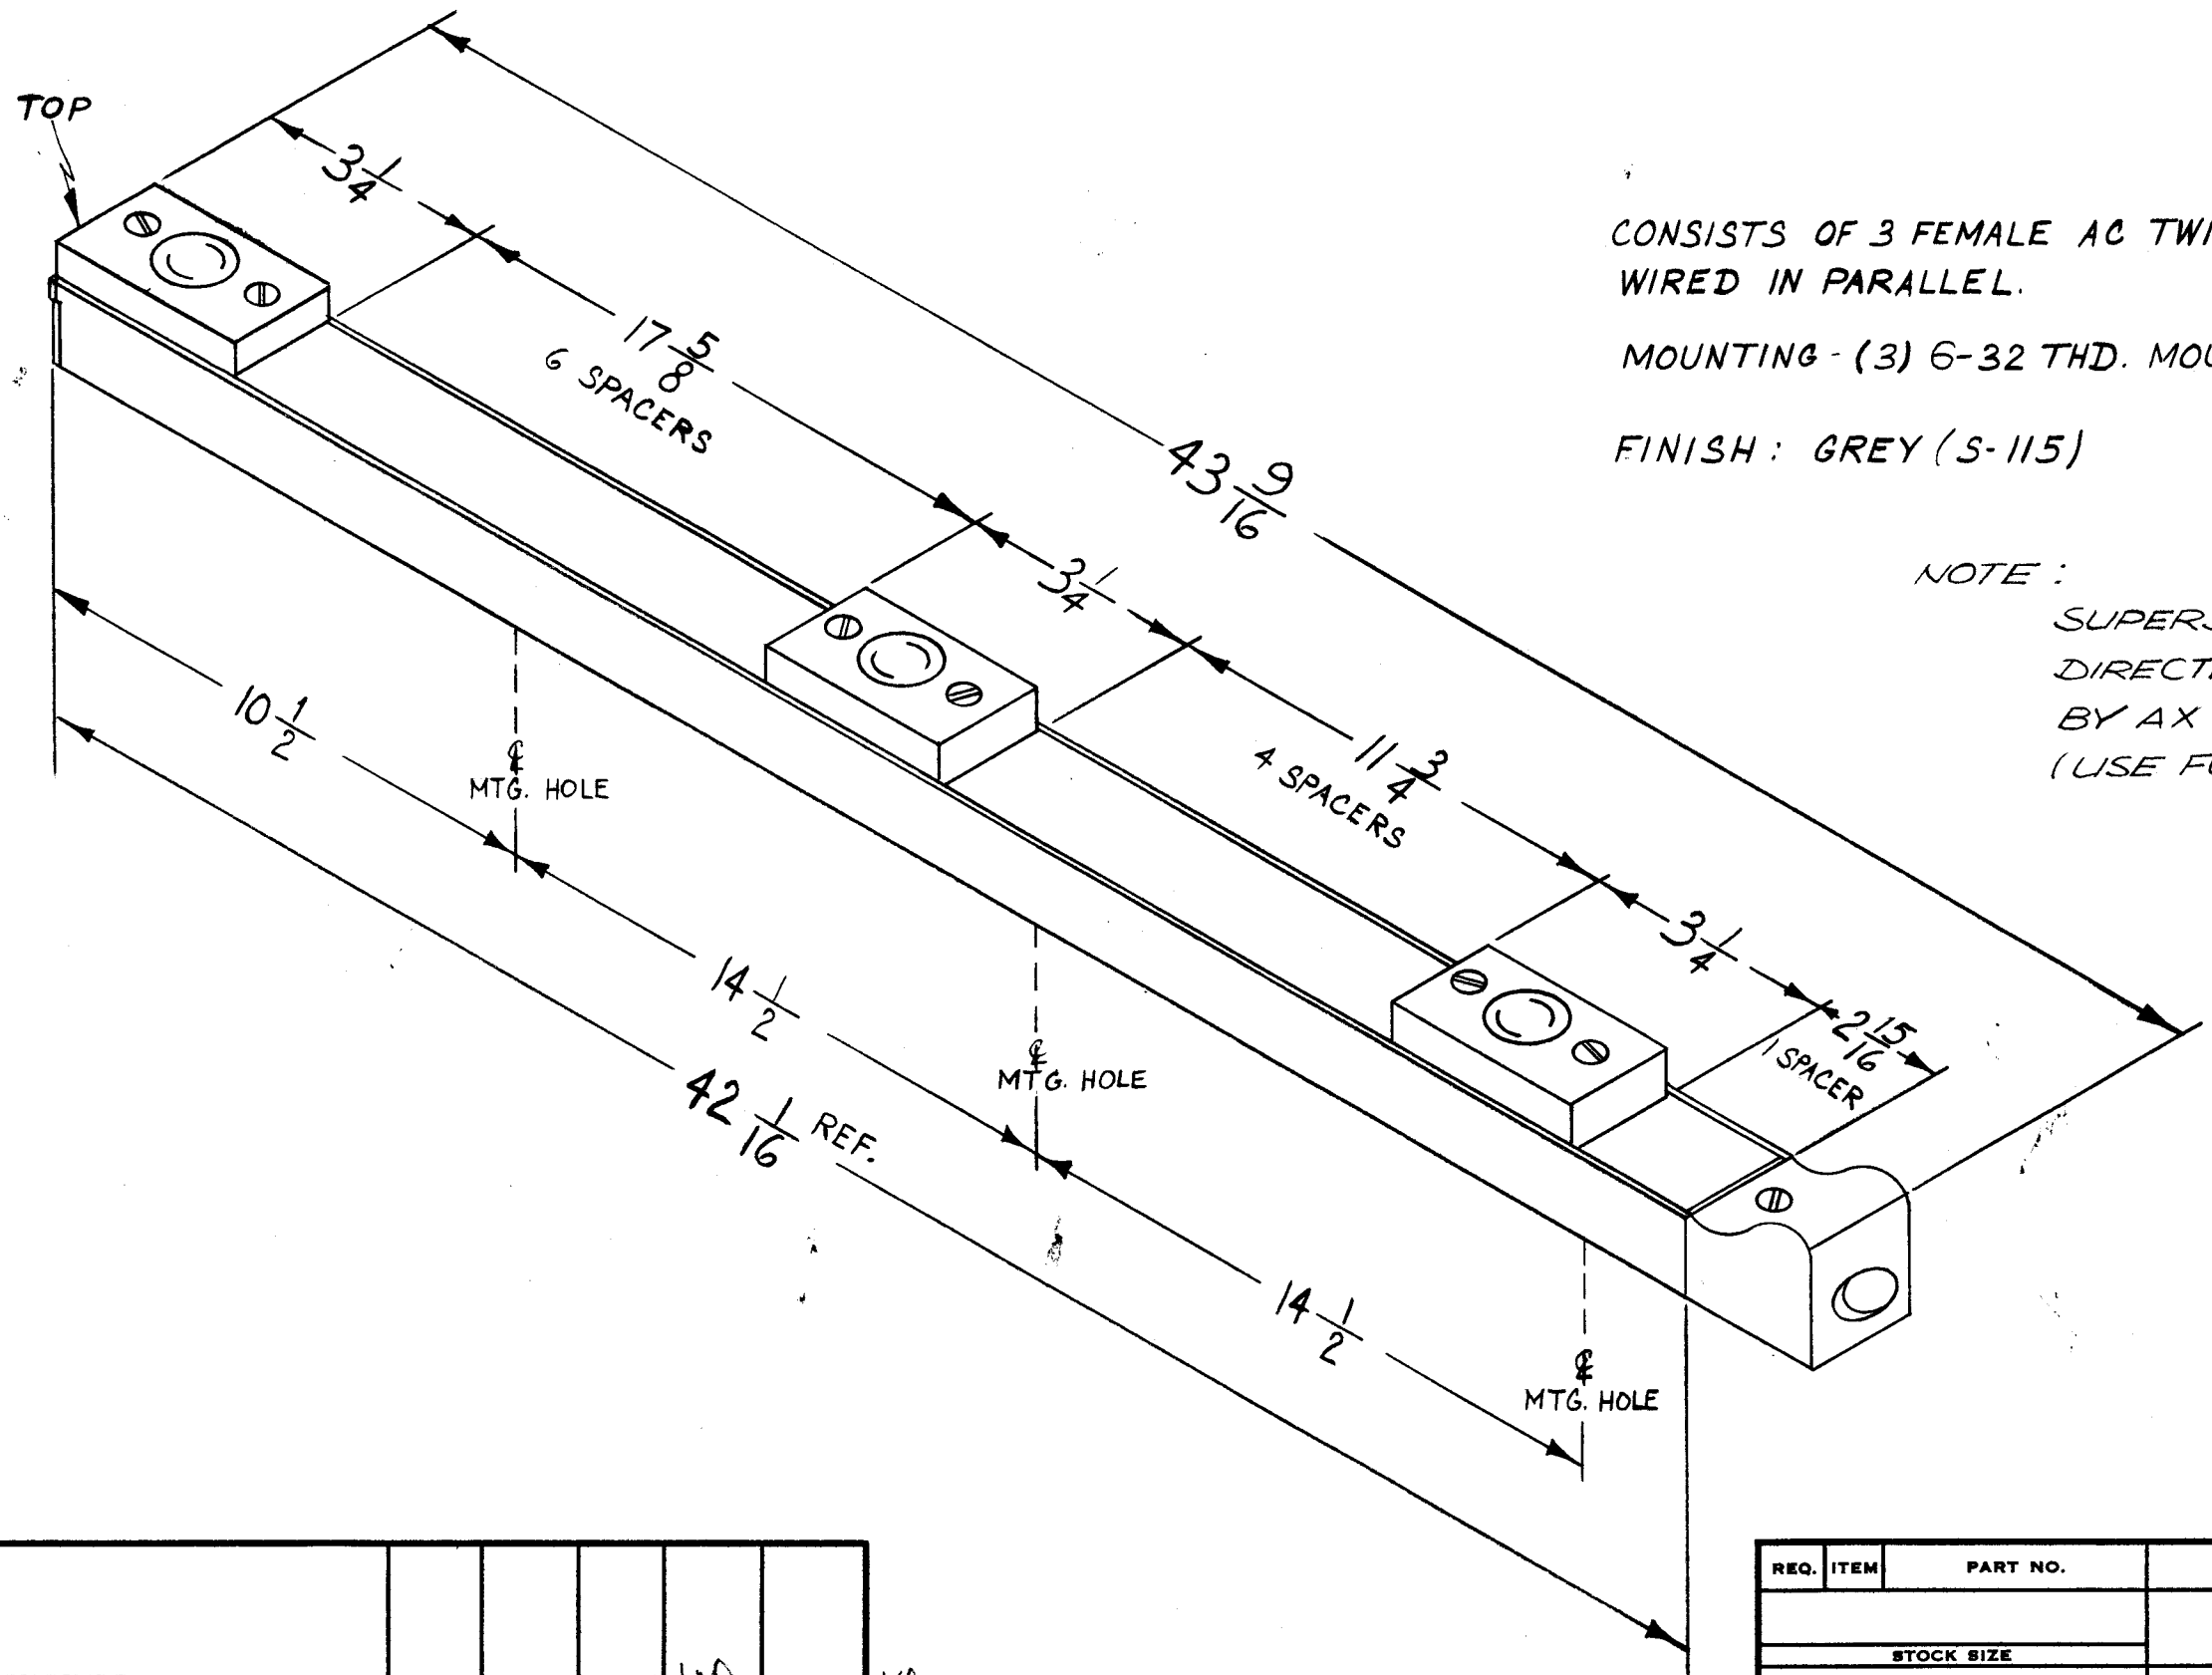

CONSISTS OF 3 FEMALE AC TWISTLOCK RECEPTACLES WIRED IN PARALLEL.  
 MOUNTING - (3) 6-32 THD. MOUNTING HOLES.  
 FINISH: GREY (S-115)

NOTE:  
 SUPERSEDED  
 DIRECTLY REPLACED  
 BY AX 672  
 (USE FOR SPARE PARTS ONLY)

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
B	ADDED NOTE	10/11/68	19075	L.H.H.	J.H.D.	RT
A	6-32 Mounting Holes Were 8-32 Holes.	1/24/61	3971	D.J.M.	J.C.B.	PK

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

SCALE: 1A-2037

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
1	RAK-10			12-28-60

USED ON

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		AC POWER STRIP	
		MATERIAL	
		TYPE & TEMPER	
		HEAT TREAT. SPEC.	
		DRAWN	
		CHECKER	
		FINAL APPROVAL	
		FINISH & SPEC. NO.	
		ELEC. DES. APP.	
		MECH. DES. APP.	