


AX-247  
A

CONSIST OF: (5) AC TWISTLOCK RECEPTACLES,  
 WIRED IN PARALLEL,  
 (1) END FITTING CABLE ENTRY  
 (1) END FITTING BLANK  
 (1) CABLE, CLAMP  
 FINISH: GREY (S115).

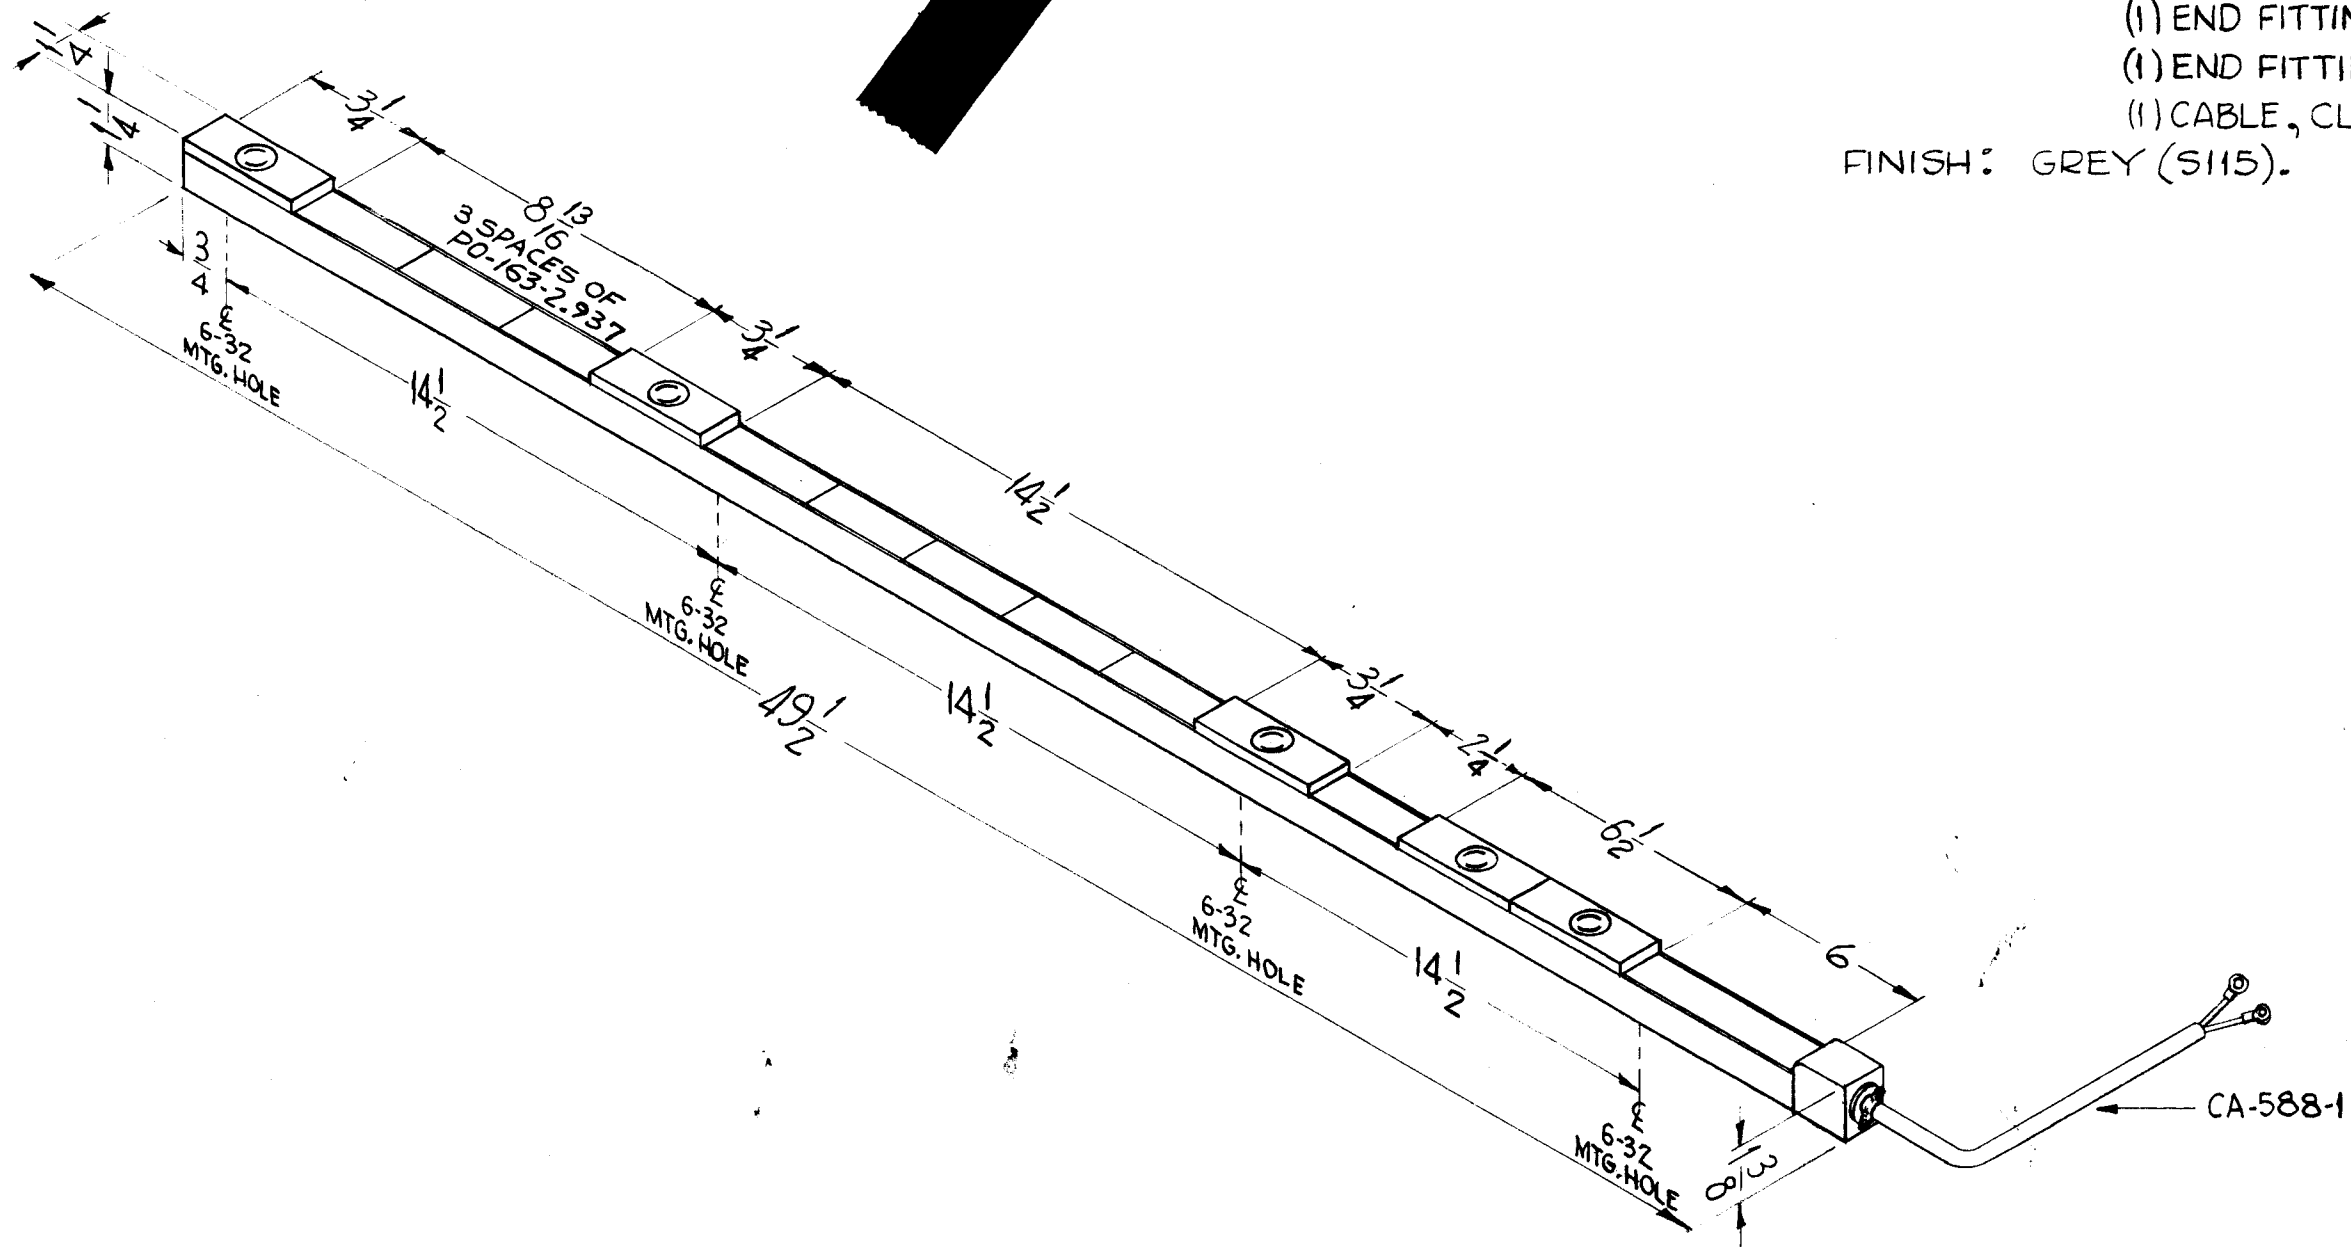

A	DIM 6 WAS 5"; 2 1/4 WAS 2 5/8; 14 1/2 WAS 14 11/16	1-	14-	7979			
	PO-163-2.937 WAS PO-163-3 ON DIM 14 1/2, PO-163-3 DELETED	63					
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°		SCALE: 2A-2051		MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES			

1	RAK-19			2-17-61
REQ. PER UNIT	MODEL	SECTION	ASS'Y. NO.	DATE
USED ON				

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		AC POWER STRIP	
		D. J. [Signature]	Rou [Signature]
		TYPE & TEMPER	HEAT TREAT. SPEC.
		DRAWN	CHECKER
			FINAL APPROVAL
		FINISH & SPEC. NO.	ELEC. DES. APP. MECH. DES. APP.
			AX-247
			A