


AX655


USED ON
ASSY. NO. 11-22-66
DATE

MODEL
DDR 7JI

REQ. PER UNIT
1

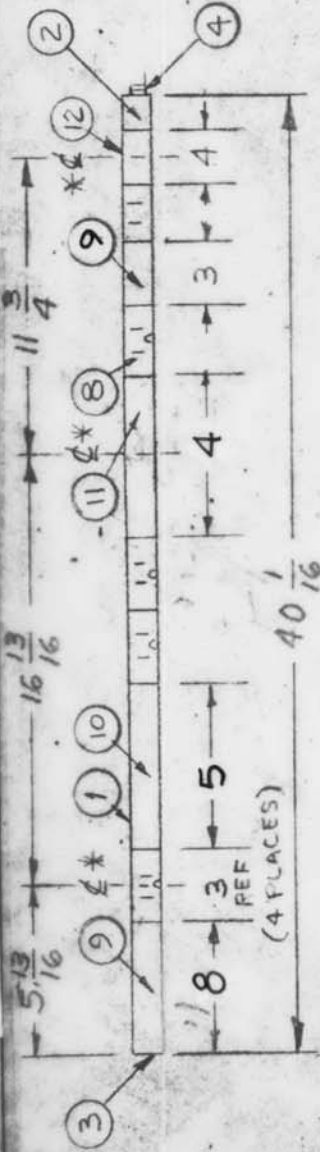

* Φ MTG HOLE.

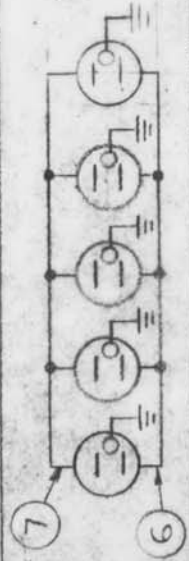

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
2 11	PO163-4.000	COVER, CONNECTOR, STRIP	□
1 10	PO163-5.000	Cover, Connector, Strip	□
2 9	PO163-8.000	Receptacle, Grounding	□
5 8	JJ294-1	Wire, Elect, Ins.	—
X 7	MWC12(19)UO	Wire, Elect, Ins.	—
X 6	MWC12(19)U9O	Terminal Lug	—
16 5	TE155-34168	Connector, Armored Cable	—
1 4	CUL13	Fitting, End, Blank	—
1 3	PO161	Fitting, End, Cable Entry	—
1 2	PO-162	Channel, Strip, AC	—
1 1	MS-4144		

SYM	DESCRIPTION	STOCK SIZE	MATERIAL	TYPE & TEMPER	HEAT TREAT. SPEC.	FINISH & SPEC. NO.
Ø	ORIGINAL RELEASE FOR PRODUCTION		CU			
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES					
	TOLERANCES					
	DECIMALS					
	.X ± .05					
	.XX ± .01					
	.XXX ± .005					
	FRACTIONS ± 1/64					
	ANGLES ± 0° 30'					
	DATE 9/9/66					
	CHECKER					
	DRAFTS					
	ENG. APPR.					
	WTV					
	10/20/66					
	DRAWN					
	CHECKED					
	FINAL APPROVAL					
	AC POWER					
	STRIP ASSEMBLY (4 Conn.)					
	MAMARONECK, NEW YORK					
	THE TECHNICAL MATERIEL CORP.					
	Channel, Strip, AC					
	Fitting, End, Cable Entry					
	Fitting, End, Blank					
	Connector, Armored Cable					
	Terminal Lug					
	Wire, Elect, Ins.					
	Wire, Elect, Ins.					
	Receptacle, Grounding					
	Cover, Connector, Strip					
	Cover, Connector, Strip					
	COVER, CONNECTOR, STRIP					

AX655