



STANDARD DRAWING

REVISIONS						
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD
	Ø	ORIGINAL RELEASE FOR PRODUCTION	5.18.64		LSB	
A3	A	ASSY. NO. WAS A-3184 (2 PLACES)	7.7.64	11700	LSB	
	B	ON S401: BC2918B-15 WAS BC2918B-6	3.23.65	13649	JSF	
	C	DATA CHART & CURVE GRAPH ADDED	11.18.66	17272	WV	
	D	REV. # UPDATED SPECS	7.26.67	18406	NEL	

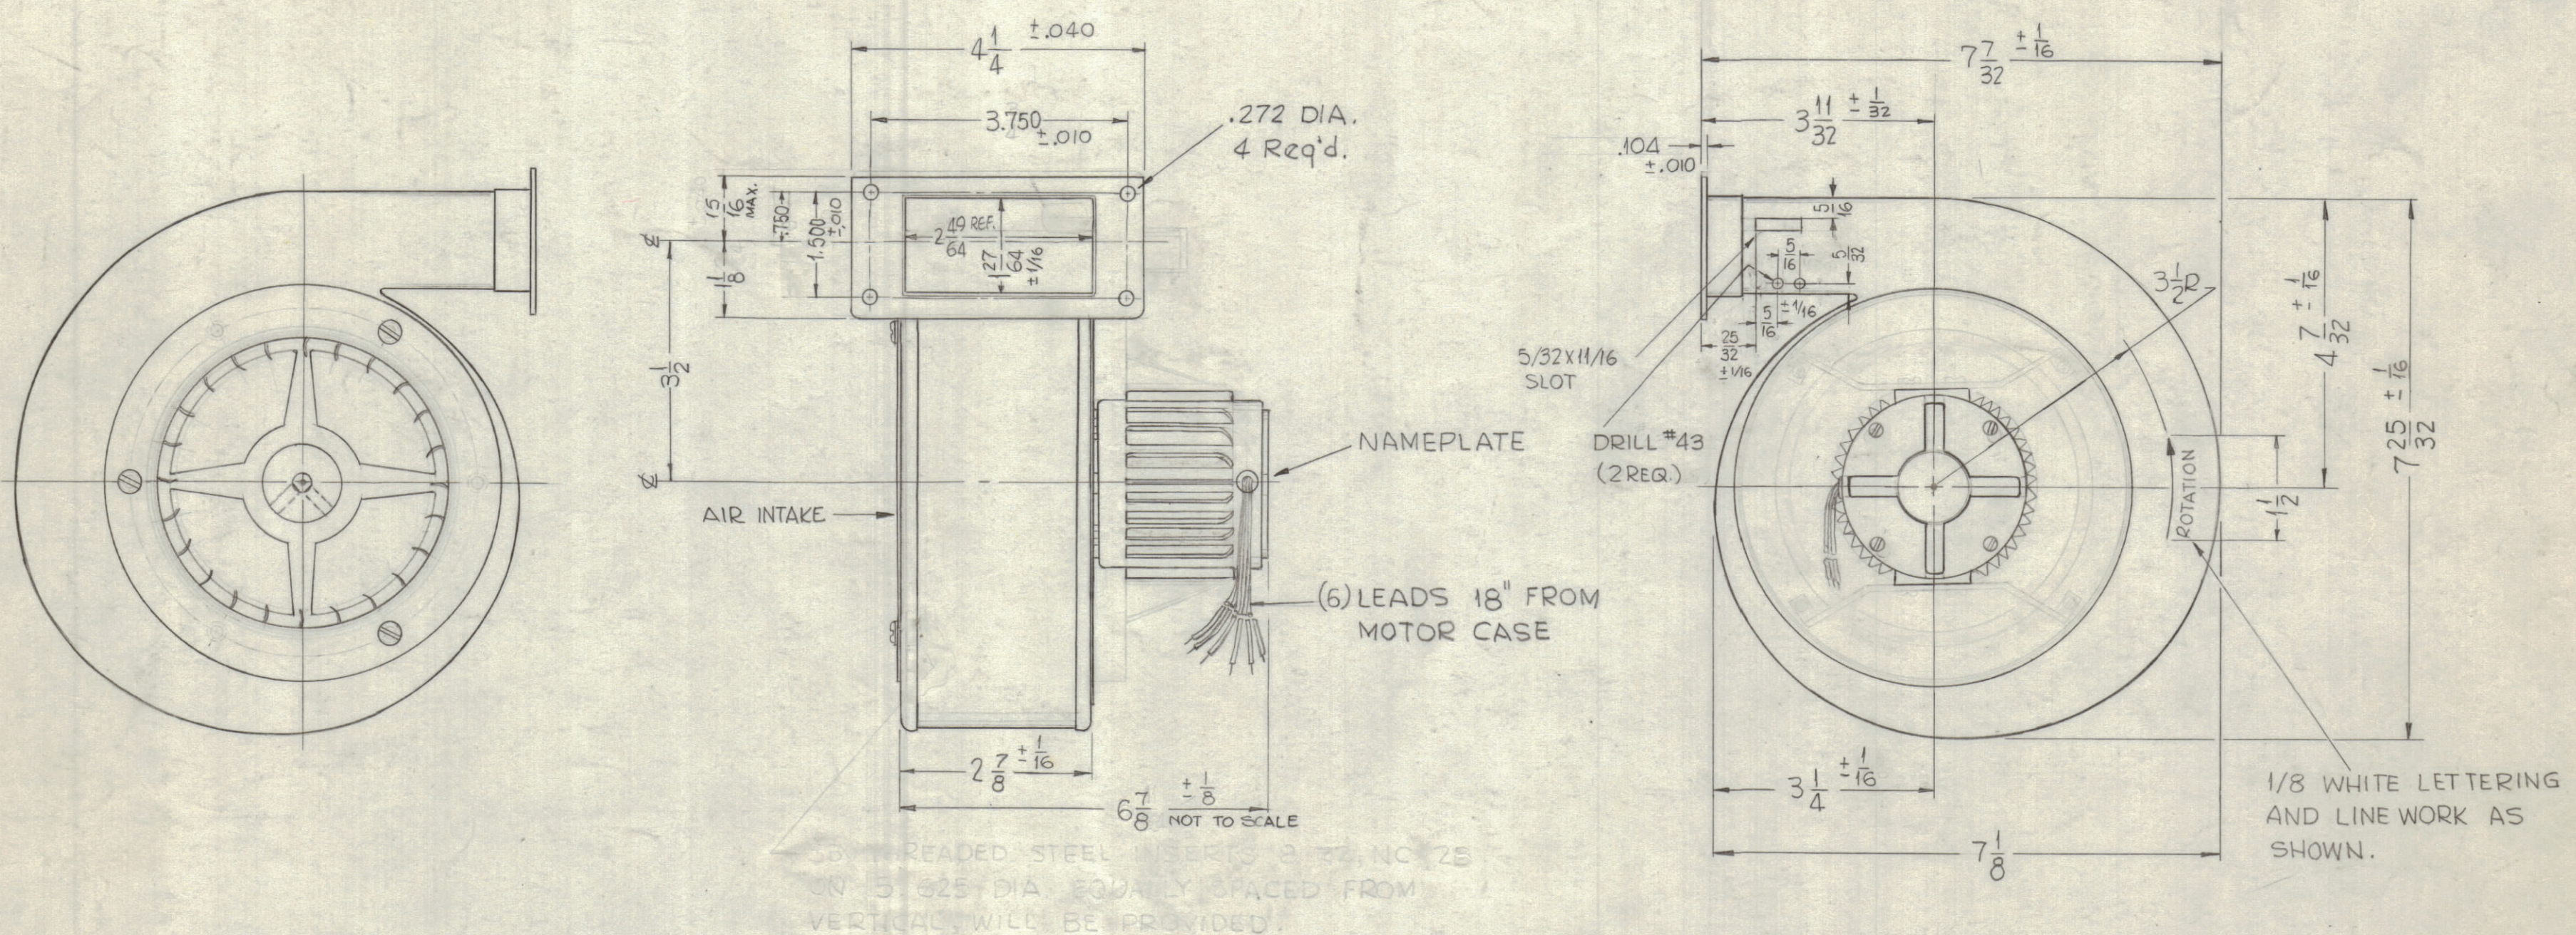


35 HARDENED STEEL INSERTS 2 3/4" NO. 25 ON 15.625" DIA. EQUALLY SPACED FROM VERTICAL, WILL BE PROVIDED.

V	Hz	RPM	CURRENT	WATTAGE
115	60	3200	1.1 AMP	126 WATTS
115	50	2850	1.0 AMP	115 WATTS

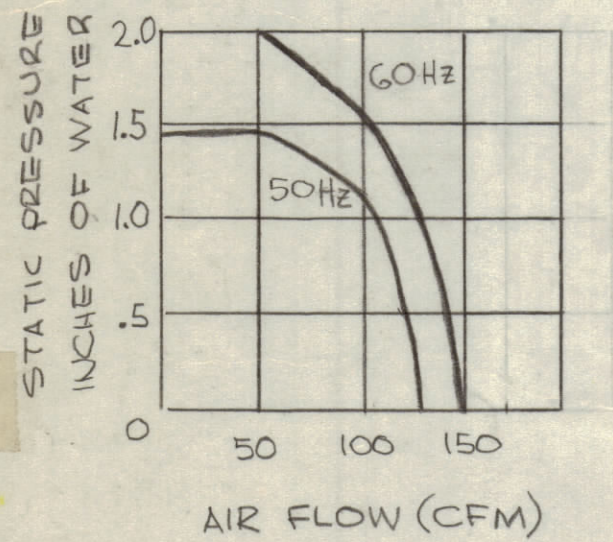

MAX. CFM - 155
 VOLTAGE ~ 115/230V, 50/60 HZS SINGLE PHASE
 CAPACITANCE ~ 4 MFD
 NOMINAL RPM ~ 3200
 INSULATION ~ 125°C (CLASS B)
 FULL LOAD WATTS ~ 110
 LINE AMP ~ 1.1/0.55A. AT 60 CPS
 LOCKED MOTOR AMP ~ 2A.
 MAX. STATIC PRESSURE AT NO DELIVERY ~ 2.1
 TOTAL NET LBS. ~ 7.8
 ROTATION ~ CCW AS VIEWED FROM MOTOR END

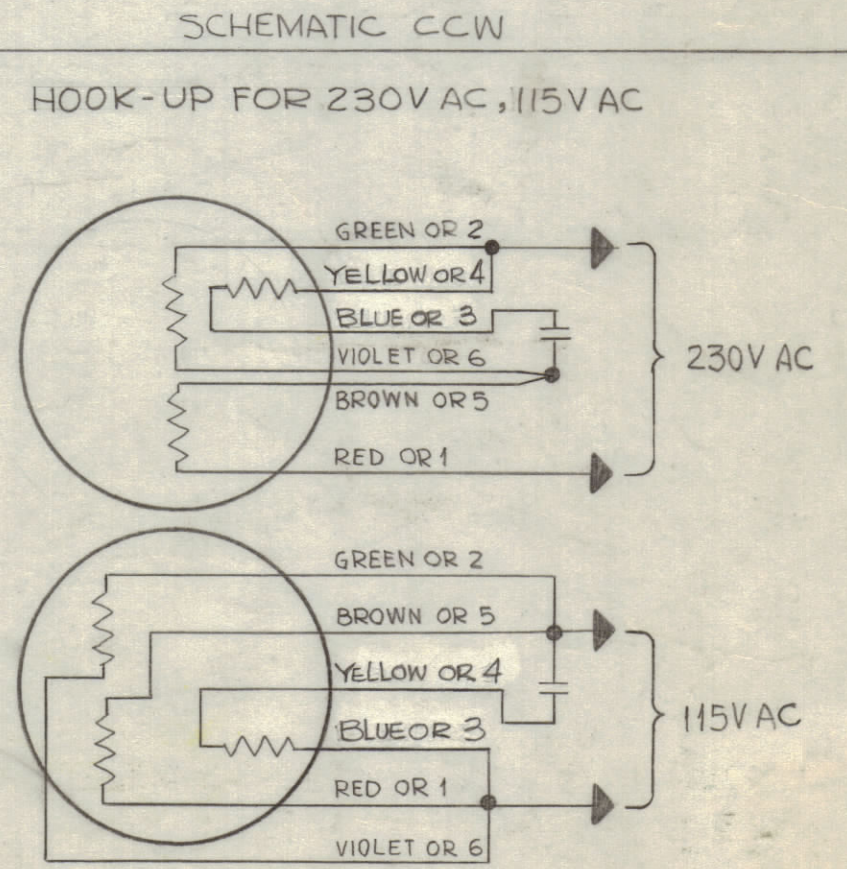

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F. BUDETTI LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE FAN, CENTRIFUGAL	
Q'TY./UNIT		MODEL USED ON	ASS'Y. NO.	
SCALE		CODE	3401-116-1 (BC2918B-15)	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN SRG	DATE 11-29-62
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			CHECKED aa	DATE
FRACTIONS ± 1/64 ANGLES ± 0° 30'			ELECT. DES. 228	DATE 8/1/68
TOLERANCES			MECH. DES. NEL	DATE 7/26/67
			FINAL APPROVAL	DATE
			BL-115	
			SHEET	REV. LTR.

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

BL 115 D