


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

**NOTICE TO PERSONS RECEIVING THIS DRAWING**

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:  
**THE TECHNICAL MATERIEL CORPORATION**  
MAMARONECK, NEW YORK

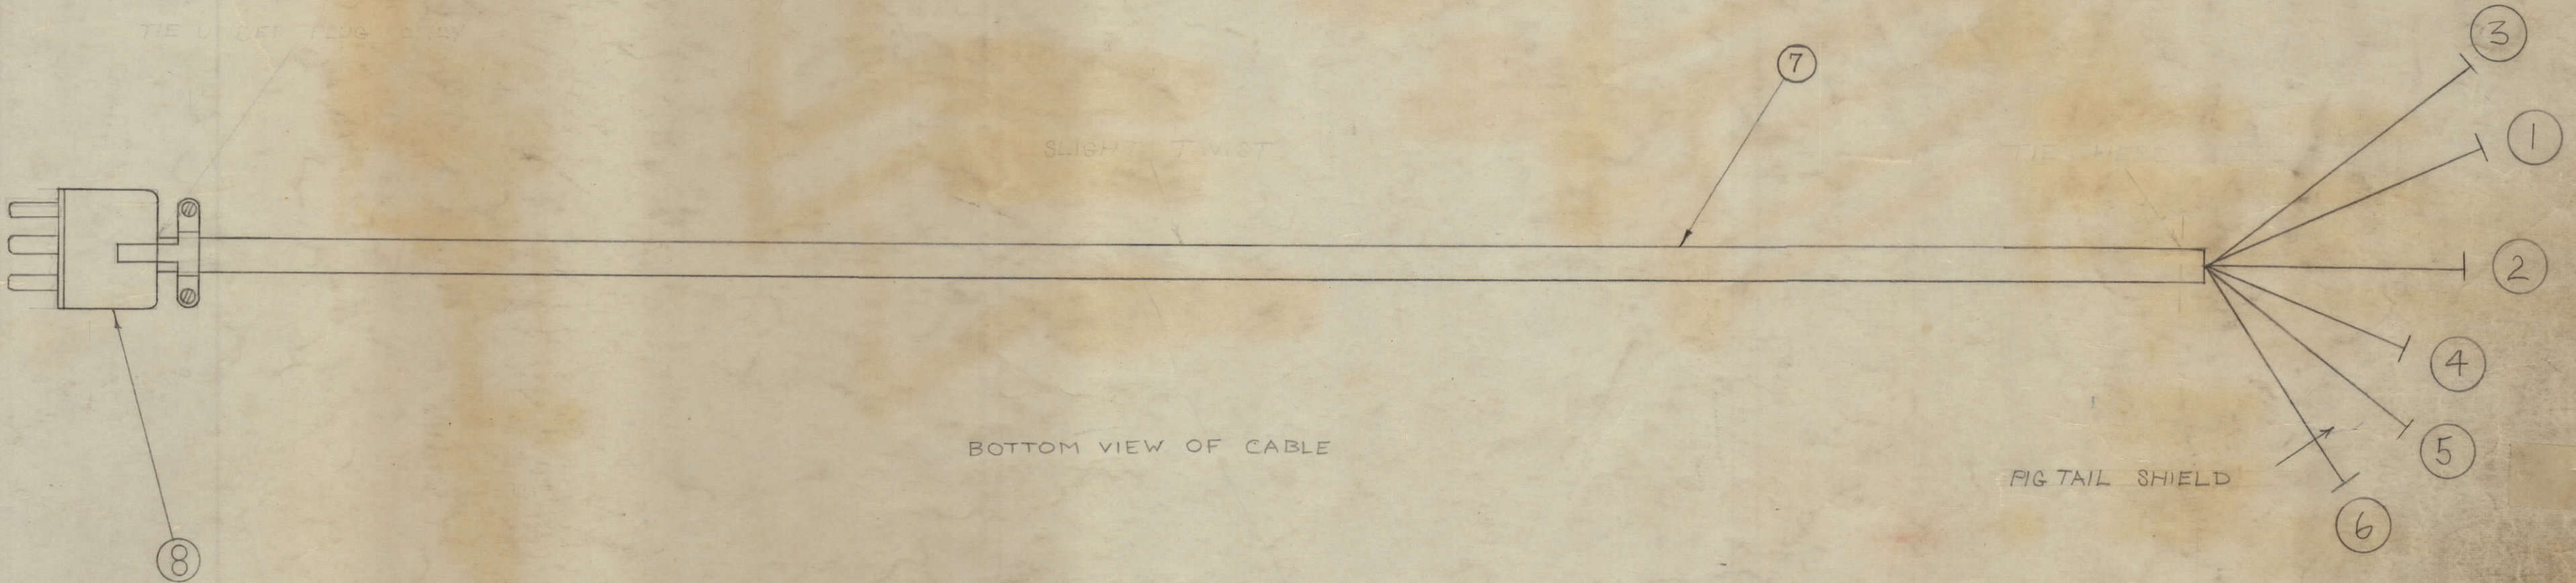

ITEM	COLOR	SIZE	LENGTH	FROM	TO
1	WH. RED	22	19 1/2	P301 PIN 1	STAND-OFF
2	BROWN	20	19 1/4	P301 PIN 2	V302 PIN 5
3	RED	22	19 1/2	P301 PIN 3	STAND-OFF
4	WH. BLUE	22	18 3/4	P301 PIN 4	STAND-OFF
5	BLACK	22	19 3/4	P301 PIN 5	GROUND
6	SHIELD	2.2	20	P301 PIN 6	STAND-OFF

CA-120 C

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
C	1	WI-101-4 WAS WI-101-1	3/21/56	3	MB	WSE	ASS.
B	2	ITEM 8 ADDED	2-7-55	2	MB	WSE	ASS.
A	1	18 AWG WIRE COLORS CHGD.	10/21/54	1	ESS	WSE	ASS.

1	8	PL-101-1	CONNECTOR, MALE
16 1/2	7	PX-100-1-208	INSULATION, SLEEVING
20"	6	WI-101-4	CABLE, SHIELD, FLEXIBLE
19 3/4"	5	SRIR-3/5(7)-22-U-00	CABLE, INSULATED STRANDED
18 3/4"	4	SRIR-3/5(7)-22-U-96	CABLE, INSULATED STRANDED
19 1/2"	3	SRIR-3/5(7)-22-U-22	CABLE, INSULATED STRANDED
19 1/4"	2	SRIR-10)-20-U-11	CABLE, INSULATED STRANDED
19 1/2"	1	SRIR-3/5(7)-22-U-92	CABLE, INSULATED STRANDED

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
<b>THE TECHNICAL MATERIEL CORP.</b>			
MAMARONECK, NEW YORK			
VMO CABLE			
MATERIAL		WEIGHT PER PC.	
TYPE & TEMPER		WSE 9-12-52	
DRAWN		ELEC. DES. APP. MECH. DES. APP.	
HEAT TREAT. SPEC.		CHECKED FINAL APPROVAL	
FINISH & SPEC. NO.		CA-120 C	

REQ PER UNIT	MODEL	PROJECT NO.	ASS'Y. NO.	DATE
1	VOX 3	291		2-7-55
1	PMO 2	285		8/17/54
1	VOX	101	A-585	9-12-52

USED ON