

STANDARD DRAWING

CA-130

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES


USED ON

PROJECT NO.

MODEL

ASSY. NO.

DATE

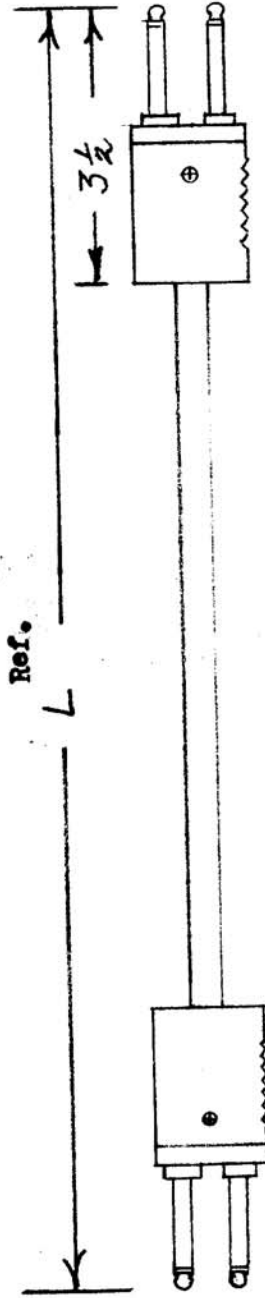

TMC No.	ADC No.	Nomenclature	L
CA-130-1	PJ-11	1 Foot	1-1/2'
CA-130-2	PJ-12	2 Feet	2-1/2'
CA-130-3	PJ-13	3 Feet	3-1/2'
CA-130-4	PJ-14	4 Feet	4-1/2'
CA-130-5	PJ-15	5 Feet	5-1/2'
CA-130-6	PJ-10	10 Feet	10-1/2'

Specifications:
 Plugs shall be of twin type, insulated for 500 volts R.M.S. breakdown.
 Cord shall be tinned copper 2-conductors stranded wire, completely shielded and insulated. Heavy braid cover. Shield grounded at both ends of cord.

Ref. Audio Development Co.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
		CORD, AUDIO-PATCH	
		STOCK SIZE	
		MATERIAL	WEIGHT PER FC.
		TYPE & TEMPER	
		HEAT TREAT. SPEC.	
		FINISH & SPEC. NO.	
B 1	CA-130-6 ADDED	220-616381	EA
A 1	-6 ADDED	8/5/50	JL
ISSUE ITEM	CHANGED FROM	DATE	CN. NO.
			DRAFTS CHECKER/ENG. APP.
SCALE			
TOLERANCES			
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.			
DEC. DIM. ±			
FRAC. DIM. ±			
OTHERS			
		FINAL APPROVAL	
		CA-130	B

DRAWN: *[Signature]*
 ELEC. DES. APP. *[Signature]*
 CHECKED: *[Signature]*
 DATE: 10/28/50