


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

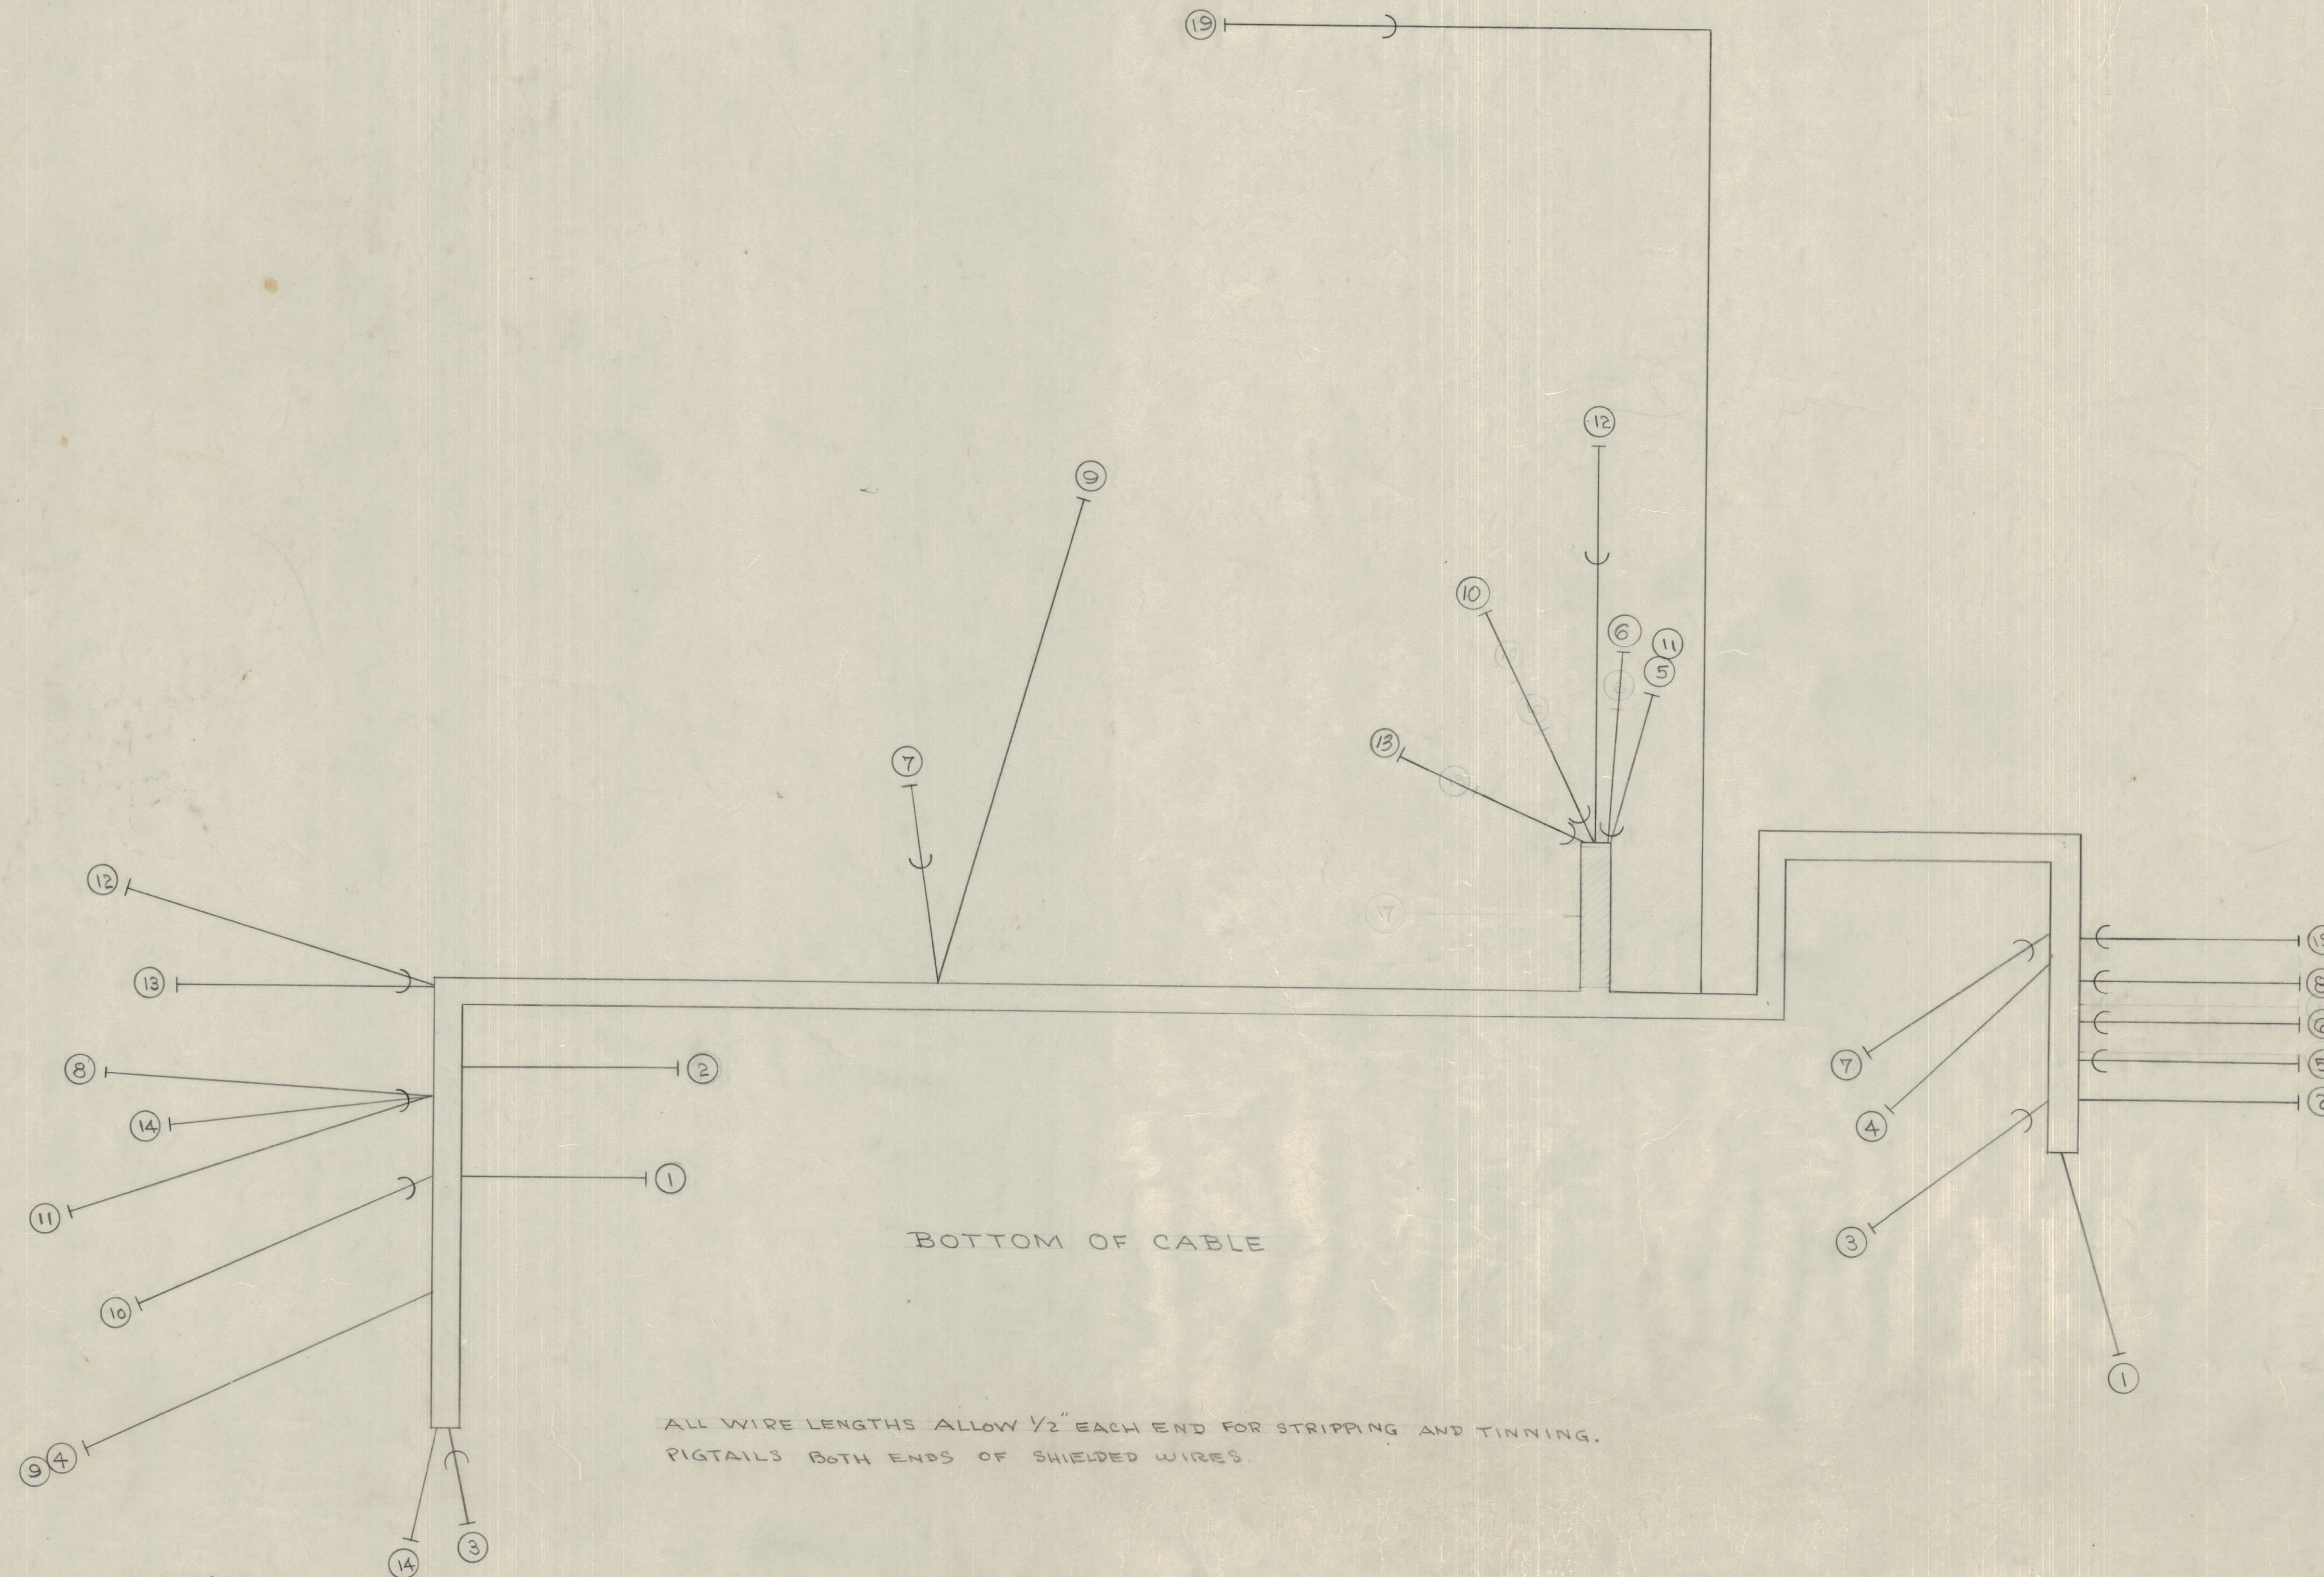

2
 LKX
 1-16-52
 3-16-52
 1-17-52
 1-18-52

CA-134

ALL WIRE LENGTHS ALLOW 1/2" EACH END FOR STRIPPING AND TINNING.
 PIGTAILS BOTH ENDS OF SHIELDED WIRES.

23 1/2	19	MWC 22(7)S3	CABLE, INSULATED, SHIELDED	GRN.
-	18	-	DELETED	
-	17	-	DELETED	
X	16	BS-100	SOLDER, SOFT	
X	15	CD-101-MW	CORD LACING, NYLON	
8 1/2	14	MWC 22(7)U5	CABLE, INSULATED	GRN
18 1/2	13	MWC 22(7)S5	CABLE, INSULATED, SHIELDED	GRN
20 3/4	12	MWC 22(7)S4	CABLE, INSULATED, SHIELDED	YELLOW
19 1/2	11	MWC 22(7)S2	CABLE, INSULATED, SHIELDED	RED
20 3/4	10	MWC 22(7)S3	CABLE, INSULATED, SHIELDED	ORANGE
17 1/2	9	MWC 22(7)U2	CABLE, INSULATED	RED
25 1/2	8	MWC 22(7)S39	CABLE, INSULATED, SHIELDED	WHITE
18 1/4	7	MWC 22(7)S6	CABLE, INSULATED, SHIELDED	BLUE
14 1/2	6	MWC 22(7)S6	CABLE, INSULATED, SHIELDED	BLUE
14 1/2	5	MWC 22(7)S2	CABLE, INSULATED, SHIELDED	RED
27 1/2	4	MWC 22(7)U2	CABLE, INSULATED	RED
27 1/2	3	MWC 22(7)S39	CABLE, INSULATED, SHIELDED	WHITE
25 1/4	2	MWC 22(7)U6	CABLE, INSULATED	BLUE
25 1/2	1	MWC 22(7)U4	CABLE, INSULATED	YELLOW

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
K	1	WIRE LENGTHS INCREASED	2-7-52	BITO			
K	2	ITEM (3) WAS WI-101-4	2-25-52	8296			
K	1	ITEM (E) WAS WI-101-4					
K	3	ITEM 15 WAS CD-100-1					
K	2	ITEM 18 DELETED					
J	4	ENBUID UP ALL MWC WIRE	7-15-51	5260	G.D.L.	R.K.	A.J.J.
H	1	ITEMS CHGD, 19, 13, 16, 17 & SHIELD LGTHS ADDED	4-23-52	8	J.H.B.	R.K.	A.J.J.
G	2	ITEM 10 WAS 13 3/4	3-2-52	7	J.H.B.	R.K.	A.J.J.
F	1	ITEM 6 WAS 13	9-1-52	6	J.H.B.	R.K.	A.J.J.
F	2	ITEM 13 WAS 18 1/2					
F	1	ITEM 10 WAS 19 1/2					
E	1	ITEMS 6, 7 & 19 WERE WI-101-4	7-15-51	5	G.D.L.	R.K.	A.J.J.
D	2	WIRE LENGTHS CHGD	7-15-51	4	G.D.L.	R.K.	A.J.J.
D	1	ITEM 13 ADDED					
C	3	ITEM 13 ADDED					
C	2	ITEMS 5, 10, 11, 13 WERE WI-113	1-17-51	3	G.D.L.	R.K.	A.J.J.
C	1	ITEMS 2, 6, 7, 8 WERE WI-113					
B	2	CABLE CHANGED	5-16-52	2	G.D.L.	R.K.	A.J.J.
B	1	REDRAWN					

FORM - 111
 TOLERANCES: DEC. DIM. ±, ANGULAR DIM. ±
 DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

FFR-2	104	A-263	11-26-52
MODEL	PROJECT NO.	ASSY. NO.	DATE

THE TECHNICAL MATERIEL CORP.			
MAMARONECK, NEW YORK			
CABLE HARNESS ASSY.			
SIGNAL			
TYPE & TEMPER	CDD-513-S3	DRAWN	ELEC. DES. APP. MECH. DES. APP.
HEAT TREAT. SPEC.	110-5/15/57	CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.	SUPER CODES	FFR	CA-134