


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence and engineering information shown hereon may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

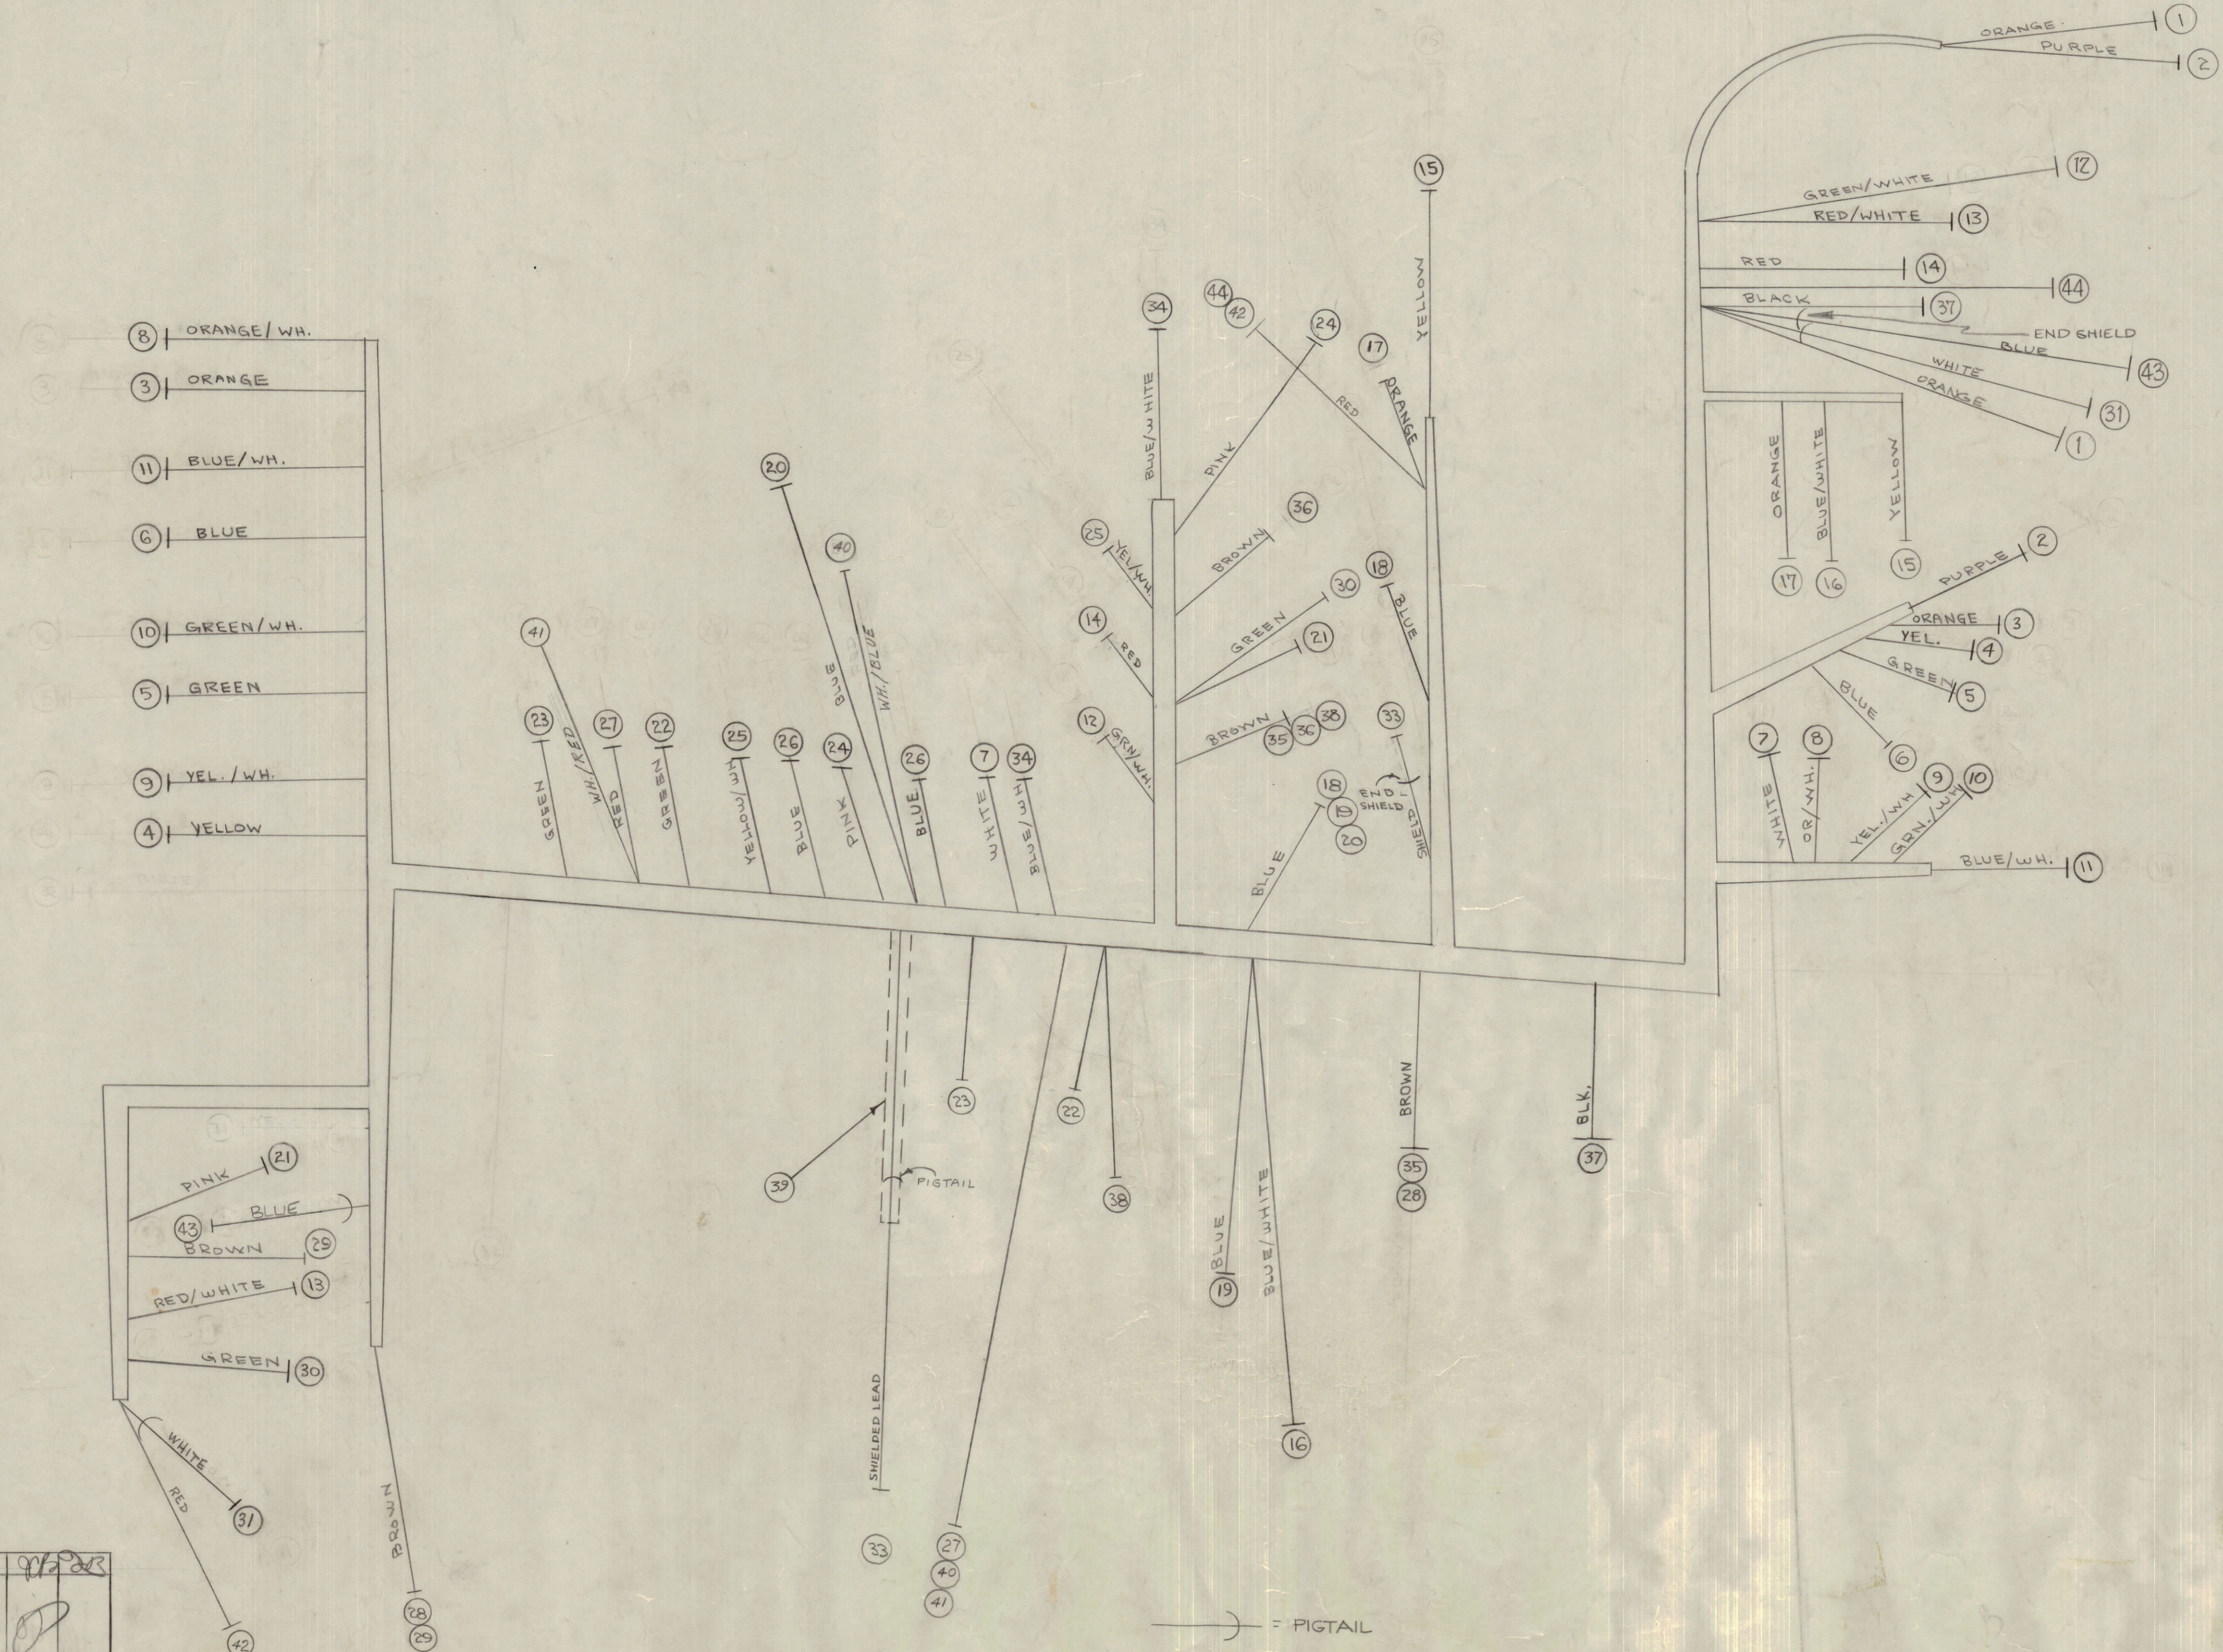

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
G	5	B/M REVISED	11/9/64	17198	RME		
	4	added item 44 MWC22(7)U PINK	10/15/64	1458			
	3	added item 43 MWC22(7)U B	10/15/64	1458			
	2	ITEM 31 RELOCATED & CHANGED MWC 22(7)U-1 TO MWC22(7)U-2	10/15/64	1458			
	1	ITEM 12 ELONGATED 1 INCH	10/15/64	1458			
	1	ITEM 1 RELOCATED	10/15/64	1458			
E	1	ITEM 42 LENGTH ADDED	12/4/64	5	16		
D	1	ITEM 41 WAS 1334, 34 NOS 9	11/19/64	4	16		
C	1	ITEM 42 ADDED	11/19/64	3	16		
B	1	ITEMS 40 & 41 ADDED	11/19/64	3	16		
A	1	ITEM 27 RELOCATED	11/19/64	3	16		
	1	WIRE LENGTHS CHANGED	7/2/64	1	16		
	1	WIRE LENGTHS CHANGED & ADDED	7/2/64	1	16		

REQ. NO.	ITEM	PART NO.	DESCRIPTION	STRIP (IN CHIPS)	SYMBOL
X 46	CD1014NW		NYLON LACING CORD		
X 45	BS100		SOLDER, TIN ALLOY		
20 3/4	44	MWC22(7)U-1	CABLE, INSULATED		PINK
28 1/2	43	MWC22(7)U-2	CABLE, SHIELD, FLEX		BLUE
29 1/2	42	MWC22(7)U-2	CABLE, INSULATED		RED
14	41	MWC22(7)U-92	CABLE, INSULATED		W/RED
12 1/4	40	MWC22(7)U-96	CABLE, INSULATED		W/BLUE
3	39	PK104-1-118	INSULATION, SLEEVING		BLK.
7 1/4	38	MWC20(7)U-1	CABLE, INSULATED (BRN)	1/2	
13 1/4	37	MWC20(7)U-0			(BLK) 1/2
5 1/4	36	MWC20(7)U-1			(BRN) 1/2
8 1/4	35	MWC20(7)U-1			(BRN) 1/2
9 3/4	34	MWC22(7)U-96	CABLE, INSULATED (WH/BL)	3/4	
15 1/4	33	MWC22(7)U-96	CABLE, SHIELD FLEX.	3/4	
	32		DELETED		
34 1/4	31	MWC22(7)U-9	CABLE, SHIELD, FLEX.	1/2	WH/BL
22 1/4	30	MWC22(7)U-5	CABLE, INSULATED	1/2	GREEN
18 1/4	29	MWC20(7)U-1			BRN.
20 1/4	28	MWC20(7)U-1			BRN.
13	27	MWC22(7)U-2			RED
5	26				BLUE
11	25				WH/BL
11 1/4	24				PINK
8 1/8	23				1/2 GRN.
8 1/8	22				1/2 GRN.
20	21				1/2 PINK
10 1/4	20				1/2 BLUE
6	19				1/2 BLUE
9	18				3/4 BLUE
18	17				3/4 OR.
19 1/4	16				1/2 WH/BL.
20 3/4	15				3/4 YEL.
19 1/4	14				3/4 RED
33 1/4	13				1/2 WH/RED
20	12				3/4 WH/GR.
24 1/4	11				1/2 WH/BL.
28 1/4	10				1/2 WH/GR.
24 3/8	9				1/2 WH/YEL.
24 3/8	8				1/2 WH/OR.
12 1/2	7				1/2 WHITE
24 3/8	6				1/2 BLUE
23 3/4	5				1/2 GREEN
28 1/2	4				1/2 YEL.
27	3				1/2 OR.
15 1/2	2				1/2 PUR.
B 1/4	1	MWC22(7)U-3	CABLE, INSULATED	1/2	OR.

STOCK SIZE		MATERIAL		TYPE & TEMPER		HEAT TREAT. SPEC.		FINISH & SPEC. NO.	
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK									
CABLE ASSEMBLY									
SIGNAL									
DRAWN		ELEC. DES. APP.		MECH. DES. APP.		CHECKED		FINAL APPROVAL	
XFK		H. J. J.		H. J. J.		H. J. J.		H. J. J.	
PROJECT NO. CA-194		ASSY. NO.		DATE 10-15-63		SUPERCEDES QEMOD4		CA-151 G	