

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.
 MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.


NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture any item shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

- | INDICATES NAIL AT END OF WIRE.
- X INDICATES NAIL AT BREAKOUT OR BEND.
-) INDICATES PIGTAIL OR END OF SHIELD.
- ALL WIRE LENGTHS ALLOW 1/2" EACH END FOR STRIPPING.

BOTTOM OF CABLE

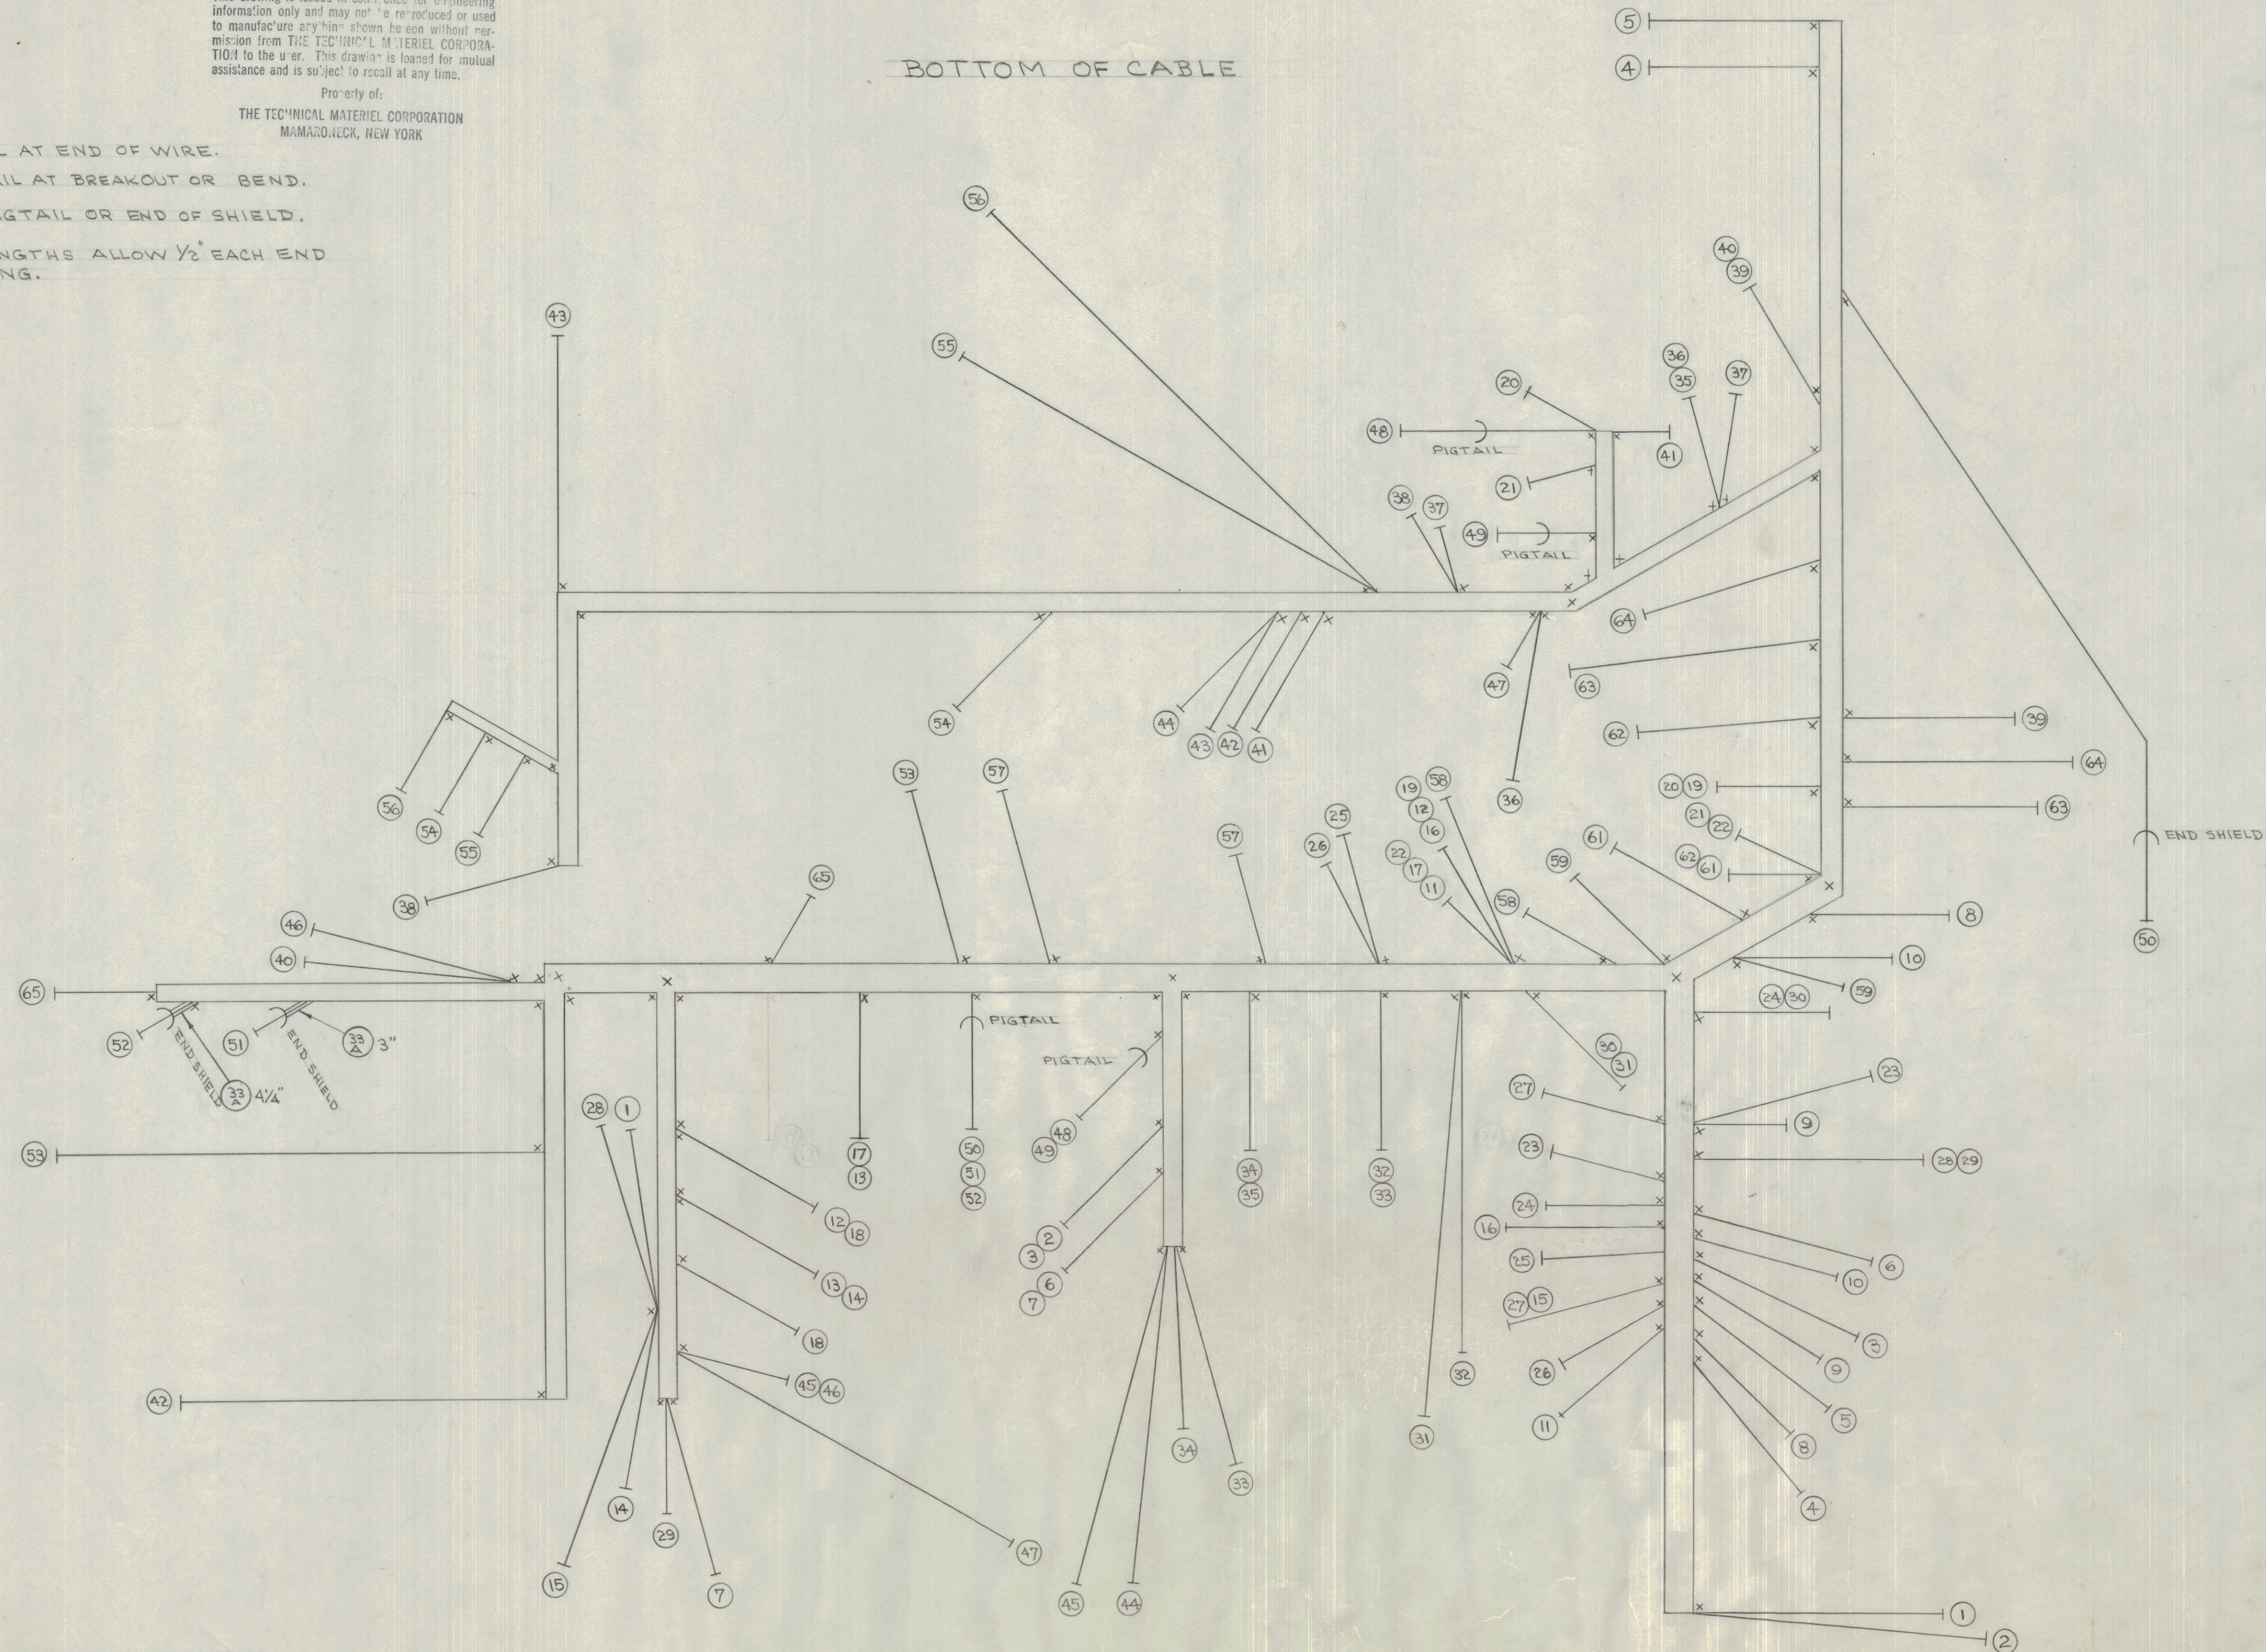

ITEM	QTY	PART NO.	DESCRIPTION	SHIELD SYMBOL
67	1	CD-100-1	CORD LACING, NYLON	
5 1/2	66	WI-101-4	SHIELD (FOR ITEMS 48-49-52)	
9 3/4	65	SRIR 3/8 (7) 22U00	CABLE, INSULATED (BLK.)	
8	64	SRIR 3/8 (7) 22U PINK	" " (PINK)	
8	63	SRIR 3/8 (7) 22U "	" " "	
5 3/4	62	SRIR 3/8 (7) 22U "	" " "	
4 1/2	61	SRIR 3/8 (7) 22U "	" " "	
	60		DELETED	
4 1/2	59	SRIR 1 (7) 20U 44	CABLE, INSULATED (YEL.)	
5 1/4	58	SRIR 3/8 (7) 22U 66	" " (BLUE)	
6 3/4	57	SRIR 3/8 (7) 22U 66	" " (BLUE)	
20 1/4	56	SRIR 3/8 (7) 22U 77	" " (VIO.)	
18 1/2	55	SRIR 3/8 (7) 22U 66	" " (BLUE)	
11 1/4	54	SRIR 3/8 (7) 22U 96	" " (WH/BLUE)	
15	53	SRIR 3/8 (7) 22U 77	" " (VIO.)	
11 1/2	52	SRIR 3/8 (7) 22U 44	" " (YEL.)	1 1/2"
11	51	WI-101-4	SHIELD, FLEXIBLE	
27 1/4	50	WI-101-4	" "	
19 1/2	49	SRIR 3/8 (7) 22U 66	CABLE, INSULATED (BLUE)	20 1/4"
21 1/4	48	SRIR 3/8 (7) 22U 44	" " (YEL.)	22 1/4"
3 1/8	47	SRIR 3/8 (7) 22U 77	" " (VIO.)	
10	46	SRIR 3/8 (7) 22U 92	" " (WH/RED)	
18 1/4	45	SRIR 3/8 (7) 22U 92	" " "	
28	44	SRIR 3/8 (7) 22U 92	" " "	
13 3/4	43	SRIR 3/8 (7) 22U 92	" " "	
26 1/4	42	SRIR 3/8 (7) 22U 95	" " (WH/GREEN)	
8	41	SRIR 3/8 (7) 22U 96	" " (WH/BLUE)	
24 1/4	40	SRIR 3/8 (7) 22U PINK	" " (PINK)	
2 1/4	39	SRIR 3/8 (7) 22U "	" " "	
16	38	SRIR 3/8 (7) 22U "	" " "	
6 1/2	37	SRIR 3/8 (7) 22U "	" " "	
6 1/4	36	SRIR 3/8 (7) 22U 22	" " (RED)	
1 1/4	35	SRIR 3/8 (7) 22U 22	" " "	
8 1/2	34	SRIR 3/8 (7) 22U 22	" " "	

ITEM	QTY	PART NO.	DESCRIPTION	SHIELD SYMBOL
7 1/4	33A	PX-104-1-133	INSULATION, SLEEVING	
10 1/2	33	SRIR 3/8 (7) 22U 22	CABLE, INSULATED (RED)	
8	32	SRIR 3/8 (7) 22U 22	" " "	
8 1/4	31	SRIR 3/8 (7) 22U 22	" " "	
6 1/4	30	SRIR 3/8 (7) 22U 22	" " "	
22 1/4	29	SRIR 3/8 (7) 22U 88	" " (GREY)	
22 1/4	28	SRIR 3/8 (7) 22U 88	" " "	
6 1/4	27	SRIR 3/8 (7) 22U 00	" " (BLACK)	
10 1/4	26	SRIR 1 (7) 20U 55	" " (GRN.)	
10	25	SRIR 1 (7) 20U 11	" " (BRN.)	
6	24	SRIR 1 (7) 20U 44	" " (YEL.)	
5 1/4	23	SRIR 1 (7) 20U 44	" " "	
6 3/4	22	SRIR 1 (7) 20U 55	" " (GRN.)	
11 1/2	21	SRIR 1 (7) 20U 55	" " (GRN.)	
11	20	SRIR 1 (7) 20U 11	" " (BRN.)	
8 1/8	19	SRIR 1 (7) 20U 11	" " "	
6	18	SRIR 1 (7) 20U 11	" " "	
11 1/4	17	SRIR 1 (7) 20U 55	" " (GRN.)	
8 1/4	16	SRIR 1 (7) 20U 11	" " (BRN.)	
23 3/8	15	SRIR 1 (7) 20U 00	" " (BLK.)	
6 1/4	14	SRIR 1 (7) 20U 55	" " (GRN.)	
9	13	SRIR 1 (7) 20U 55	" " "	
15 1/2	12	SRIR 1 (7) 20U 11	" " (BRN.)	
9	11	SRIR 1 (7) 20U 55	" " (GRN.)	
7 3/4	10	SRIR 3/8 (7) 22U 66	" " (BLUE)	
5 3/4	9	SRIR 3/8 (7) 22U 00	" " (BLK.)	
9 1/2	8	SRIR 3/8 (7) 22U 66	" " (BLUE)	
11 5/8	7	SRIR 1 (7) 20U 99	" " (WHITE)	
15 1/4	6	SRIR 1 (7) 20U 99	" " "	
20	5	SRIR 1 (7) 20U 99	" " "	
20 1/4	4	SRIR 1 (7) 20U 99	" " "	
15 1/4	3	SRIR 1 (7) 20U 99	" " "	
19 1/4	2	SRIR 1 (7) 20U 99	" " "	
27 1/2	1	SRIR 1 (7) 20U 99	" " "	

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
C	1	WI-101-4 WAS WL-103-1	1/16/53	3	RD	END	WJC
B	1	#17 & 13 POSITION CHANGED WIRE LENGTHS CHANGED	2/14/53	2	VB	IND	G.T.O.
A	1	REDRAWN W/CHANGES	7/9/53	1	GD	IND	G.T.O.

DVM	PROJECT NO.	ASSY. NO.	7-9-53
MODEL	PROJECT NO.	ASSY. NO.	DATE
USED ON			

REG. ITEM	PART NO.	DESCRIPTION	SHIELD SYMBOL
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
CABLE POWER SUPPLY			
MATERIAL		WEIGHT PER PFC.	
TYPE & TEMPER		DATE	7/9/53
HEAT TREAT. SPEC.		DRAWN	G.T.O.
FINISH & SPEC. NO.		ELEC. DES. APP.	G.T.O.
		MECH. DES. APP.	
		CHECKED	CA-156
		FINAL APPROVAL	