


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
 THE TECHNICAL MATERIEL CORPORATION
 MAMARONECK, NEW YORK

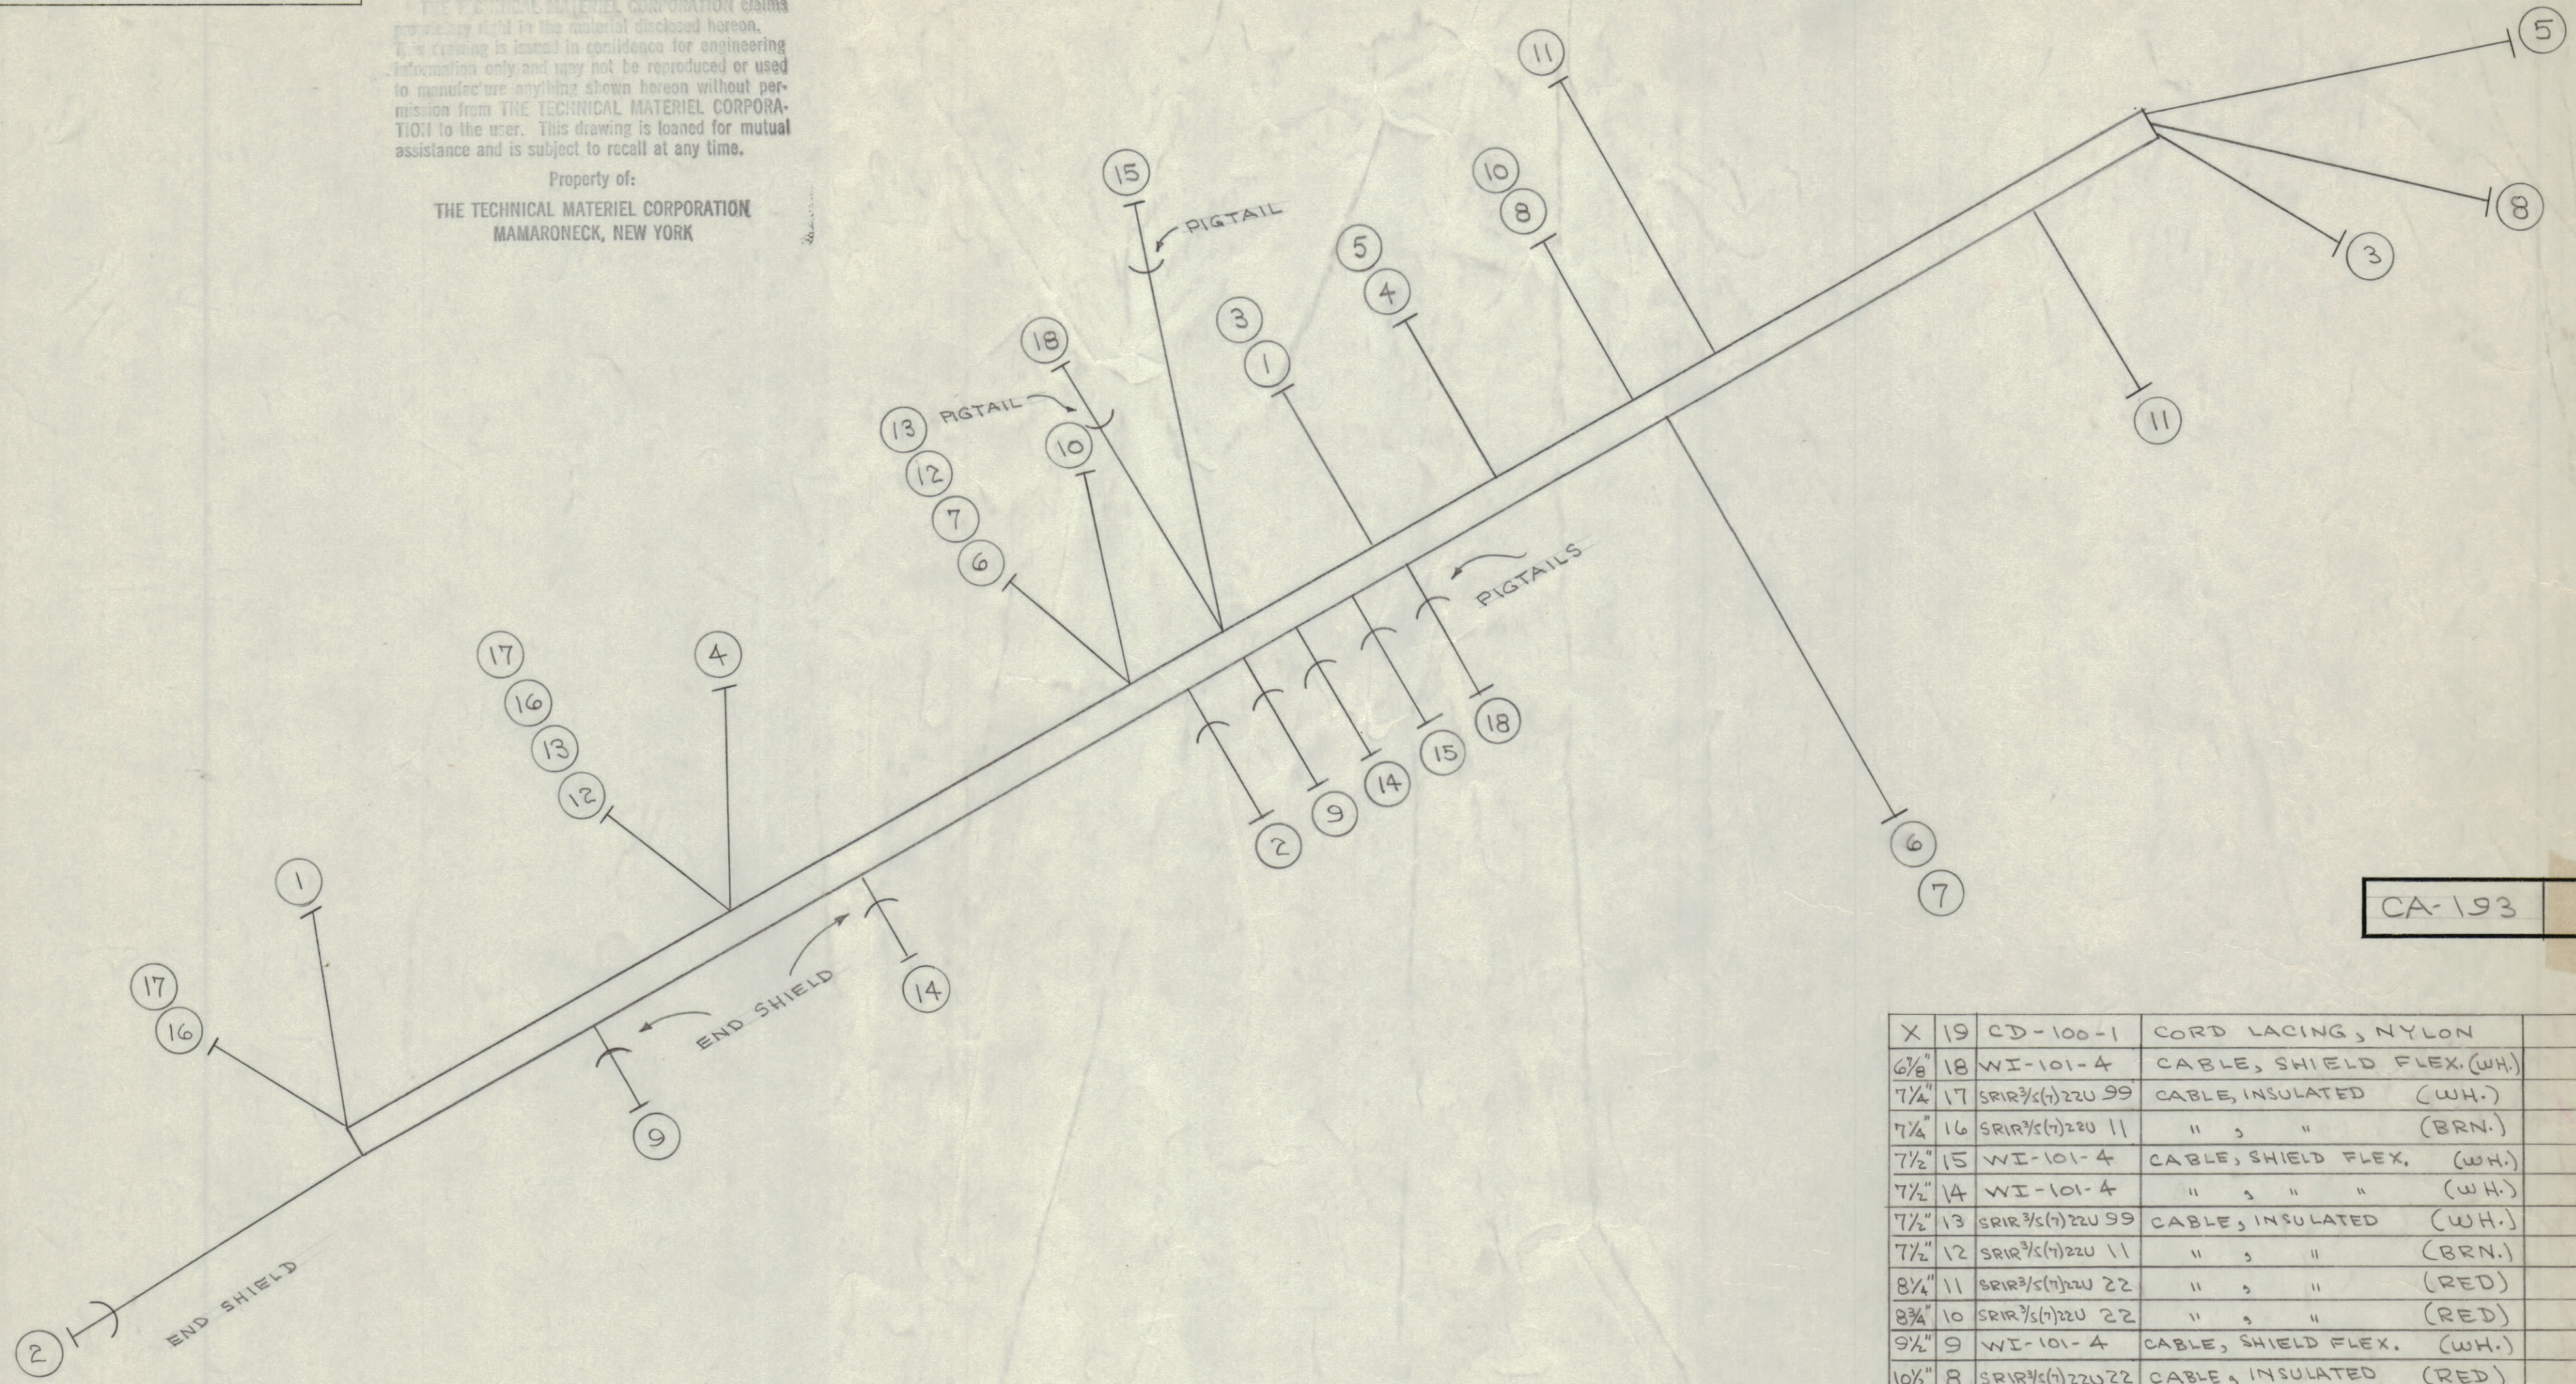

CA-193

X	19	CD-100-1	CORD LACING, NYLON	
6 7/8"	18	WI-101-4	CABLE, SHIELD FLEX. (WH.)	
7 1/4"	17	SR1R 3/5 (7) 22U 99	CABLE, INSULATED (WH.)	
7 1/4"	16	SR1R 3/5 (7) 22U 11	" " (BRN.)	
7 1/2"	15	WI-101-4	CABLE, SHIELD FLEX. (WH.)	
7 1/2"	14	WI-101-4	" " " (WH.)	
7 1/2"	13	SR1R 3/5 (7) 22U 99	CABLE, INSULATED (WH.)	
7 1/2"	12	SR1R 3/5 (7) 22U 11	" " (BRN.)	
8 1/4"	11	SR1R 3/5 (7) 22U 22	" " (RED)	
8 3/4"	10	SR1R 3/5 (7) 22U 22	" " (RED)	
9 1/2"	9	WI-101-4	CABLE, SHIELD FLEX. (WH.)	
10 1/2"	8	SR1R 3/5 (7) 22U 22	CABLE, INSULATED (RED)	
11"	7	SR1R 3/5 (7) 22U 11	" " (BRN.)	
11"	6	SR1R 3/5 (7) 22U 99	" " (WH.)	
11"	5	SR1R 3/5 (7) 22U 22	" " (RED)	
11"	4	SR1R 3/5 (7) 22U 22	" " (RED)	
11 1/2"	3	SR1R 3/5 (7) 22U 22	" " (RED)	
12 1/2"	2	WI-101-4	CABLE, SHIELD FLEX. (WH.)	
13 1/2"	1	SR1R 3/5 (7) 22U 22	CABLE, INSULATED (RED)	

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
#			
STOCK SIZE			
#			
MATERIAL WEIGHT PER PC.			
#			
TYPE & TEMPER			
#			
HEAT TREAT. SPEC.			
#			
FINISH & SPEC. NO.			

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES							
SCALE: #							
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.							

RSC-1	170	10-3-53
MODEL	PROJECT NO.	ASS'Y. NO.
USED ON		