


REQ. PER UNIT	MODEL	USED ON
	RTMU-1	ASSY. NO.
		DATE
		CA1008

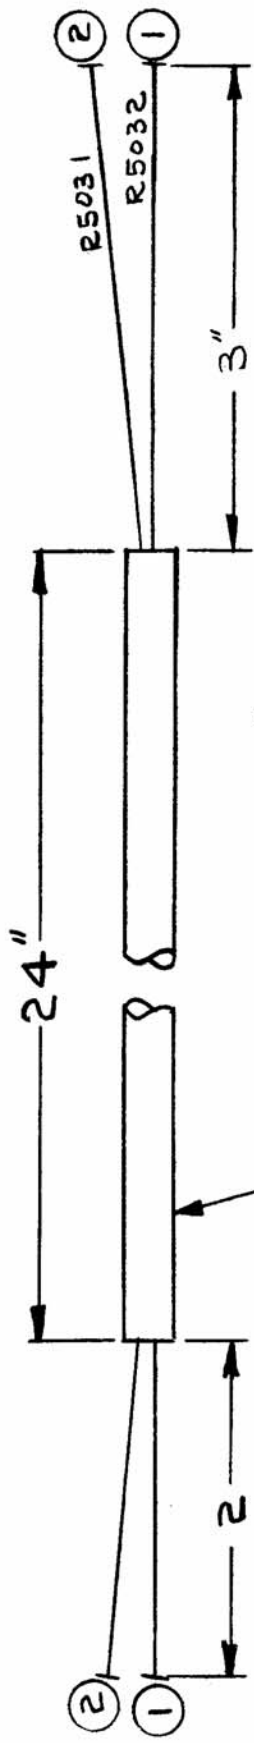

OBSOLETE
REPLACED
BY TMC PT
NO. 1061-2
CA 1061-2

THIS SYMBOL DENOTES END OF INSULATION & NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT & TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 4	BS100	SOLDER, TIN ALLOY	
24 3	PX100-1-B	INSULATION SLEEVING	
2	MWC22(1)J93	BIN 1, J5020 PIN 36	R5031
1	MWC22(1)J7	BIN 1, J5020 PIN 40	R5032
	F. EATON		
		THE TECHNICAL MATERIEL CORP. MAMARONECK. NEW YORK	
		WIRING HARNESS	
		DRAWN	
		CHECKED	
		FINAL APPROVAL	
		MECH. DES. APP.	
		MECH. DES. APP.	
		FINISH & SPEC. NO.	CA1008

DATE	4-21-65	CH. NO.	X	DRAFTS	CHECKER	ENG. APP.
DESCRIPTION	ORIGINAL RELEASE	DATE	4-21-65	CH. NO.	X	SCALE
DESCRIPTION	EXPER. RELEASE	DATE	4-21-65	CH. NO.	X	SCALE
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						
TOLERANCES	FRACTIONS					
.X ± .05	± 1/64					
.XX ± .01	ANGLES					
.XXX ± .005	± 0° 30'					
CODE	A					