REQ. PER UNIT	USED ON			CA1020	Ø
	MODEL	ASS'Y. NO.	DATE		
1	KIT-215	AX 546	2-25-65		
1	KIT-216	AX546	2.25-65		

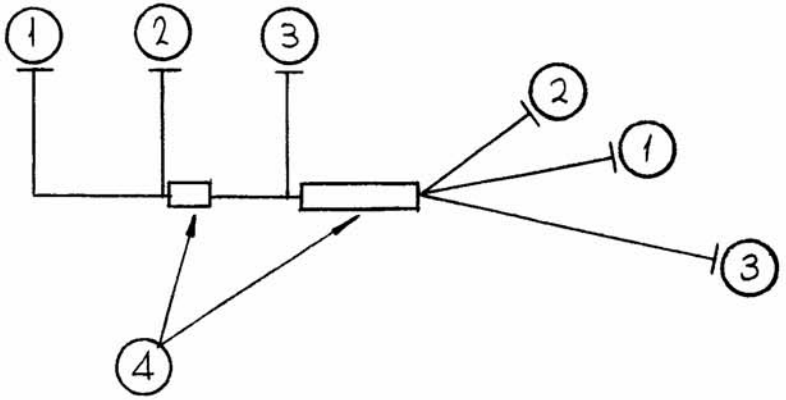

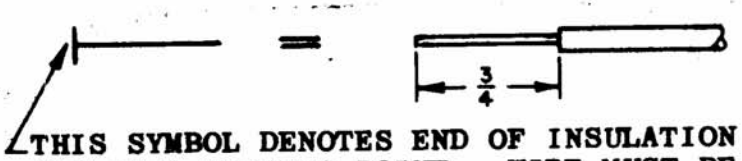

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

Ø	ORIGINAL RELEASE FOR PRODUCTION	J.265	Ø	JL		
X	EXP. RELEASE	2-25-65	X	SRG		
SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE 1:1

TOLERANCES
DECIMALS .X ±.05, .XX ±.01, .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

REQ.	ITEM	PART NO.	FROM DESCRIPTION	TO	SYMBOL
X	5	BS100	SOLDER, TIN ALLOY		
	4	PX830-18	SLEEVING, SHRINK		
	3	LWC 26(7)U5	K1-5	J3 HOT	
	2	LWC 26(7)U6	K1-6	J2 HOT	
	1	LWC 26(7)U7	K1-7	J1 HOT	

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
BUDETTI MAMARONECK. NEW YORK

WIRING HARNESS, BRANCHED

DRAWN	CHECKED	FINAL APPROVAL
SRG		
ELEC. DES. APP.	MECH. DES. APP.	CA1020 Ø

TMC FORM 108-A

REPROVEL NO. 440H 21840