



REQ. PER UNIT	MODEL	USED ON	DATE
1	KIT-215	ABBY. NO.	1-25-65
1	KIT-216	AX-546	1-25-65

CA1021

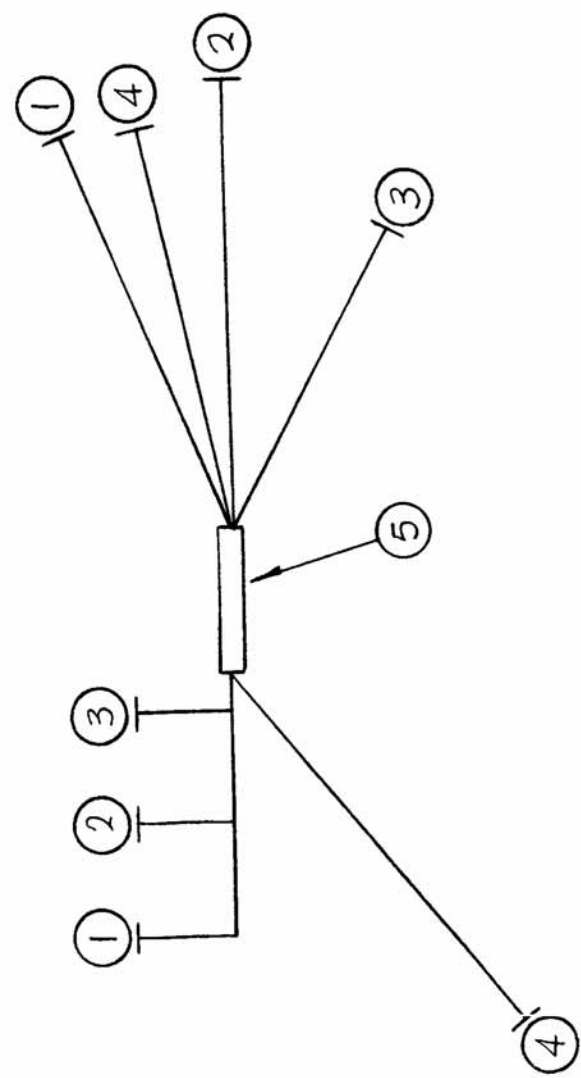

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

X	6	BS100	SOLDER, TIN ALLOY	SYMBOL
	5	PX830-18	SLEEVING, SHRINK	FROM DESCRIPTION TO
	4	LWC26(7)UO	GND LUG	Q1-E
	3	U91	K1-10	TB-10
	2	U9	K1-9	TB1-9
	1	LWC26(7)U8	K1-8	TB1-8
REQ. ITEM		PART NO.	FROM DESCRIPTION TO	SYMBOL
		STOCK SIZE	THE TECHNICAL MATERIEL CORP. BUDETTI MAMARONECK. NEW YORK	
		MATERIAL	WIRING HARNESS, BRANCHED	
TYPE & TEMPER		HEAT TREAT. SPEC	SRG	SRG
FINISH & SPEC. NO.			DRAWN	FINAL APPROVAL
			MECH. DES. APP.	CA1021
			ELEC. DES. APP.	

DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
3-2-65	0	2L	SRG	
2-25-65	X			
DESCRIPTION		SCALE	CODE	
UNLESS OTHERWISE SPECIFIED		1:1	A	
DIMENSIONS ARE IN INCHES AND INCLUDE		TOLERANCES		
CHEMICALLY APPLIED OR PLATED FINISHES		FRACTIONS		
DECIMALS		ANGLES		
.X ± .05		± 1/64		
.XX ± .01		± 0° 30'		
.XXX ± .005				