REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CA1047	A
	AX559				

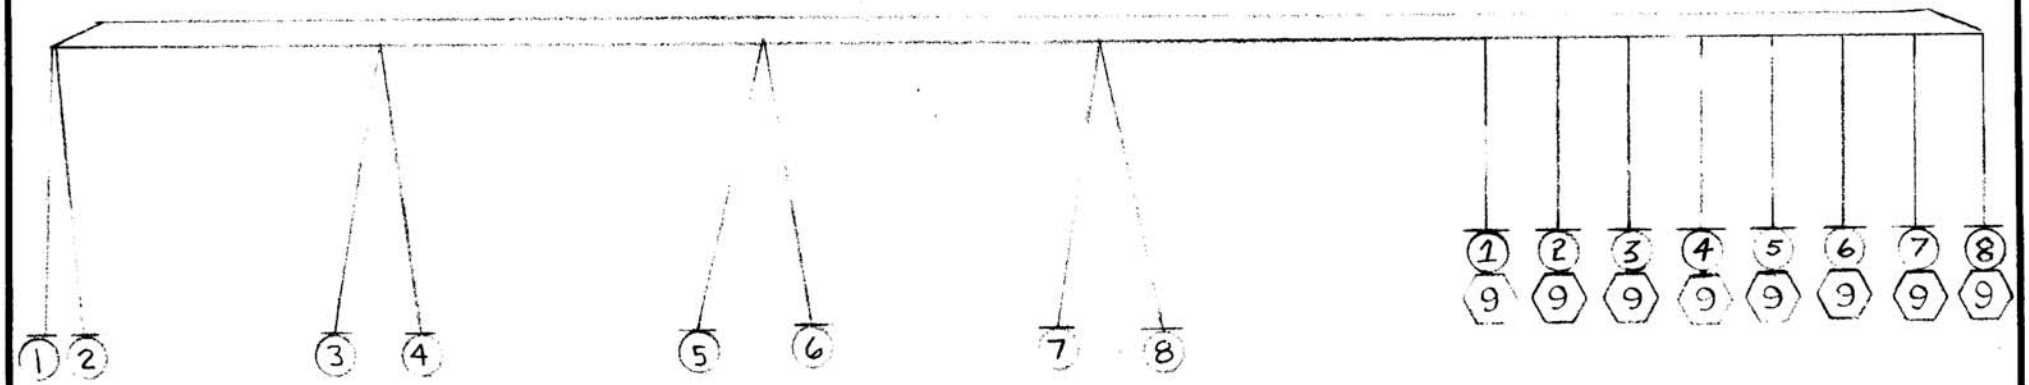

⬡ - DENOTES LUG

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
X	11	BS-100	SOLDER, TIN ALLOY	
X	10	CD-101-1 MW	CORD, NYLON, LACING	BLACK
8	9	TE-120-2	LUG, SPADE	
✓	8	MWC 20(7)U94	WIRE, ELEC. INSULATED	WH/YELLOW
X	7	4		YELLOW
X	6	93		WH/ORANGE
X	5	3		ORANGE
X	4	92		WH/RED
X	3	2		RED
X	2	91		WH/BROWN
X	1	MWC 20(7)U1	WIRE, ELEC. INSULATED	BROWN

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
A	PICT. I.T. 1 THRU 8 NO'S. REVERSED.	3.29.65	13748	J.F.	JCB	
Ø	FINAL RELEASE FOR PRODUCTION	2/24/65				
X	EXPER. RELEASE	2.19.65		HLA		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

TOLERANCES
DECIMALS .X ±.05, .XX ± .01, .XXX ± .005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

SCALE

CODE

STOCK SIZE

MATERIAL

TYPE & TEMPER | HEAT TREAT. SPEC.

FINISH & SPEC. NO.

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CABLE

DRAWN	CHECKED	FINAL APPROVAL
	JCB	RDC
2-24-65		CA-1047 A

ELEC. DES. APP. | MECH. DES. APP.

CURRENCY NO. 140M 18323