REQ. PER UNIT	USED ON MODEL	ASS'Y. NO.	DATE	CA1098	Ø
1	KMCU-1		4-26-65		

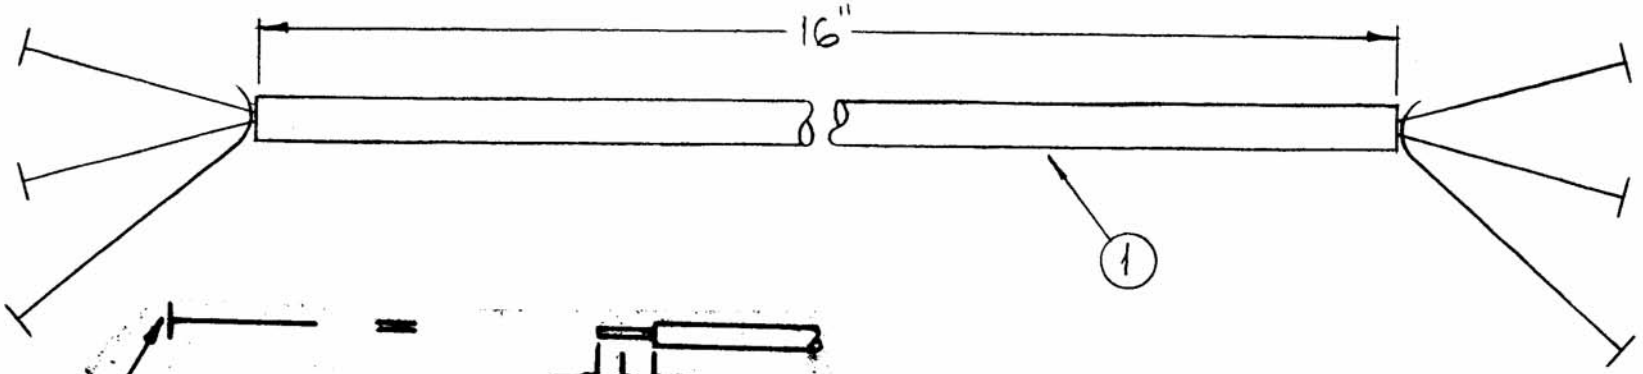

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/4" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

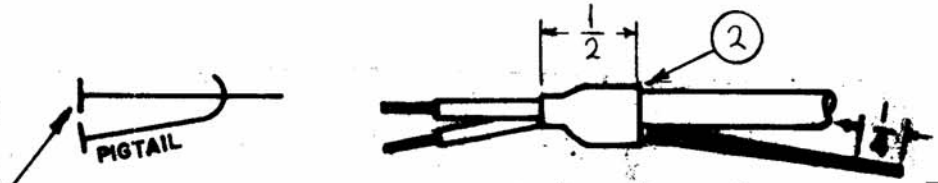

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH. AND SHRINK ITEM 2.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
	3	BS100	SOLDER, TIN ALLOY	
	2	PX 830-8-1	SHRINK, TUBING	
	1	W1142-5	CBL, SPL PURPOSE, SHLD JKT	

F. BUDETTI

THE TECHNICAL MATERIEL CORP.
MAMARONECK. NEW YORK

CABLE, ELECTRICAL

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE FOR PRODUCTION	4-30-65	Ø	DL		
X1	PICTORIAL REVISED	4-26-65	X1	SRG		

STOCK SIZE: —

MATERIAL: —

TYPE & TEMPER: — | HEAT TREAT. SPEC.: —

FINISH & SPEC. NO.: —

DRAWN: SRG | CHECKED | FINAL APPROVAL: 5/3/65

ELEC. DES. APP. | MECH. DES. APP.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

SCALE

TOLERANCES
DECIMALS .X ±.05 .XX ± .01 .XXX ±.005
FRACTIONS ± 1/64
ANGLES ± 0° 30'

CODE A

CA1098 Ø