

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.


MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES

NOTICE TO PERSONS RECEIVING THIS DRAWING

THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

Property of:
THE TECHNICAL MATERIEL CORPORATION
MAMARONECK, NEW YORK

CA10120 B

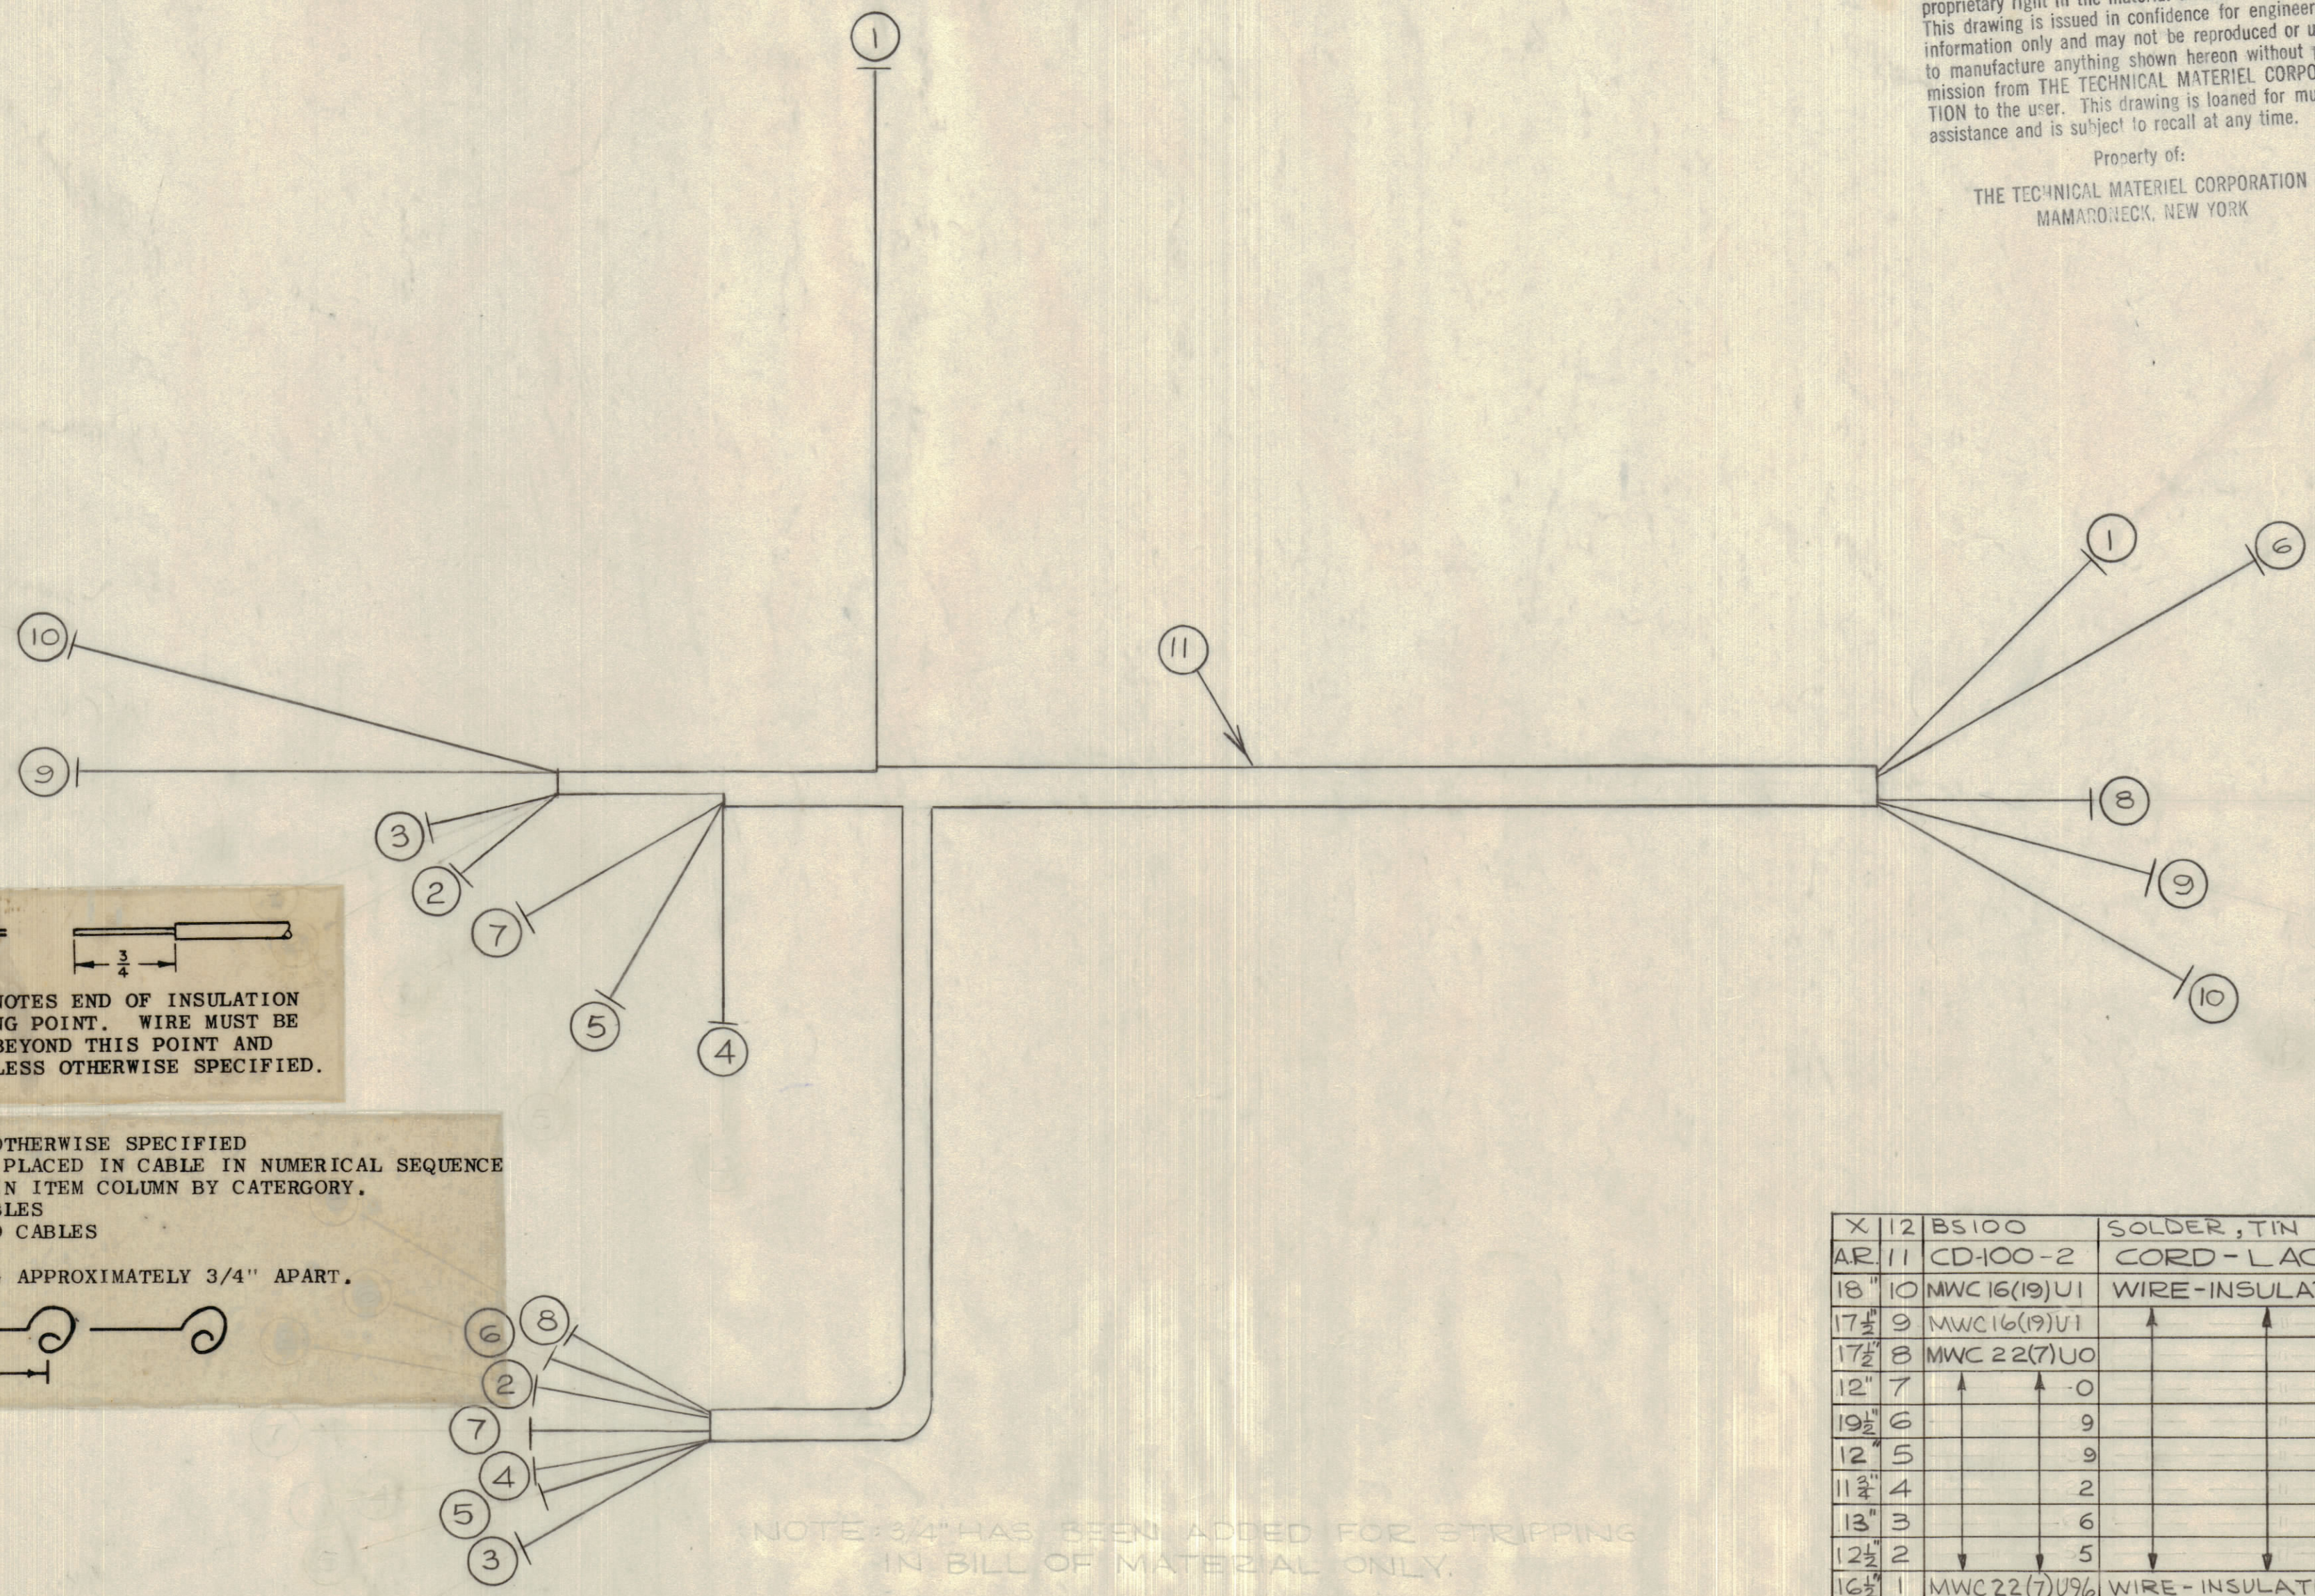

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

NOTE: 3/4" HAS BEEN ADDED FOR STRIPPING IN BILL OF MATERIAL ONLY.

REQ.	ITEM	PART No.	DESCRIPTION	SYMBOL
X	12	BS100	SOLDER, TIN ALLOY	
AR	11	CD-100-2	CORD-LACING	
18"	10	MWC16(19)U1	WIRE-INSULATED BROWN	
17 1/2"	9	MWC16(19)U1		11
17 1/2"	8	MWC 22(7)U0		BLACK
12"	7			11
19 1/2"	6		9	WHITE
12"	5		9	11
11 3/4"	4		2	RED
13"	3		6	BLUE
12 1/2"	2		5	GREEN
16 1/2"	1	MWC 22(7)U96	WIRE-INSULATED WH/BL	

B	DELE. 5,6,2,9,9 OF IT. 2 TO 6	1-28-67	17728	RME	JCS	MM	
A	LENGTHS CORRECTED	JAN 27/61		JPC			
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
TOLERANCES			SCALE: 1:1				
ALL OTHERS	DEC. DIM. ±	FRAC. DIM. ±	ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.			

BAA-1
MAY 19/60
MODEL PROJECT No. ASS'Y. No. DATE
USED ON

TMC (Canada) LIMITED
OTTAWA ONTARIO
HARNESS - BAA-1
JPC
DRAWN
ELEC. DES. APP. MECH. DES. APP.
CHECKED
FINAL APPROVAL
CA 10120 B