


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
B		REDRAWN & ITEMS 7-8 & 10 ADDED	JUNE 24/66	17501	RPL	[Signature]	[Signature]

BKOUT (FROM) COMPONENT		BKOUT (TO) COMPONENT		REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A	STANDOFF	E	C238	14 1/2"	1	MWC22(7)U3	WIRE, ELECTRICAL INSULATED	
A	C244	B	R221 CENTRE TERM.	12"	2	MWC22(7)U5	" " " "	"
A	STANDOFF	B	R216 " "	11 1/2"	3	MWC22(7)U8	" " " "	"
D	STANDOFF	E	C260	8 5/8"	4	MWC22(7)U91	" " " "	"
C	R216 RIGHT TERM.	E	FEEDTHRU	11 3/4"	5	MWC16(9)U8	" " " "	"
B	STANDOFF	E	FEEDTHRU	14"	6	MWC22(7)U4	" " " "	"
C	R213 CENTRE TERM	E	C239	12"	7	MWC22(7)U5	" " " "	"
C	R216 LEFT " "	E	STANDOFF	9"	8	MWC22(7)U8	" " " "	"
					AR 9	CD-101-1-MW	CORD, NYLON LACING	
					AR 10	BS 100	SOLDER, SOFT	

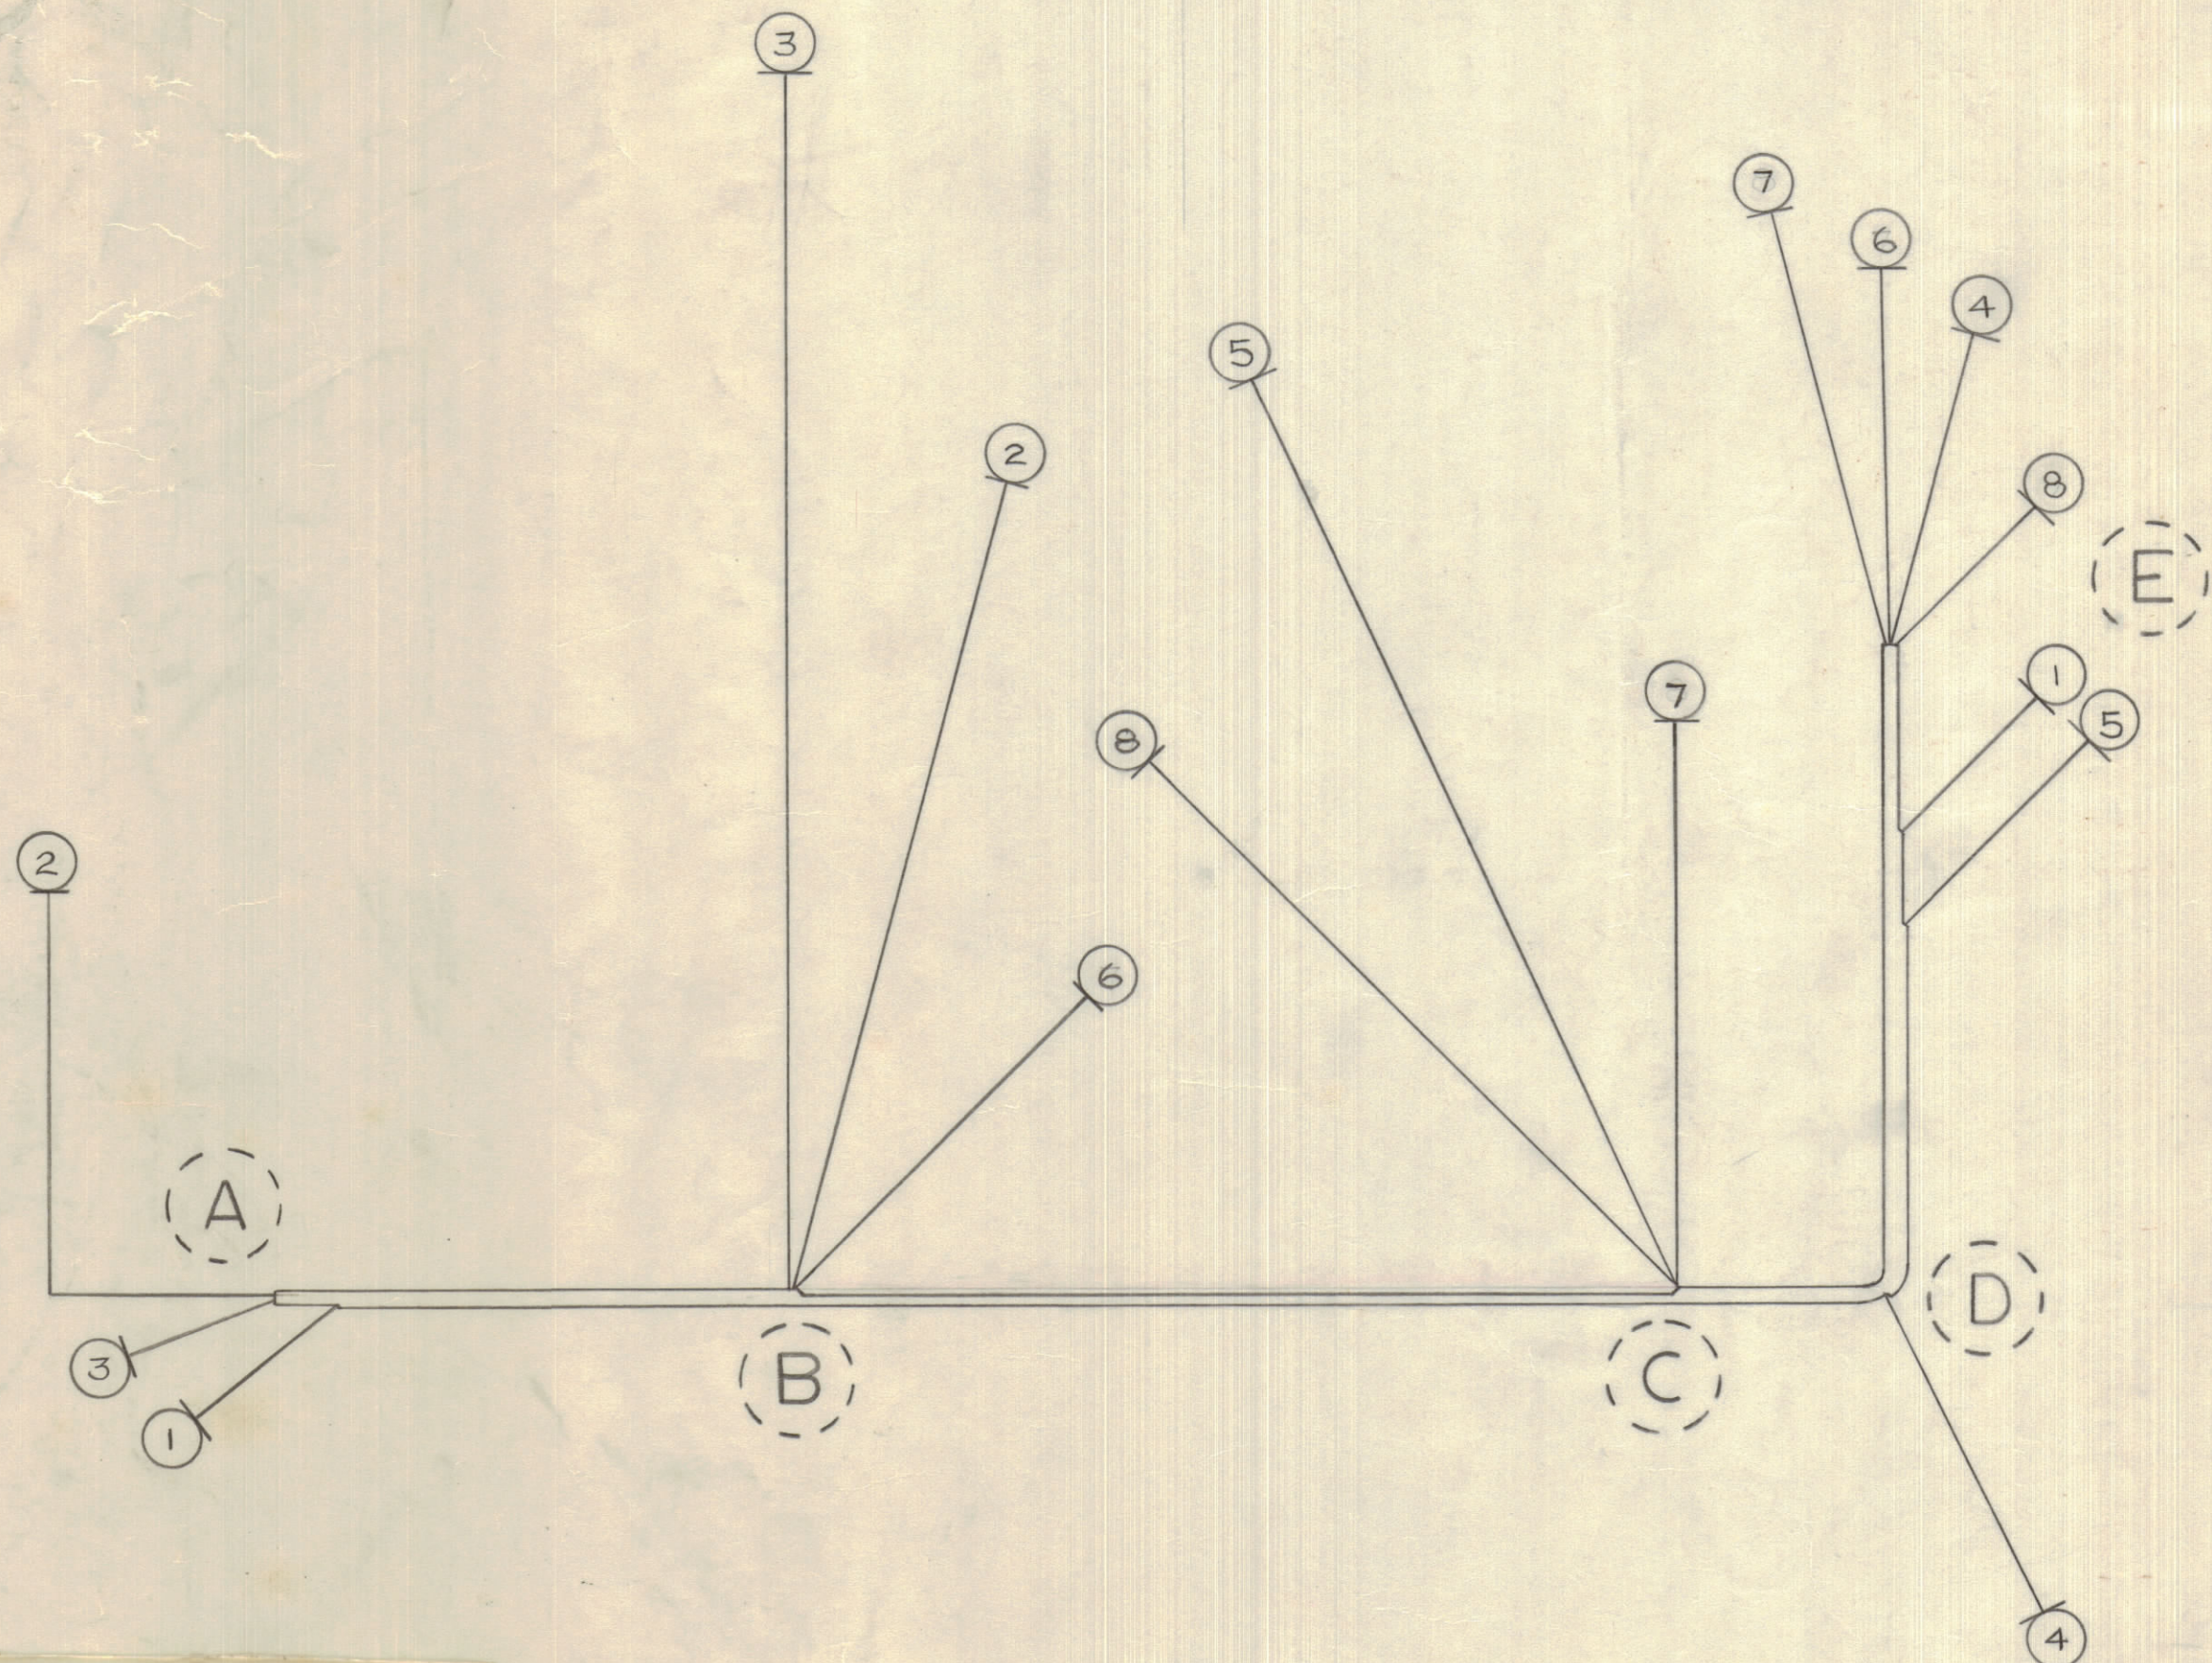

CA10137 B

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.
1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS
SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± FRAC. DIM. ± ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

RFA-1			15/3/61
MODEL	PROJECT NO.	ASSY. NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE ASSY RF SECTION	
TYPE & TEMPER		JPC	
		DRAWN	ELEC. DES. APP. MECH. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL [Signature]
FINISH & SPEC. NO.		CA10137 B	