


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
7 1/2	1	MWC22(7)U8	WIRE, INSULATED	GREY
6 1/2	2	MWC22(7)U8	WIRE, INSULATED	GREY
20	3	MWC22(7)U4	WIRE, INSULATED	YEL
20 1/2	4	MWC22(7)U98	WIRE, INSULATED	W/GREY
11	5	MWC22(7)U1	WIRE, INSULATED	BR
13 1/2	6	MWC22(7)U6	WIRE, INSULATED	BLUE
20 1/2	7	MWC22(7)U2	WIRE, INSULATED	RED
19	8	MWC22(7)U4	WIRE, INSULATED	YEL
2	9	TE156-32945	SOLDERLESS TERMINAL	
7	10	TE156-32950	SOLDERLESS TERMINAL	
A/R	11	CD101-1-MW	CORD, LACING, NYLON	

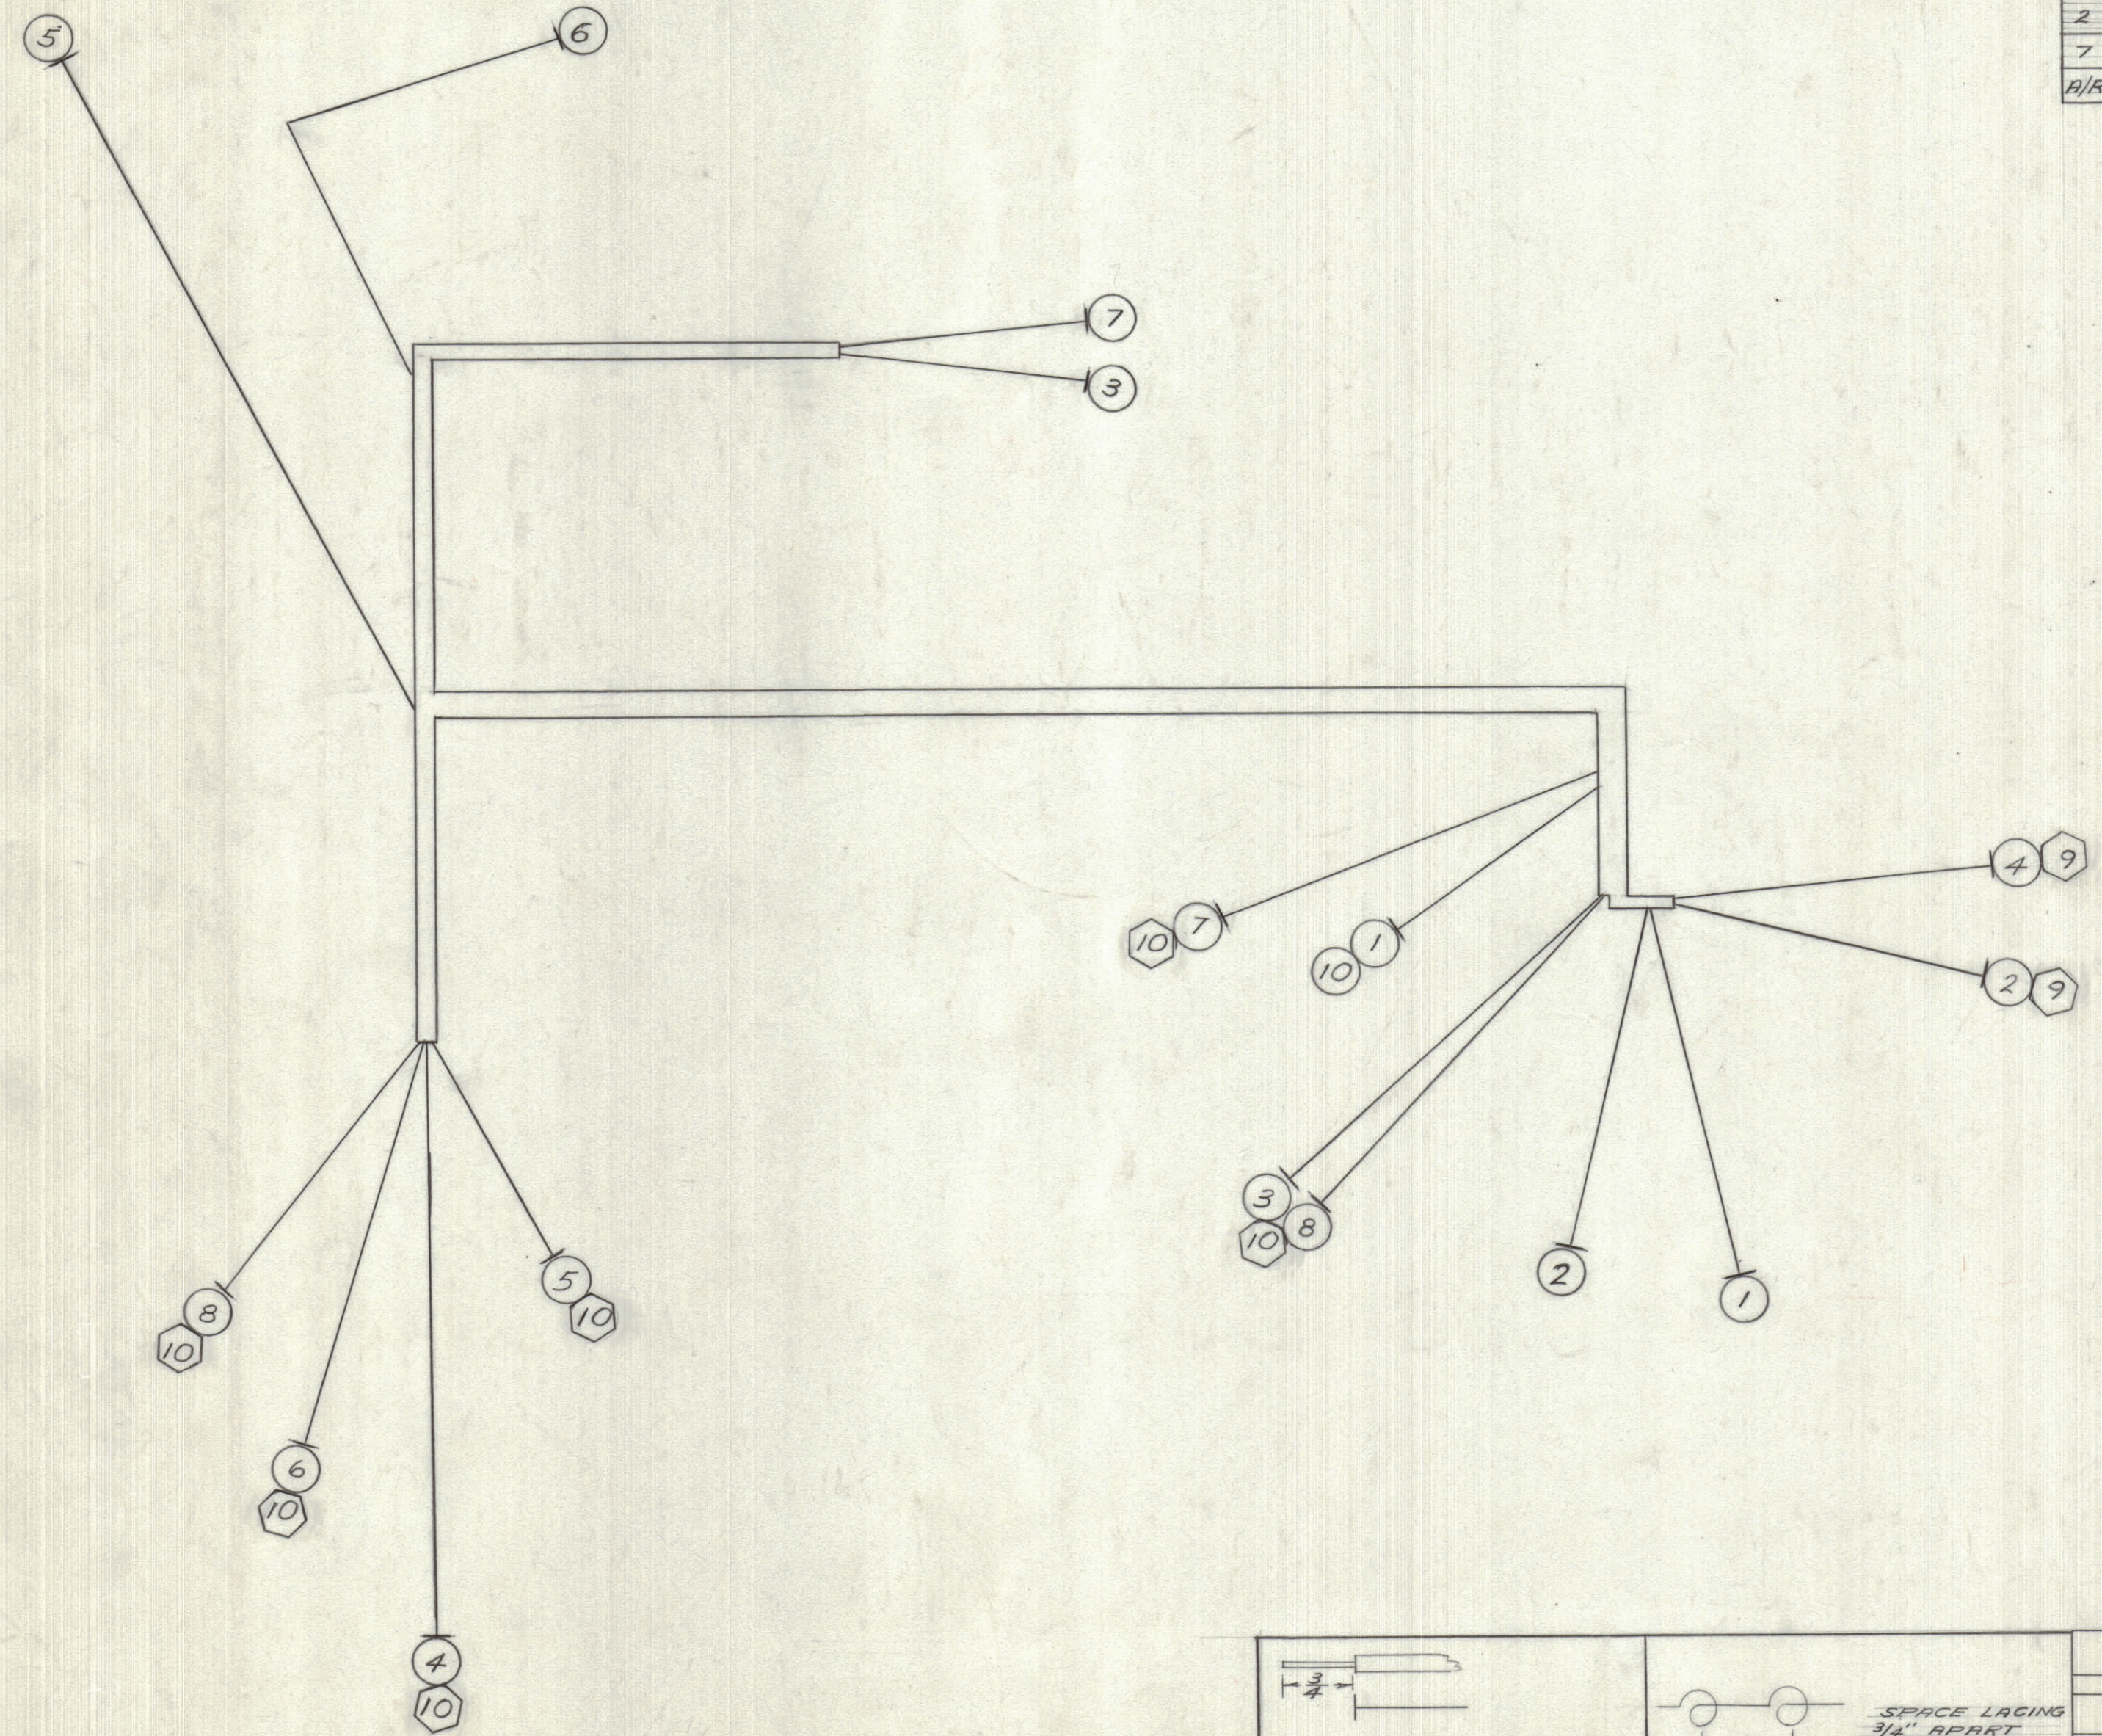

CA10151 0

TOLERANCES		SCALE:
ALL	DEC. DIM. ± 1/8	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
OTHERS	FRAC. DIM. ± 1/16	
	ANGULAR DIM. ±	

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT.

SPACE LACING 3/4" APART

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
		A 10331	25-8-64

USED ON

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE FOR "ON AIR INDICATOR"	
WEIGHT PER FC.		RD	
TYPE & TEMPER.		DRAWN: [Signature] ELEC. DES. APP. MECH. DES. APP.	
HEAT TREAT. SPEC.		CHECKED: [Signature] FINAL APPROVAL	
FINISH & SPEC. NO.		CA10151 0	