


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.

ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
21 <sup>1</sup> / <sub>8</sub> "	1	LWC 26(7)U0	WIRE, ELECTRICAL, INSULATION	
18 <sup>3</sup> / <sub>4</sub> "	2	LWC 26(7)U1		
20"	3	LWC 26(7)U2		
17"	4	LWC 26(7)U3		
18 <sup>1</sup> / <sub>2</sub> "	5	LWC 26(7)U4		
15 <sup>1</sup> / <sub>4</sub> "	6	LWC 26(7)U5		
15 <sup>7</sup> / <sub>8</sub> "	7	LWC 26(7)U6		
14 <sup>1</sup> / <sub>2</sub> "	8	LWC 26(7)U7		
14 <sup>3</sup> / <sub>4</sub> "	9	LWC 26(7)U8		
13"	10	LWC 26(7)U9		
14 <sup>3</sup> / <sub>4</sub> "	11	LWC 26(7)U90		
11 <sup>3</sup> / <sub>4</sub> "	12	LWC 26(7)U91		
13"	13	LWC 26(7)U92		
10 <sup>1</sup> / <sub>4</sub> "	14	LWC 26(7)U93		
11 <sup>1</sup> / <sub>2</sub> "	15	LWC 26(7)U94		
9 <sup>1</sup> / <sub>4</sub> "	16	LWC 26(7)U95	WIRE, ELECTRICAL, INSULATION	
AR	17	CD101-1MW	CORD, LACING	
1	18	EY102-5	GROMMET, RUBBER	
1	19	PX100-9-208	SLEEVING, MARKED, CA10429 C/W LATEST REVISION LETTER	

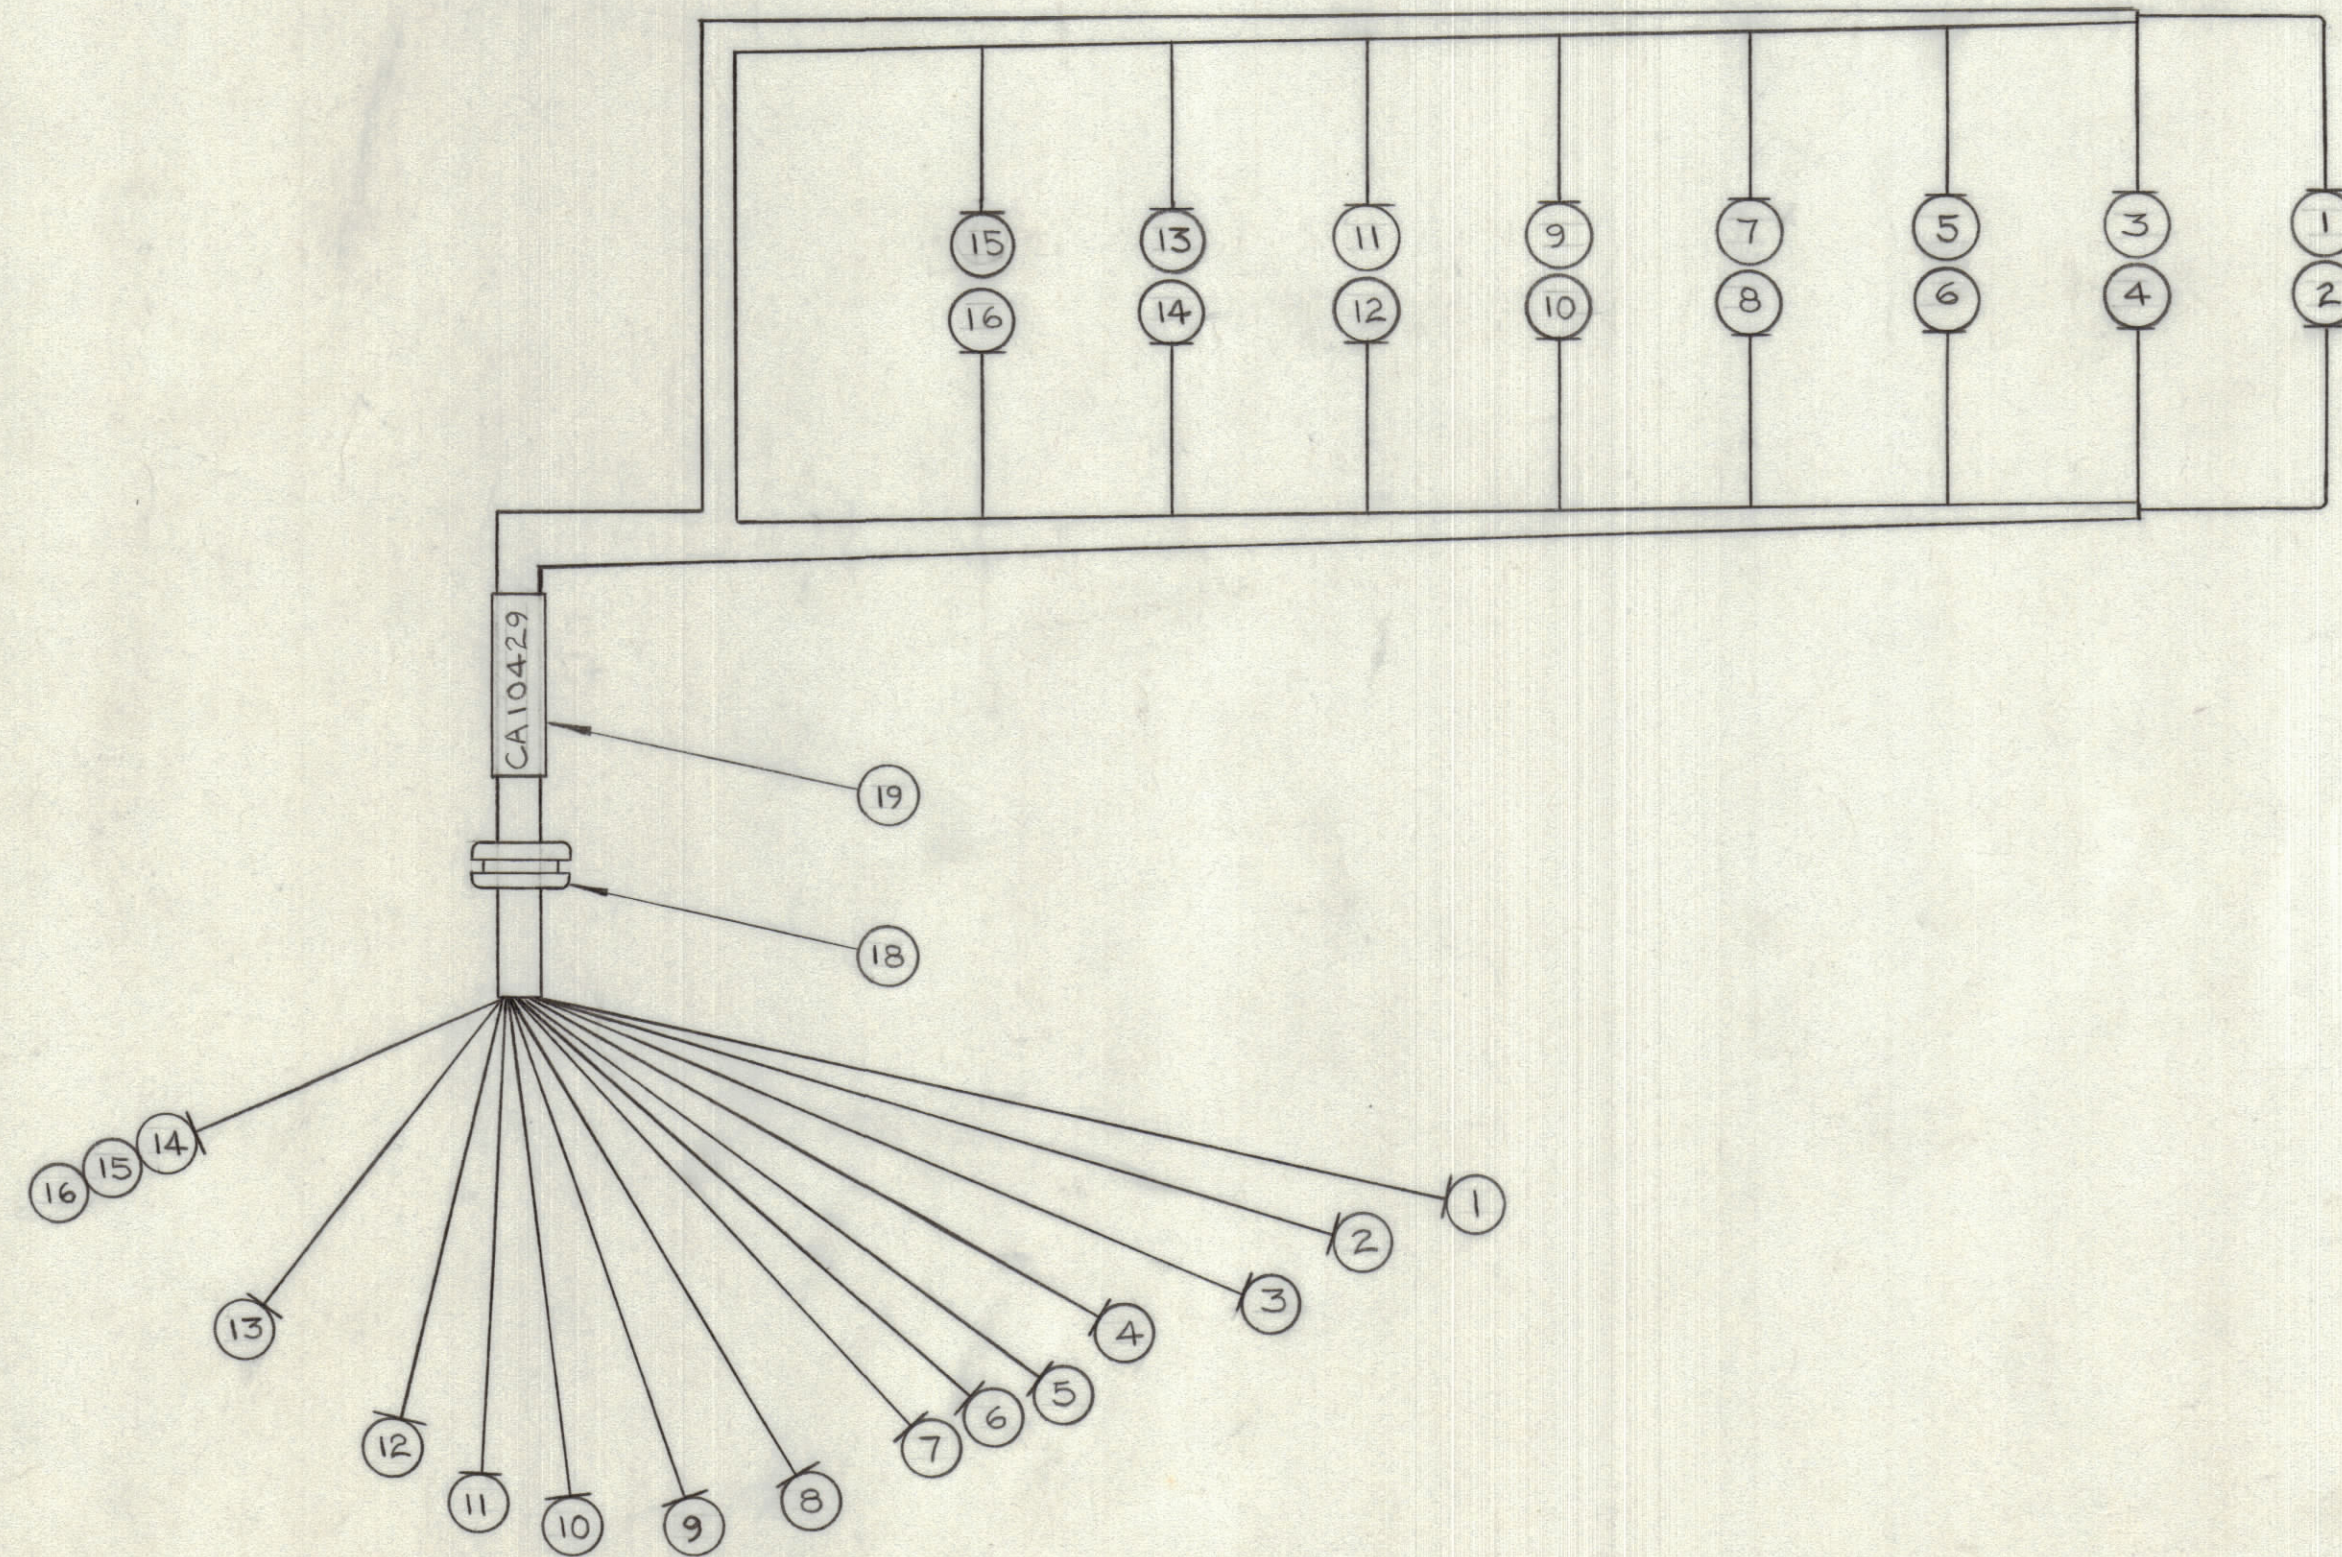

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

CA10429 Ø

UNLESS OTHERWISE SPECIFIED  
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

TOLERANCES

ALL OTHERS	DEC. DIM. ±	SCALE: 1:1
	FRAC. DIM. ± 1/8	DRILL, PUNCH, COMMERCIAL STOCK
	ANGULAR DIM. ±	SIZES AND MANUFACTURERS
		TOLERANCES ARE NOT INCLUDED.

AMC 20-16	020/66	A10375	DEC. 12/66
MODEL	PROJECT NO.	ASS'Y. NO.	DATE

USED ON

STOCK SIZE		TMC (Canada) LIMITED	
		OTTAWA	ONTARIO
MATERIAL		CABLE, METER	
WEIGHT PER PC.			
TYPE & TEMPER		RL	BCB
		DRAWN	ELEC. DES. APP.
		MECH. DES. APP.	
HEAT TREAT. SPEC.		gpc	RD
		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10429 Ø	