
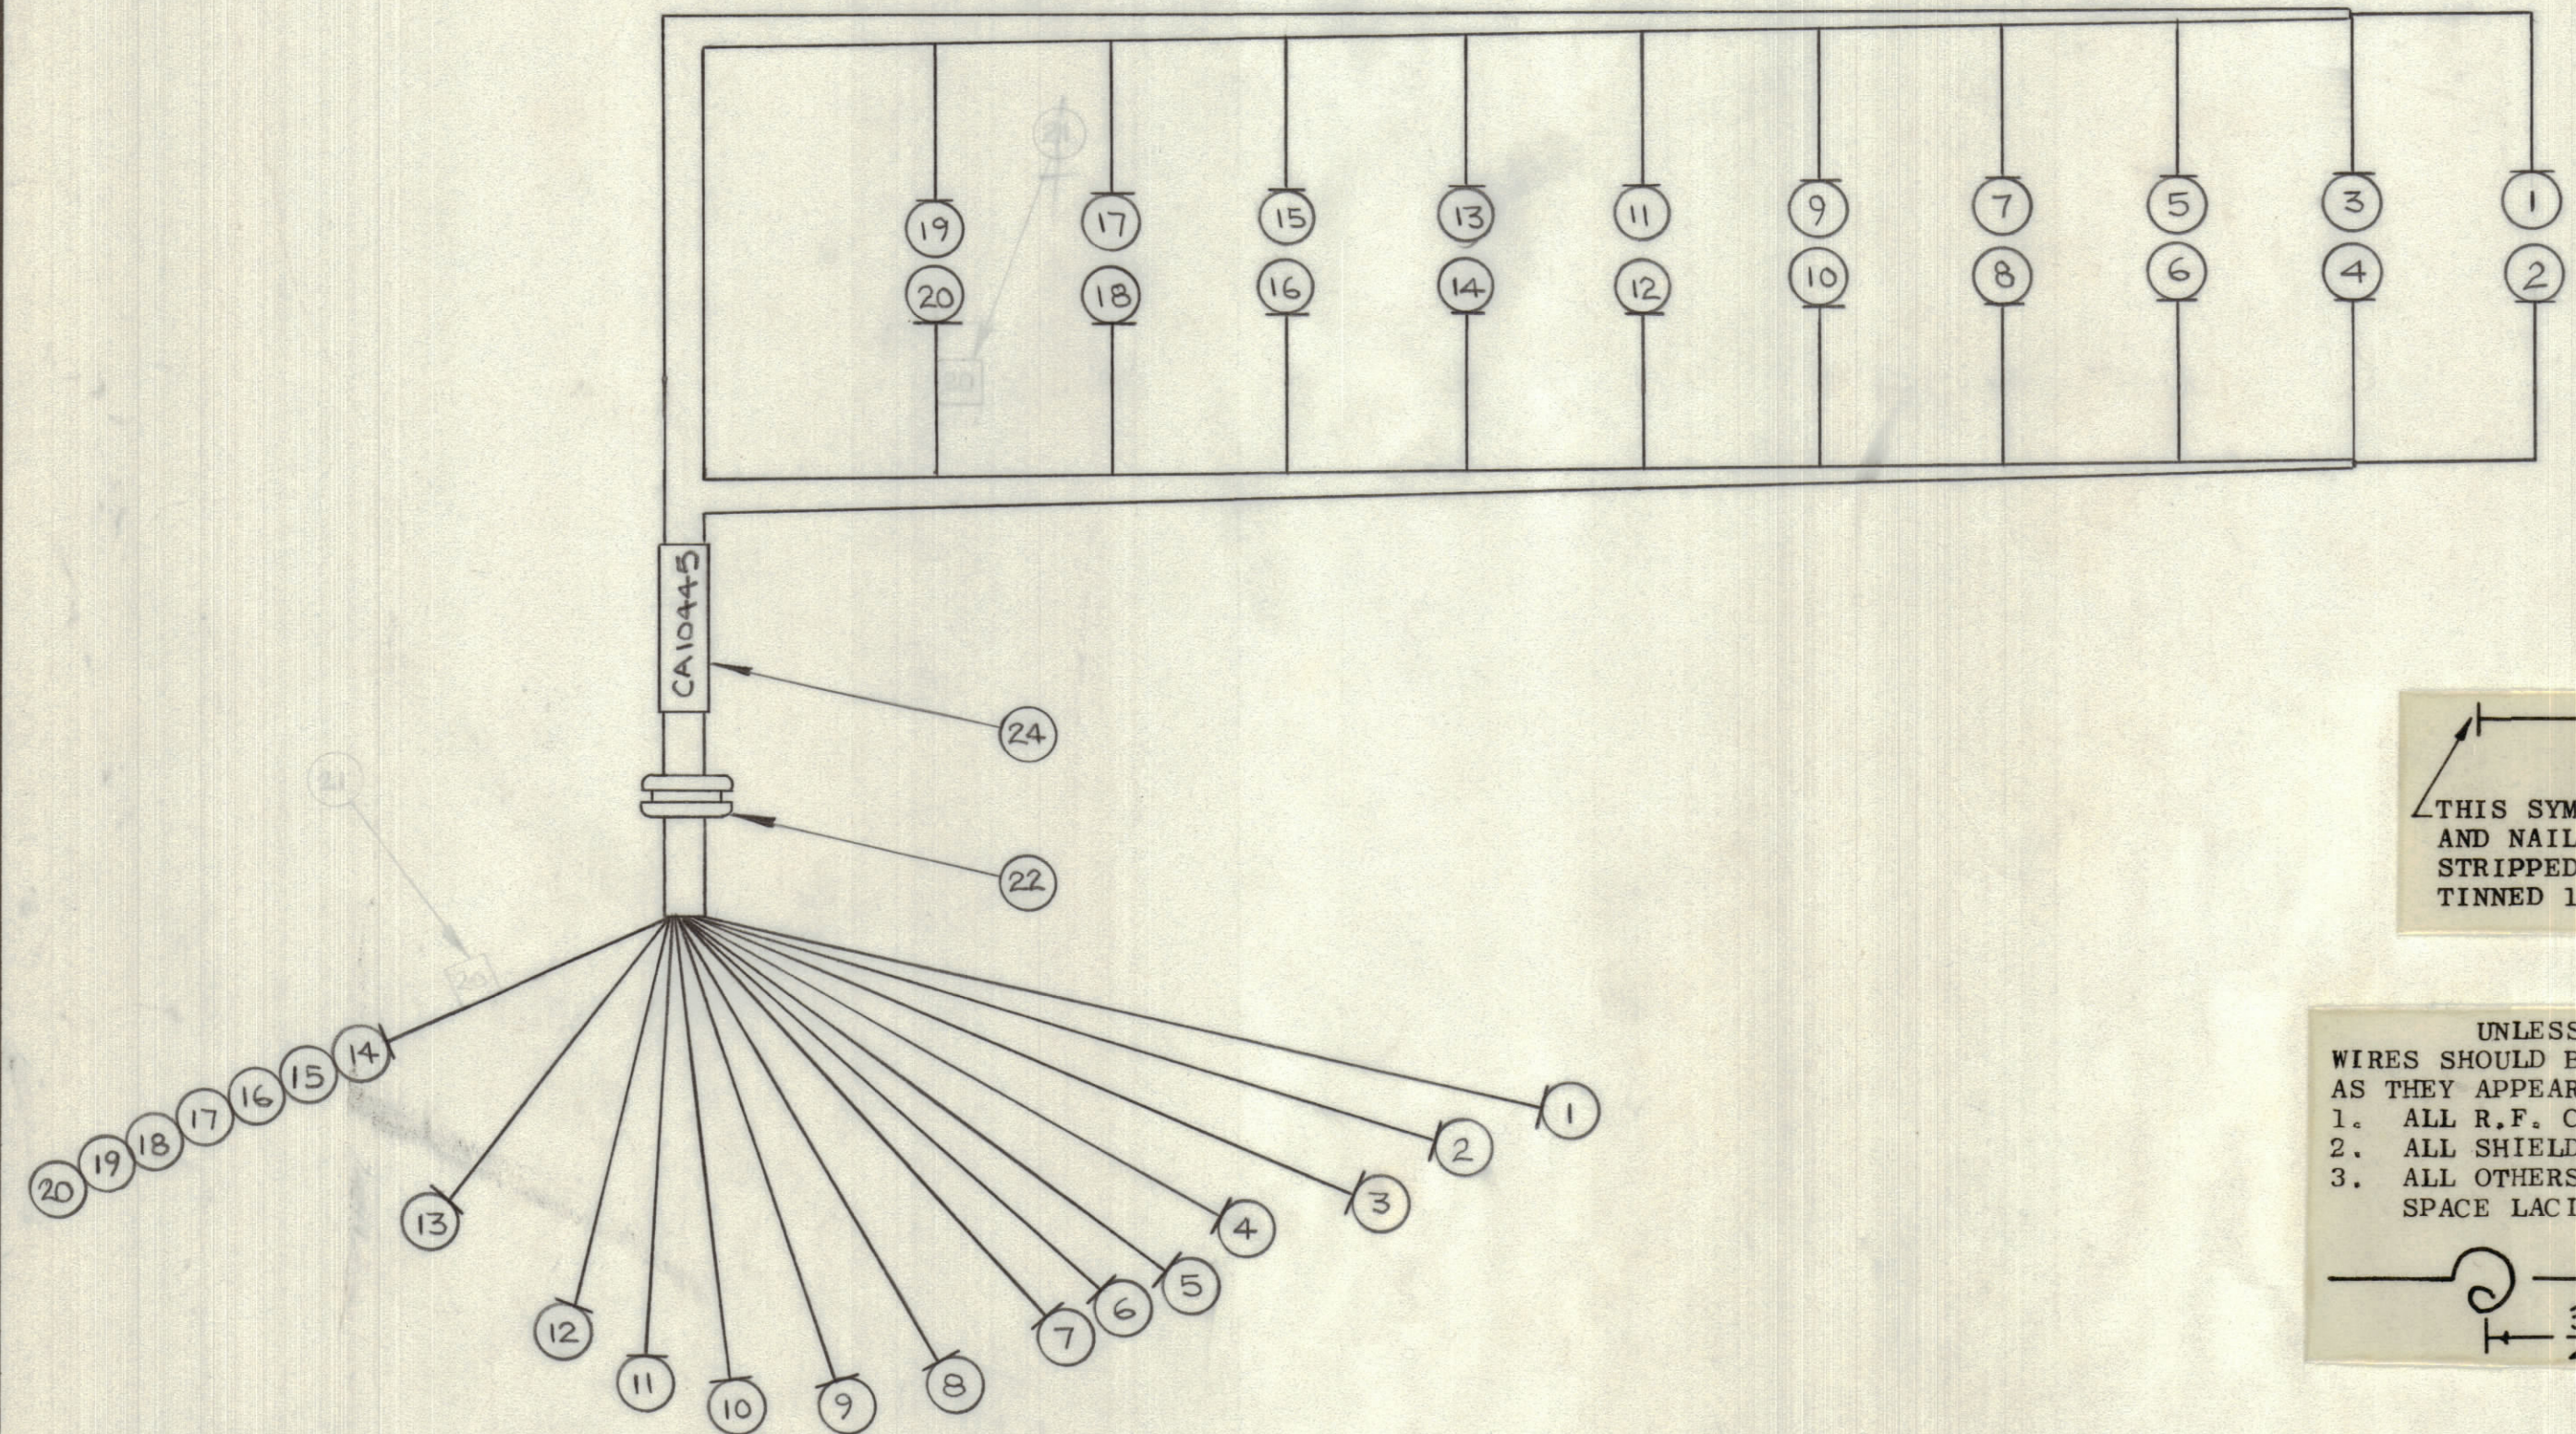


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
0		RELEASED FOR PROD.	MARCH 1/66		RPL		


REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
1	LWC26(7)U0		WIRE, ELECTRICAL INSULATED	
2		U1		
3		U2		
4		U3		
5		U4		
6		U5		
7		U6		
8		U7		
9		U8		
10		U9		
11		U90		
12		U91		
13		U92		
14		U93		
15		U94		
16		U95		
17		U96		
18		U97		
19		U98		
20	LWC26(7)U0		WIRE, ELECTRICAL INSULATED	
21	CD101-1-MW		CORD, LACING	
22	EY102-5		GROMMET, RUBBER	
AR	BS-100-MW		SOLDER, TIN	
1"	PX100-9-208		SLEEVING, MARKED CA10445 C/W LATEST REVISION LETTER	



CA10445  $\emptyset$

  
THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.  
 1. ALL R.F. CABLES  
 2. ALL SHIELDED CABLES  
 3. ALL OTHERS  
 SPACE LACING APPROXIMATELY 3/4" APART.

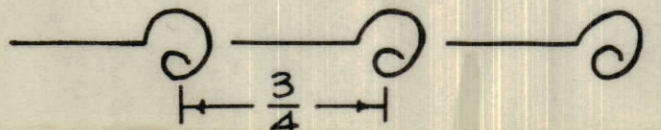

TOLERANCES	SCALE: 1:1
ALL OTHERS DEC. DIM. $\pm$ FRAG. DIM. $\pm 1/8$ ANGULAR DIM. $\pm$	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AMC 20-20	039/66	FEB 25/66
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE, METER	
TYPE & TEMPER	RPL DRAWN	MECH. DES. APP.	
HEAT TREAT. SPEC.	Checked	ENG. APPROVAL	
FINISH & SPEC. NO.			CA10445 $\emptyset$