


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	5-7-66		RD		
A	3	WAS MWC18(16)U1	16-8-66		RD		

BKOUT (FROM) COMPONENT	BKOUT (TO) COMPONENT	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
E	TB102-32	A	F103 S	1	MWC18(16)U1	WIRE, ELECTRICAL INSULATED
E	TB102-33	A	I103 B	2	U4	
A	I103 A	B	I104 B	3	U4	
E	TB102-34	C	F101 L	4	U5	
E	TB102-35	C	S101 L	5	U0	
E	TB102-36	B	F104 S	6	U1	
E	TB102-37	D	F102 L	7	U5	
E	TB102-38	D	S102 L	8	U0	
E	TB102-39	A	F103 L	9	U3	
A	F103 L	A	I103 A	10	U3	
E	TB102-40	B	F104 L	11	U7	
B	F104 L	B	I104 B	12	U7	
E	TB102-42	C	S101 S	13	U2	
E	TB102-42	D	S102 S	14	U2	
E	TB102-43	C	S101 S	15	U2	
E	TB102-43	D	S102 S	16	U2	
C	F101 S	C	S101 L	17	U0	
D	F102 S	D	S102 L	18	U0	
E	TB102-20	D	I102 A	19	U6	
E	TB102-27	D	I102 B	20	U7	
E	TB102-6	C	I101 A	21	U6	
E	TB102-29	C	I101 B	22	MWC18(16)U7	WIRE, ELECTRICAL INSULATED
				23	CD101-1-MW	CORD, NYLON LACING
				24	BS100	SOLDER, SOFT


NOTE: S=SUPPLY SIDE, L = LOAD SIDE

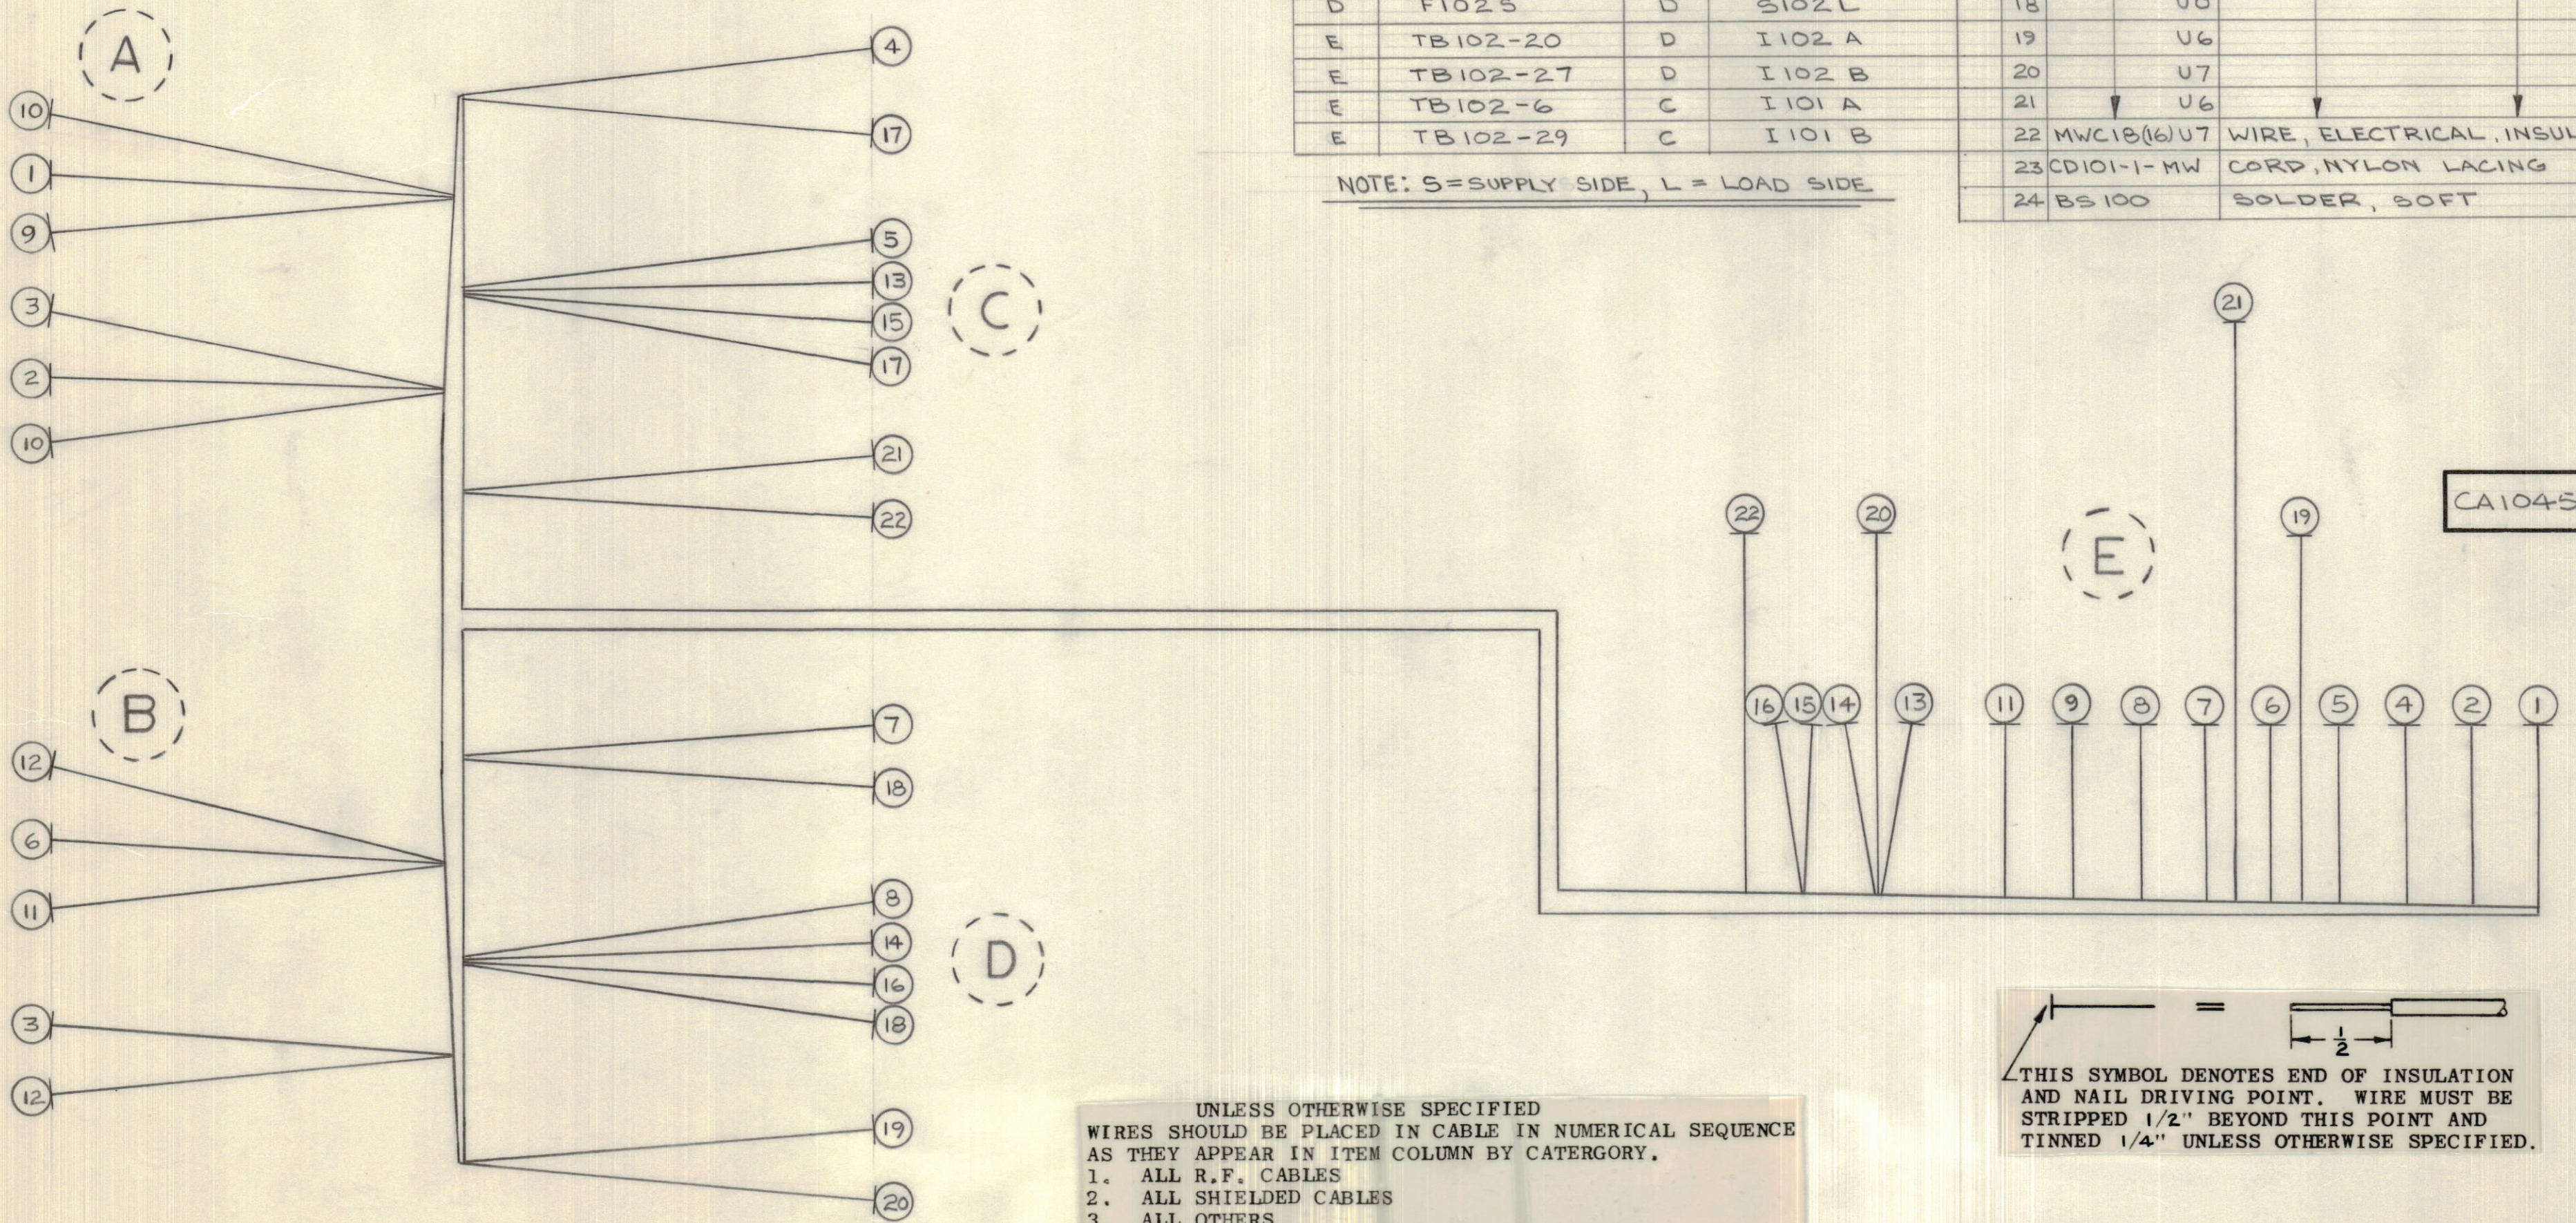

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.



THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

CA10459 A

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± 1/8 FRAC. DIM. ± 1/8 ANGULAR DIM. ±	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AX10025	050/66	JULY 4/66
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE, HARNESS MAIN	
WEIGHT PER FC.			
TYPE & TEMPER		RPL	
		DRAWN	ELEC. DES. APP.
		CHECKED	MECH. DES. APP.
HEAT TREAT. SPEC.		FINAL APPROVAL	
		LANGER	CA10459 A
FINISH & SPEC. NO.			