


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD.	JUN 12/68		RPL	W	W

BKOUT (FROM) COMPONENT	BKOUT (TO) COMPONENT	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
D TB2	A T1, 12V	20 1/2"	1	MWC18(7)U98	WIRE, ELECTRICAL INSULATED	
D TB2	A T1, 12V	19 1/2"	2	MWC18(7)U98	WIRE, ELECTRICAL INSULATED	
C TBI-7	A T1, 115V	9 1/2"	3	CA10520-2	CABLE, AC	
C TBI-8	A T1, 0V					
C TBI-5	B T2, 18V	8 1/2"	5	MWC20(7)U8	WIRE, ELECTRICAL INSULATED	
C TBI-2	B T2, 12V	9"	6	MWC22(7)U98		
C TBI-1	B T2, 0	10 3/4"	7	MWC22(7)U98		
C TBI-4	B T2, 0	9"	8	MWC20(7)U8	WIRE, ELECTRICAL INSULATED	
C TBI-3	B T2, 115V					
C TBI-6	B T2, 0					
			AR 11	CU142-8	STRAP, CABLE ADJUSTABLE, PLASTIC	
			10 12	TE-120-2	SPADE, LUG.	
			AR 13	BS-100	SOLDER, SOFT	

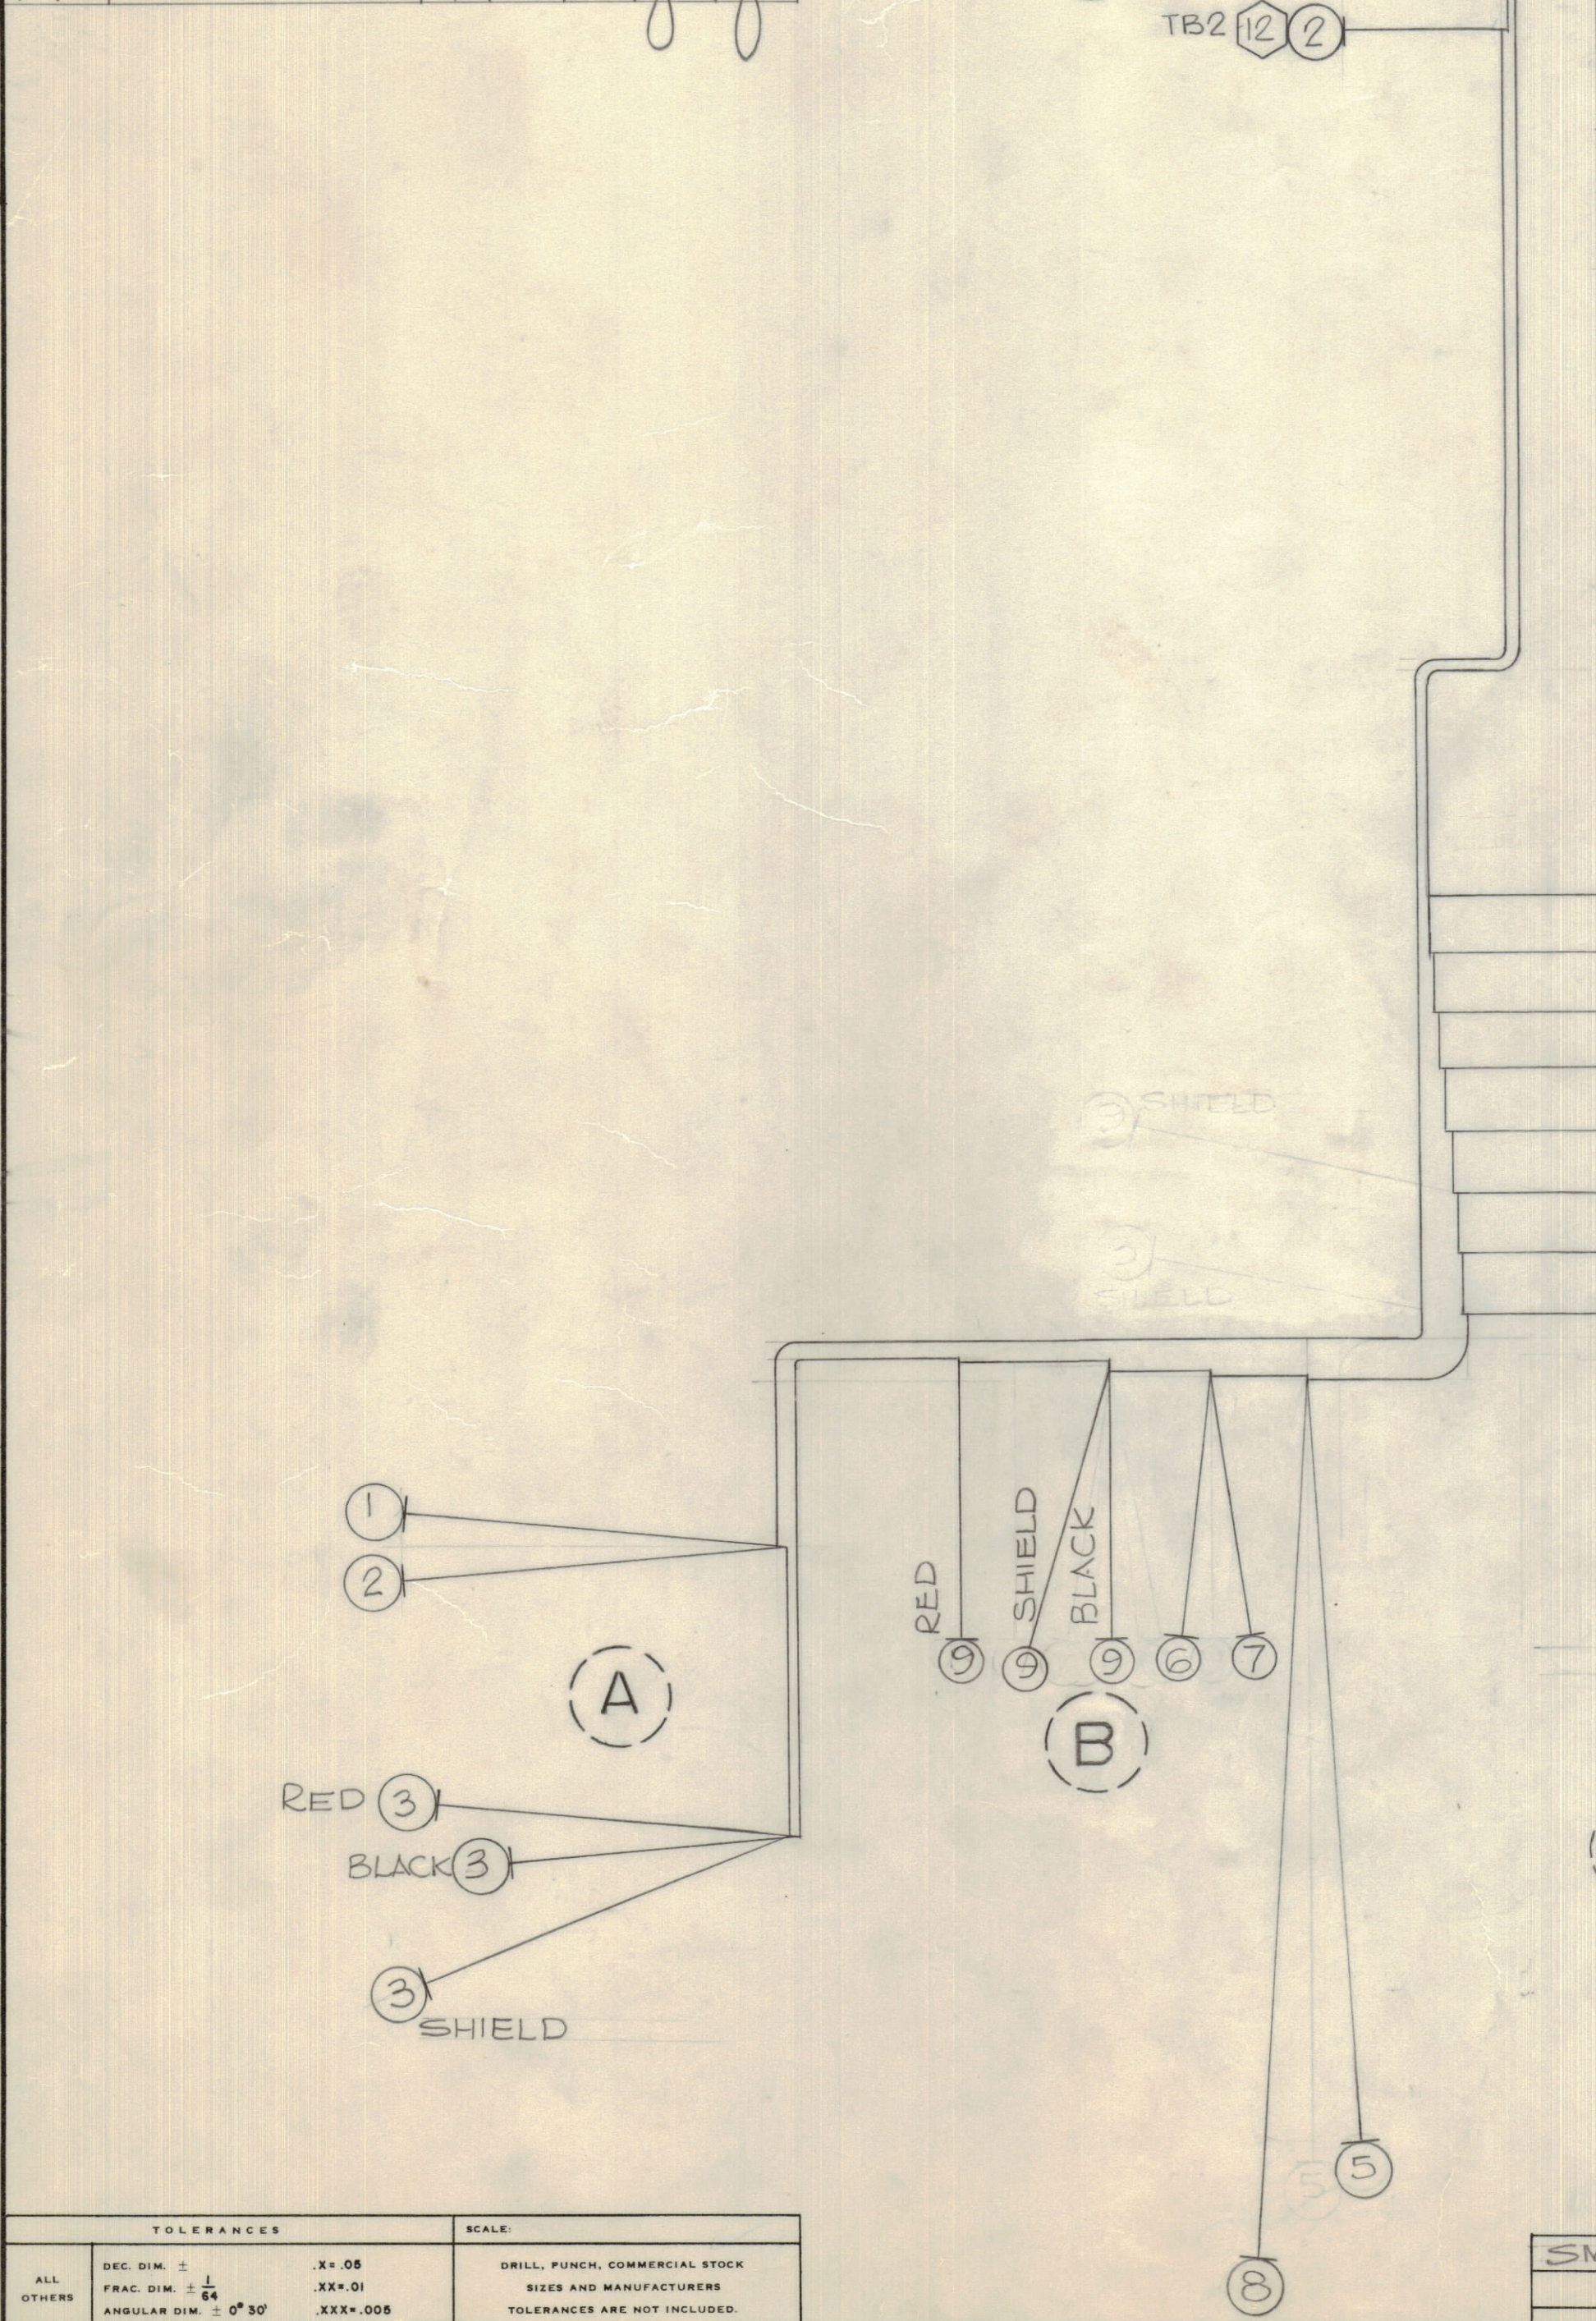

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

CA10509 Ø

TOLERANCES	SCALE:
ALL OTHERS	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
DEC. DIM. ± .X = .05	
FRAC. DIM. ± 1/64 = .XX = .01	
ANGULAR DIM. ± 0° 30' = .XXX = .005	

SMR-5	061/68	8/3/68
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED	
		OTTAWA ONTARIO	
MATERIAL		CABLE, HARNESS BRANCHED	
WEIGHT PER FC.			
TYPE & TEMPER		DRAWN: <i>Southern</i>	
		ELEC. DES. APP. <i>W</i>	
HEAT TREAT. SPEC.		MECH. DES. APP.	
CHECKED		FINAL APPROVAL	
		CA10509 Ø	