


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	JUNE 12/68		RA	JW	JW


REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
	1	MWC24(7)U1	WIRE, ELECTRICAL INSULATED	
	2	MWC24(7)U2		
	3	MWC24(7)U3		
	4	MWC24(7)U4		
	5	MWC24(7)U5		
	6	MWC24(7)U6		
	7	MWC24(7)U7		
	8	MWC24(7)U8	WIRE ELECTRICAL INSULATED	
1"	9	PX100-9-186	INSULATION, SLEEVING ELECT.	
AR	10	CU-142-8	STRAP, CABLE ADJUSTABLE PLASTIC	
AR	11	BS-100	SOLDER, SOFT	

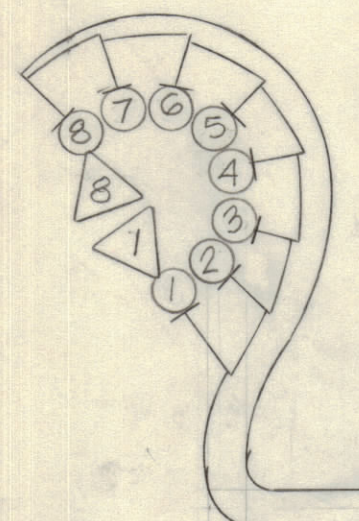

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

SYMBOLS DENOTES:
 ○ ITEM NO'S
 ▽ PIN NO'S

CA10513 Ø

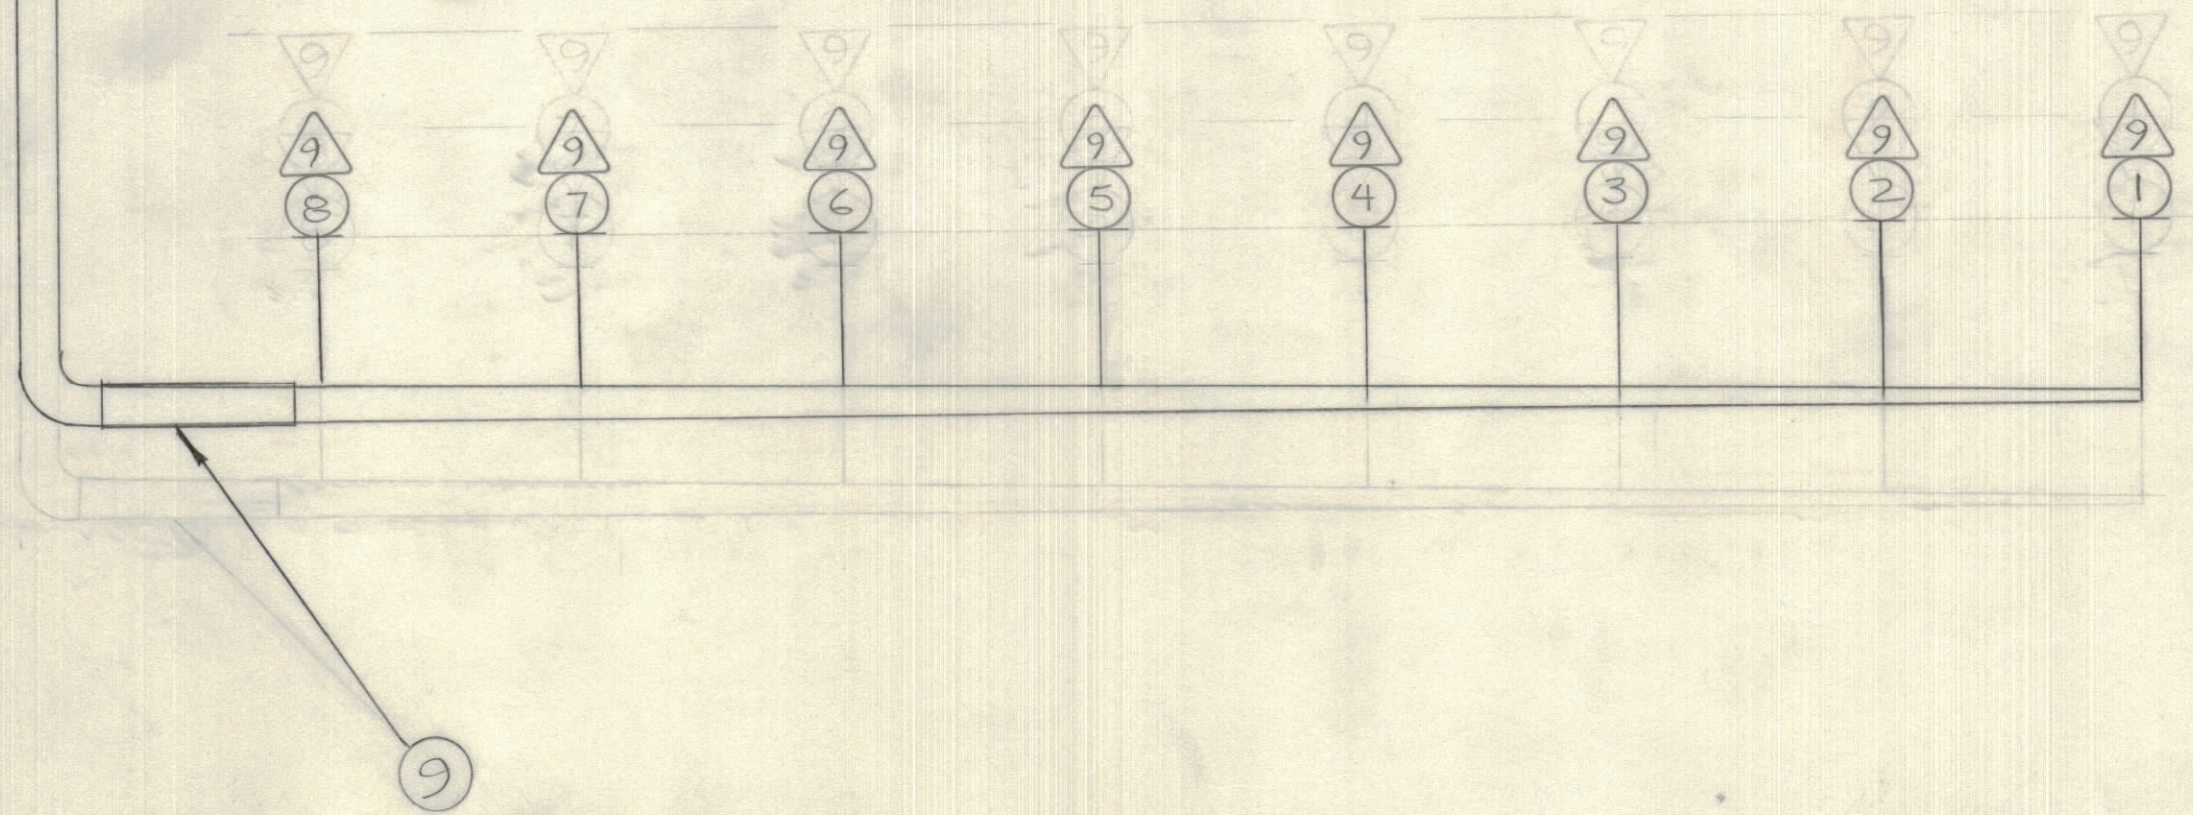

TOLERANCES		SCALE:	1/1
ALL OTHERS	DEC. DIM. ± .X = .08 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.	

SMR-5	061/68		MAR 6/68
MODEL	PROJECT NO.	ASS'Y. NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE ASSEMBLY (12V. CONT)	
WEIGHT PER PC.		DRWN	MECH. DES. APP.
TYPE & TEMPER.		ELEC. DES. APP.	MECH. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10513 Ø	