



IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		PROD RELEASE	18 MAR 71		NAT.		
A		REV PER CEMN	10 JUN 71	1086	NAT.	A.F.P.	
B		REV PER CEMN	NOV 93 71	1094	AFP	43	

REQ	ITEM	PART NO.	DESCRIPTION	USED ON	REMARKS
1	1	CA10634	CORD SET, ALPHA (6 FT)	CA10528	
	2				
	3				
	4	MS3057-6	CLAMP, CABLE	CA10528	
	5	MS3106A-14S-2S	PLUG, STRAIGHT	CA10528	
	6	MS3420-6A	BUSHING, RUBBER	CA10528	

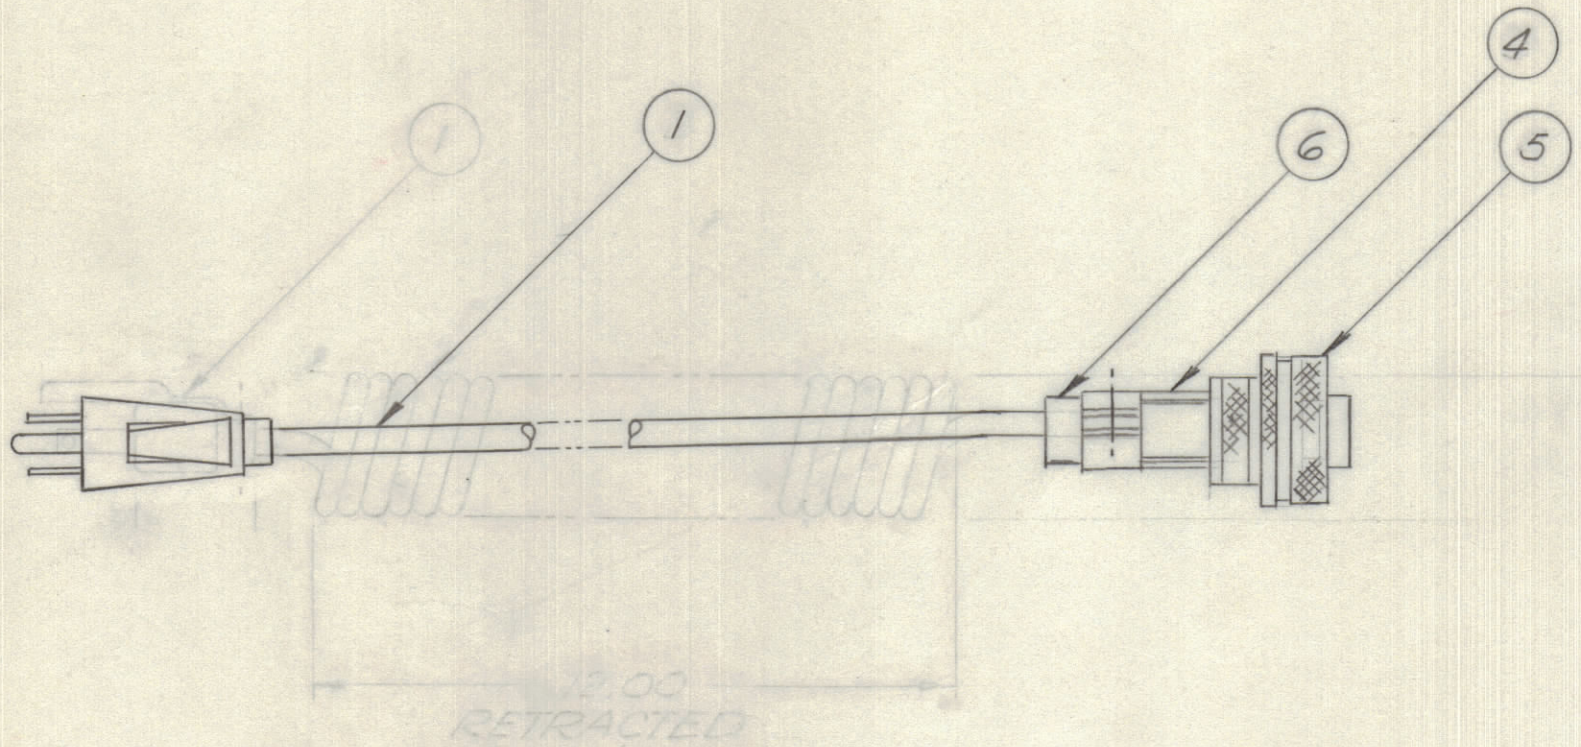

CA10528 B

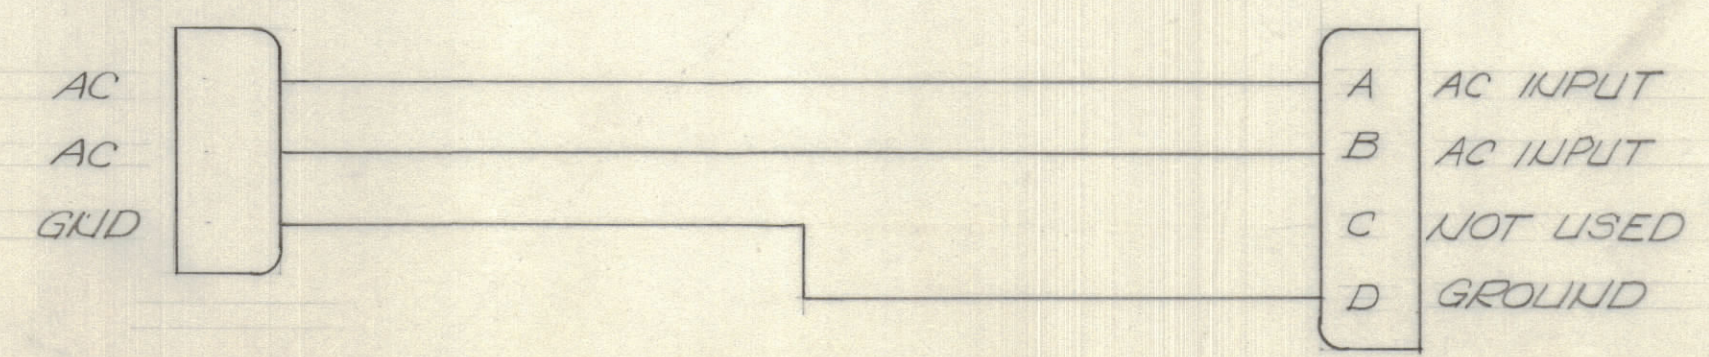

SCHEMATIC

TOLERANCES		SCALE: <i>U.T.S.</i>
ALL OTHERS	DEC. DIM. ± .XX*.01 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0°30'	.X*.08 .XX*.01 .XXX*.008
DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.		

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
LP10016			18 MAR 71
USED ON			

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE ASSEMBLY POWER	
TYPE & TEMPER		THOMAS	
HEAT TREAT. SPEC.		M. POUNE	
FINISH & SPEC. NO.		CA10528	B