


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.					DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL TO PROD	DEC 18/64		AP		
A		REV AS PER CEMN	MAY 1970	776	AL	DL	

BREAK OUT	FROM COMPONENT	BREAK OUT	TO COMPONENT	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
					1	MWC20(7)U98	WIRE ELECTRICAL INSUL	
					2	MWC20(7)U98		
					3	MWC20(7)U8		
					4	MWC20(7)U8		
					5	MWC20(7)U8		
					6	MWC20(7)U8		
					7	MWC20(7)U98		
					8	MWC20(7)U98	WIRE ELECTRICAL INSUL	
					9	EY10?-2	GROMMET	
					14	CU14?-8	STRAP, CABLE	
					1"	PX100-9-166	SLEEVING MARKED CA 10533 C/W LATEST REVISION LETTER	

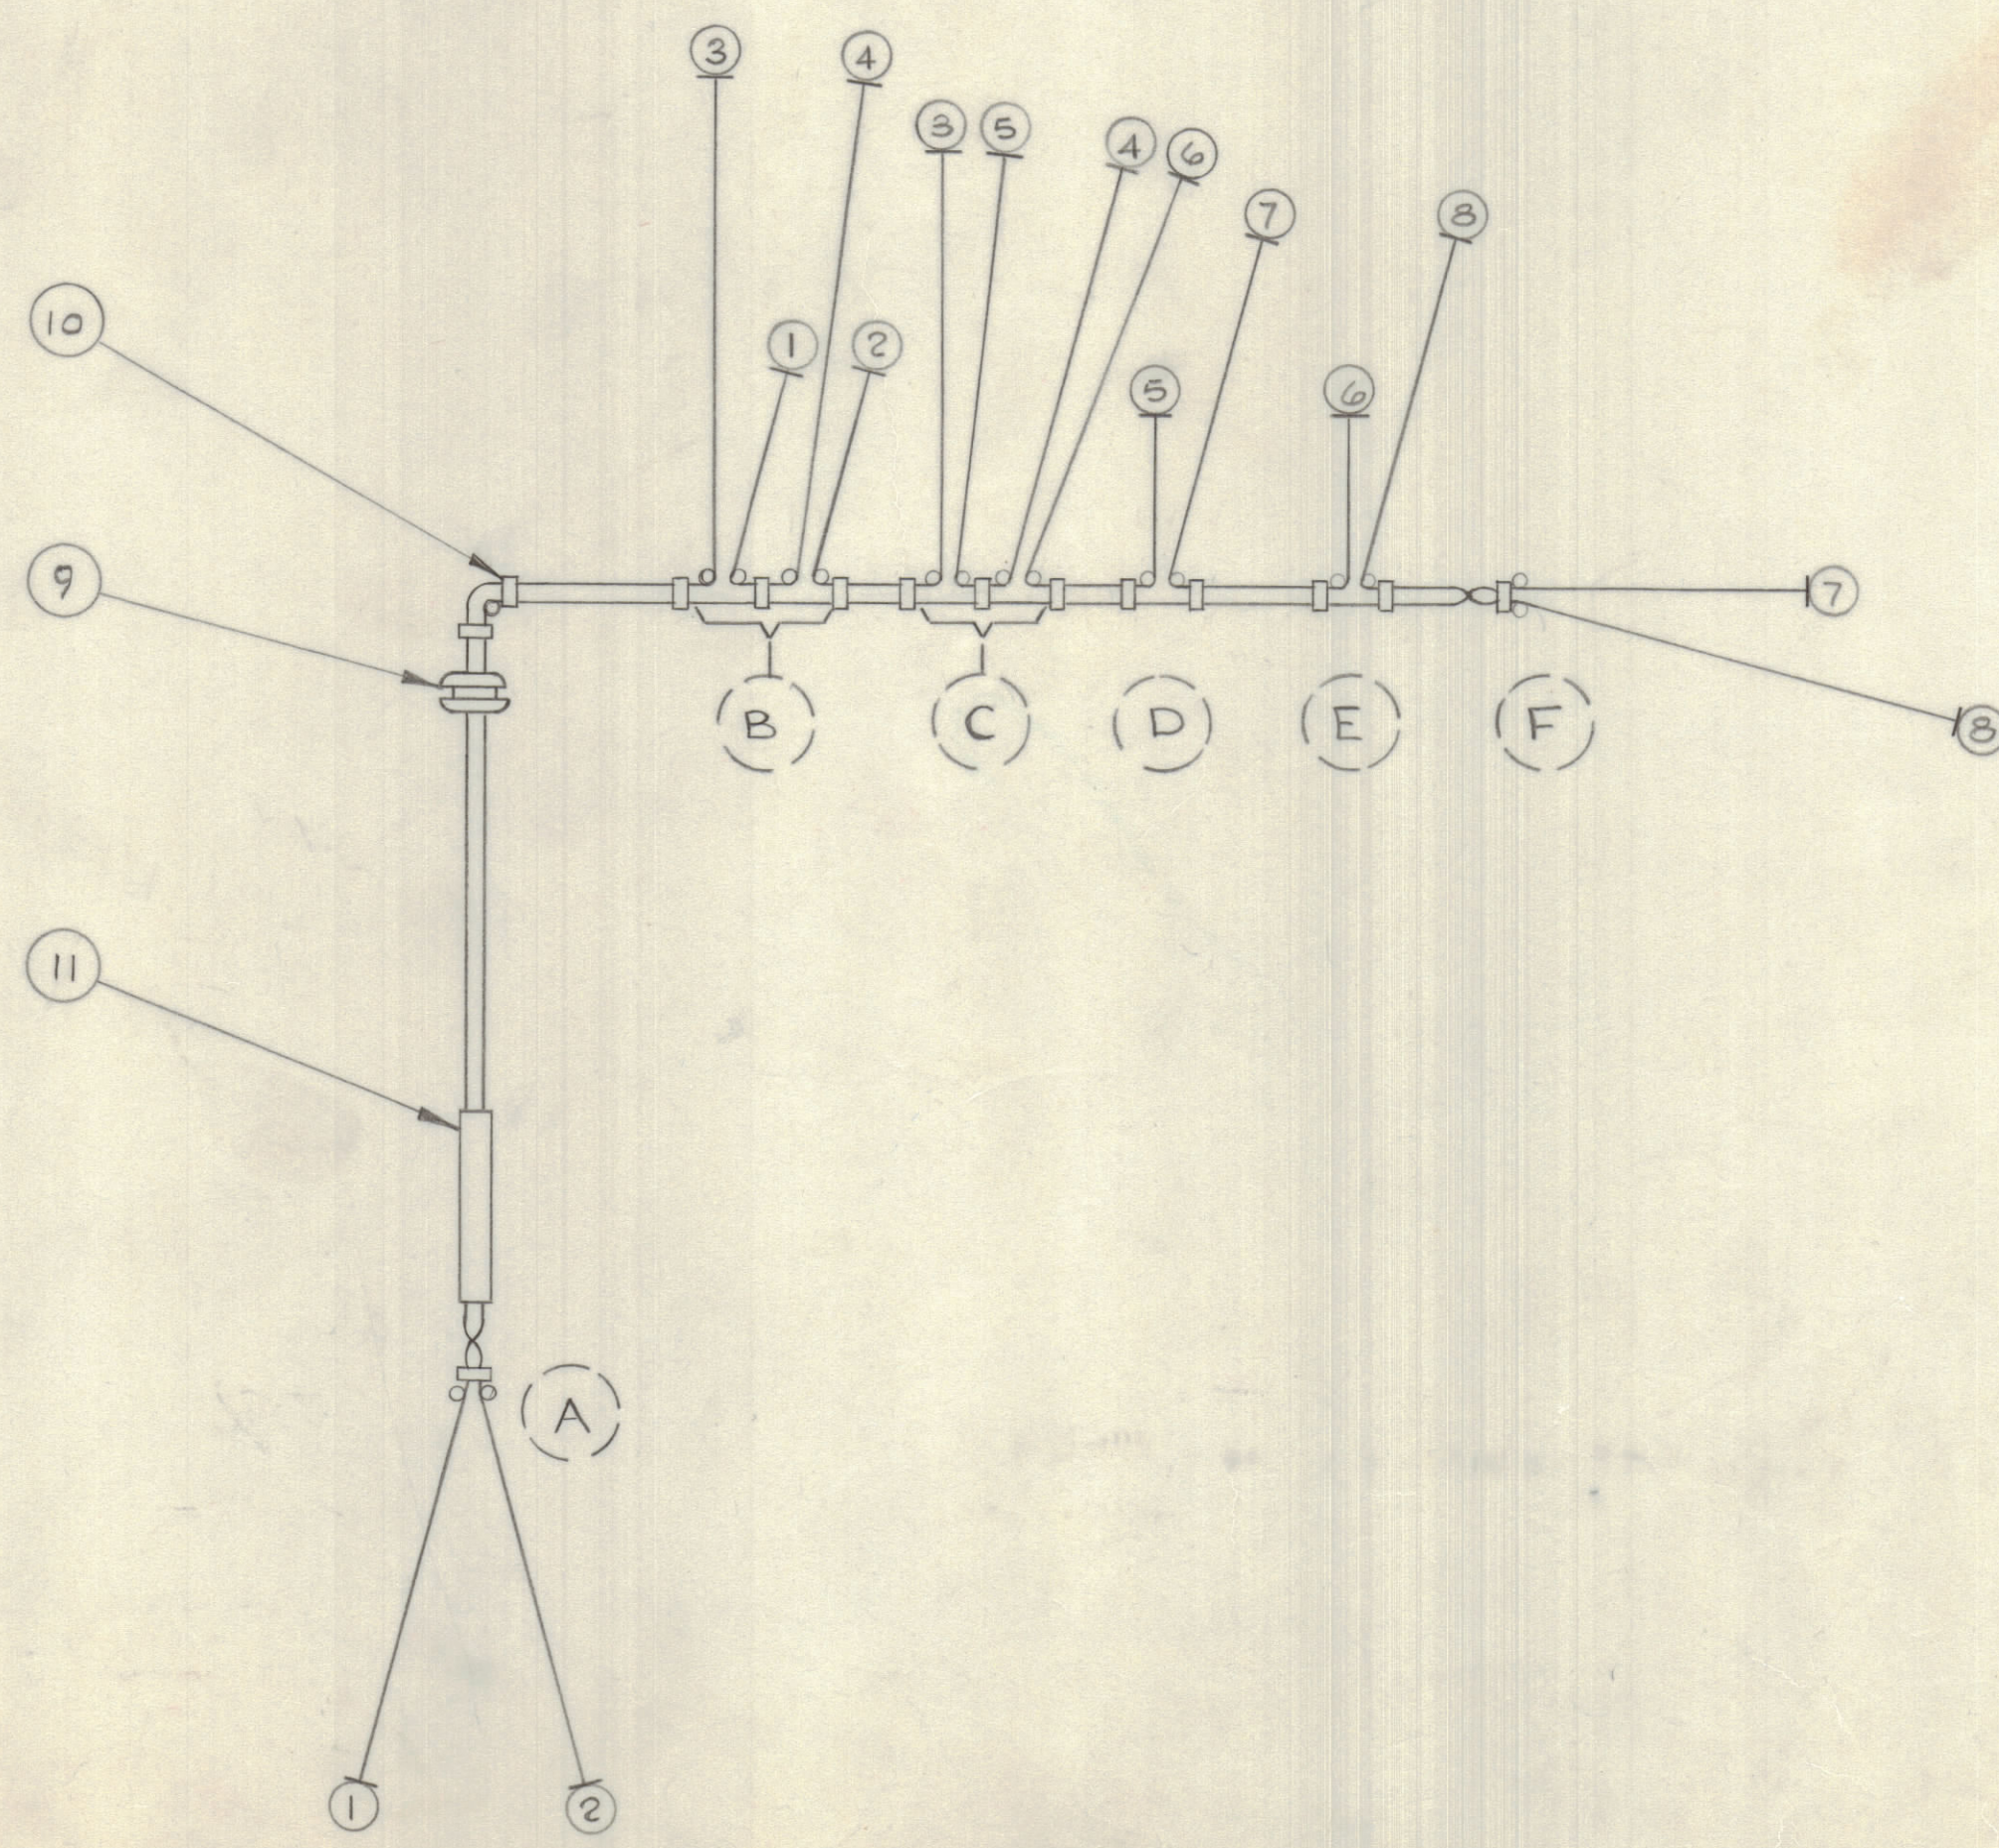

CA10533 A

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

SYMBOL	DENOTES
○	ITEM
○	BREAK OUT

TOLERANCES		SCALE: 1/1
ALL DIM.	± .05	DRILL, PUNCH, COMMERCIAL STOCK
FRAC. DIM.	± .01	SIZES AND MANUFACTURERS
ANGULAR DIM.	± 0° 30'	TOLERANCES ARE NOT INCLUDED.

MODEL	PROJECT NO.	ASS'Y. NO.	DATE
AMC 8 LMC 8 50 & 75-Ω		AX/0073	10 DEC 68

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		WIRING HARNESS BRANCHED	
WEIGHT PER PC.		SMPS	
TYPE & TEMPER.		DRAWN	ELEC. DES. APP.
HEAT TREAT. SPEC.		CHECKED	MECH. DES. APP.
FINISH & SPEC. NO.		FINAL APPROVAL	
		CA10533 A	