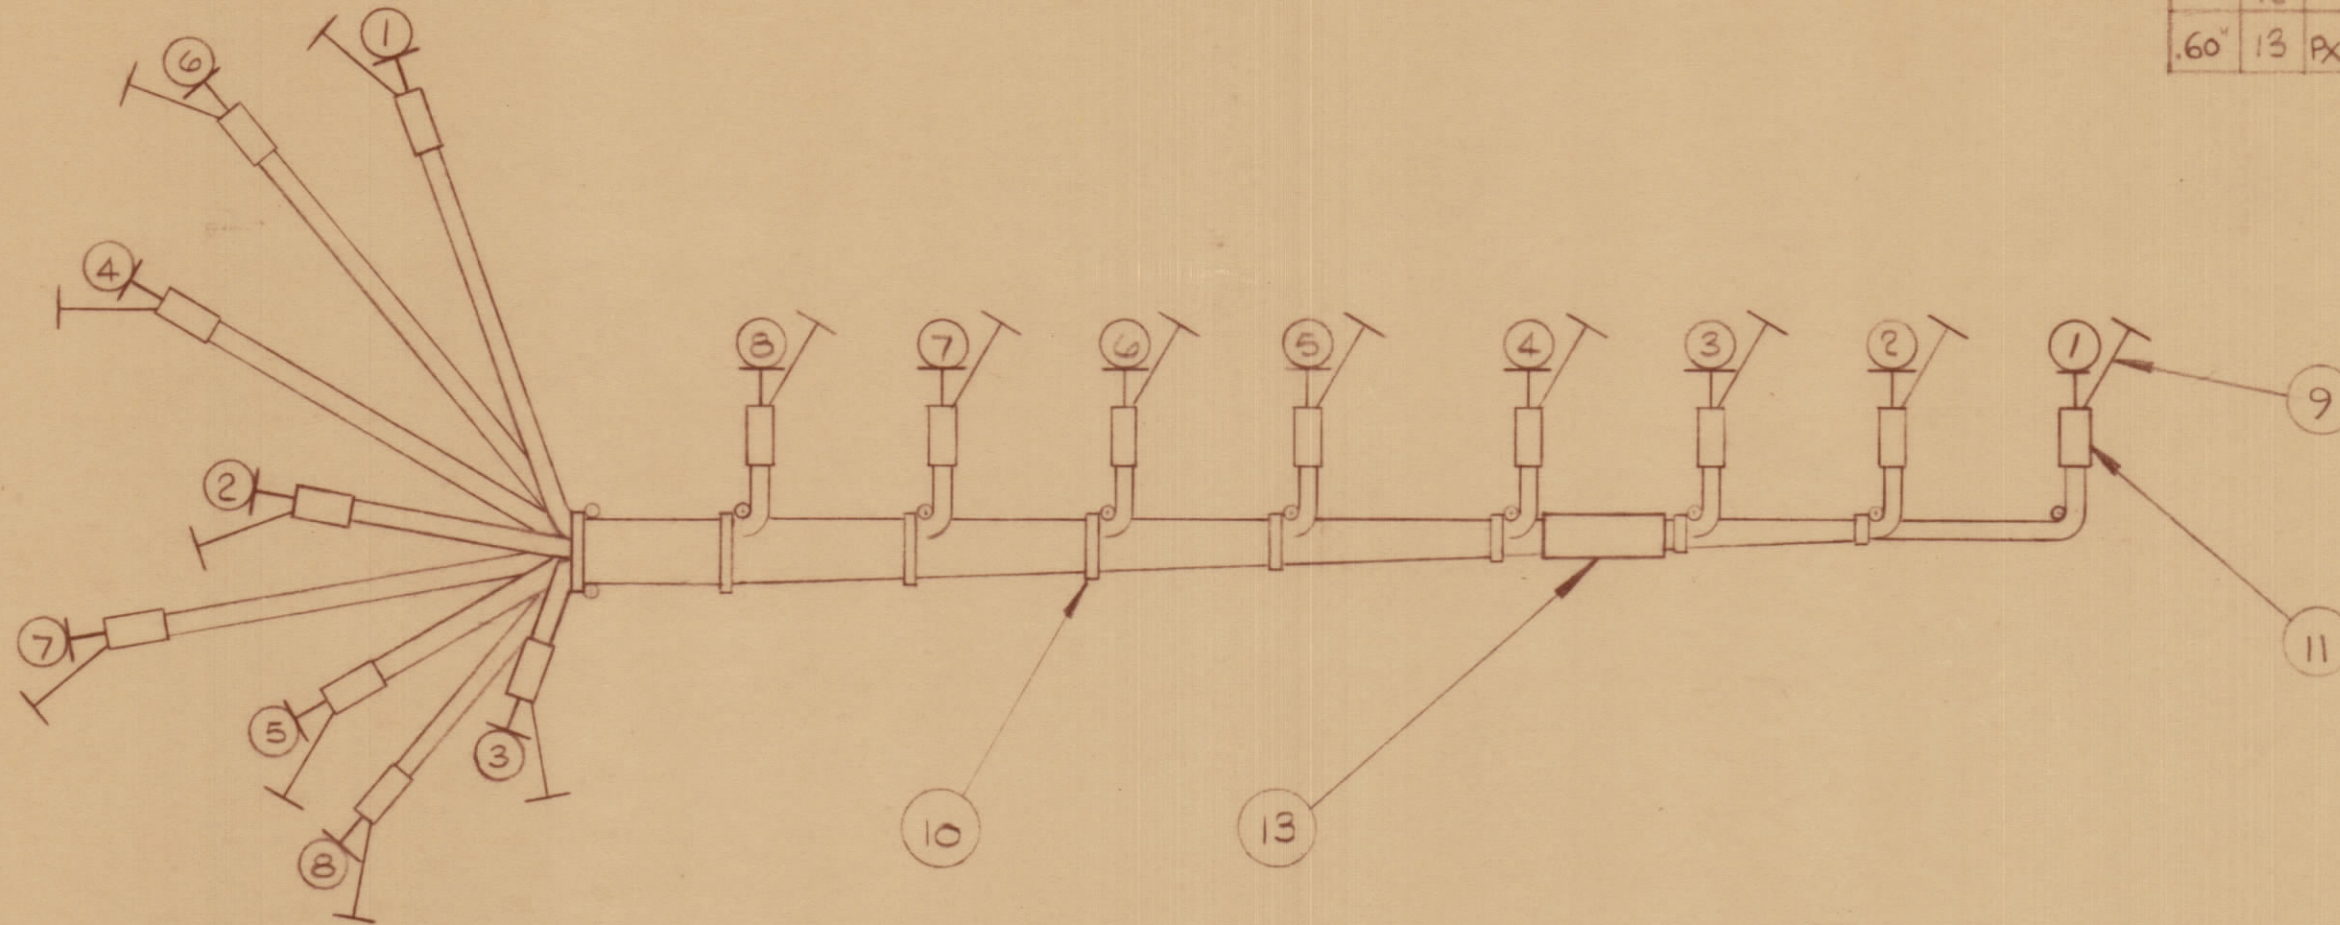


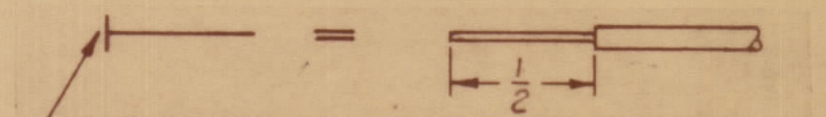
IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES		OTHERWISE SPECIFIED					
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X2		REDESIGNED	22 FEB 69			B	
X3		REV AS PER MARK-UP PRINT.	4 MAR 69			AP B	

PX 100-7-263 WAS 294

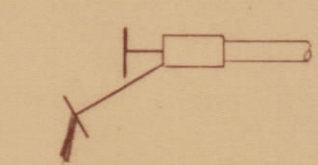
FROM	TO	REQ	ITEM	PART NO.	DESCRIPTION	SYMBOL
A5, PIN 1	J10		1	RG-174/U	CABLE RF COAXIAL	
A5, PIN 2	J11		2			
A5, PIN 3	J12		3			
A5, PIN 4	J13		4			
A5, PIN 5	J14		5			
A5, PIN 6	J15		6			
A5, PIN 7	J16		7			
A5, PIN 8	J17		8	RG-174/U	CABLE RF COAXIAL	
		16"	9	WL100-6	WIRE BUSS	
		8	10	CU142-8	STRAP CABLE	
		16	11	CU10018-1	FERRULE	
			12			
		.60"	13	PX100-9-263	SLEEVING MARKED CA10536 C/W LATEST REV LETTER	



CA10536 X3

  
 THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

○ DENOTES ITEM

  
 THE ABOVE SYMBOL DENOTES SHIELD TERMINATION WITH CUTTING LENGTH OF JUMPER INDICATED

1 ASSEMBLE HARNESS, COMMENCING WITH WIRE 8 THROUGH TO WIRE 1  
 NOTES

TOLERANCES		SCALE: 1:1
ALL	DEC DIM ± .05	DRILL, PUNCH, COMMERCIAL STOCK
OTHERS	FRAC DIM ± 1/64 .XX*.01	SIZES AND MANUFACTURERS
	ANGULAR DIM ± 0° 30' .XXX*.005	TOLERANCES ARE NOT INCLUDED.

AMC 32	074/69	22 FEB 69
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE HARNESS RF	
TYPE & TEMPER		SIMPSON	
HEAT TREAT SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10536 X3	