


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENGINEERING REL	25 FEB 69		AS		
X1		REV. AS PER MAIL-UP POINT PX100-9-263 WAS 294	MAR 4/69		AP		

FROM	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A4 PIN 1	J2	1		RG 174/U	CABLE RF COAXIAL	
A4 PIN 2	J3	2				
A4 PIN 3	J4	3				
A4 PIN 4	J5	4				
A4 PIN 5	J6	5				
A4 PIN 6	J7	6				
A4 PIN 7	J8	7				
A4 PIN 8	J9	8		RG 174/U	CABLE RF COAXIAL	
16"	9			WL100-6	WIRE BUSS	
8	10			CU142-8	STRAP CABLE	
16	11			CU10018-1	FERRULE	
.60"	12			PX100-9-263	SLEEVING MARKED CA10542-C/W LATEST REVISION LETTER	

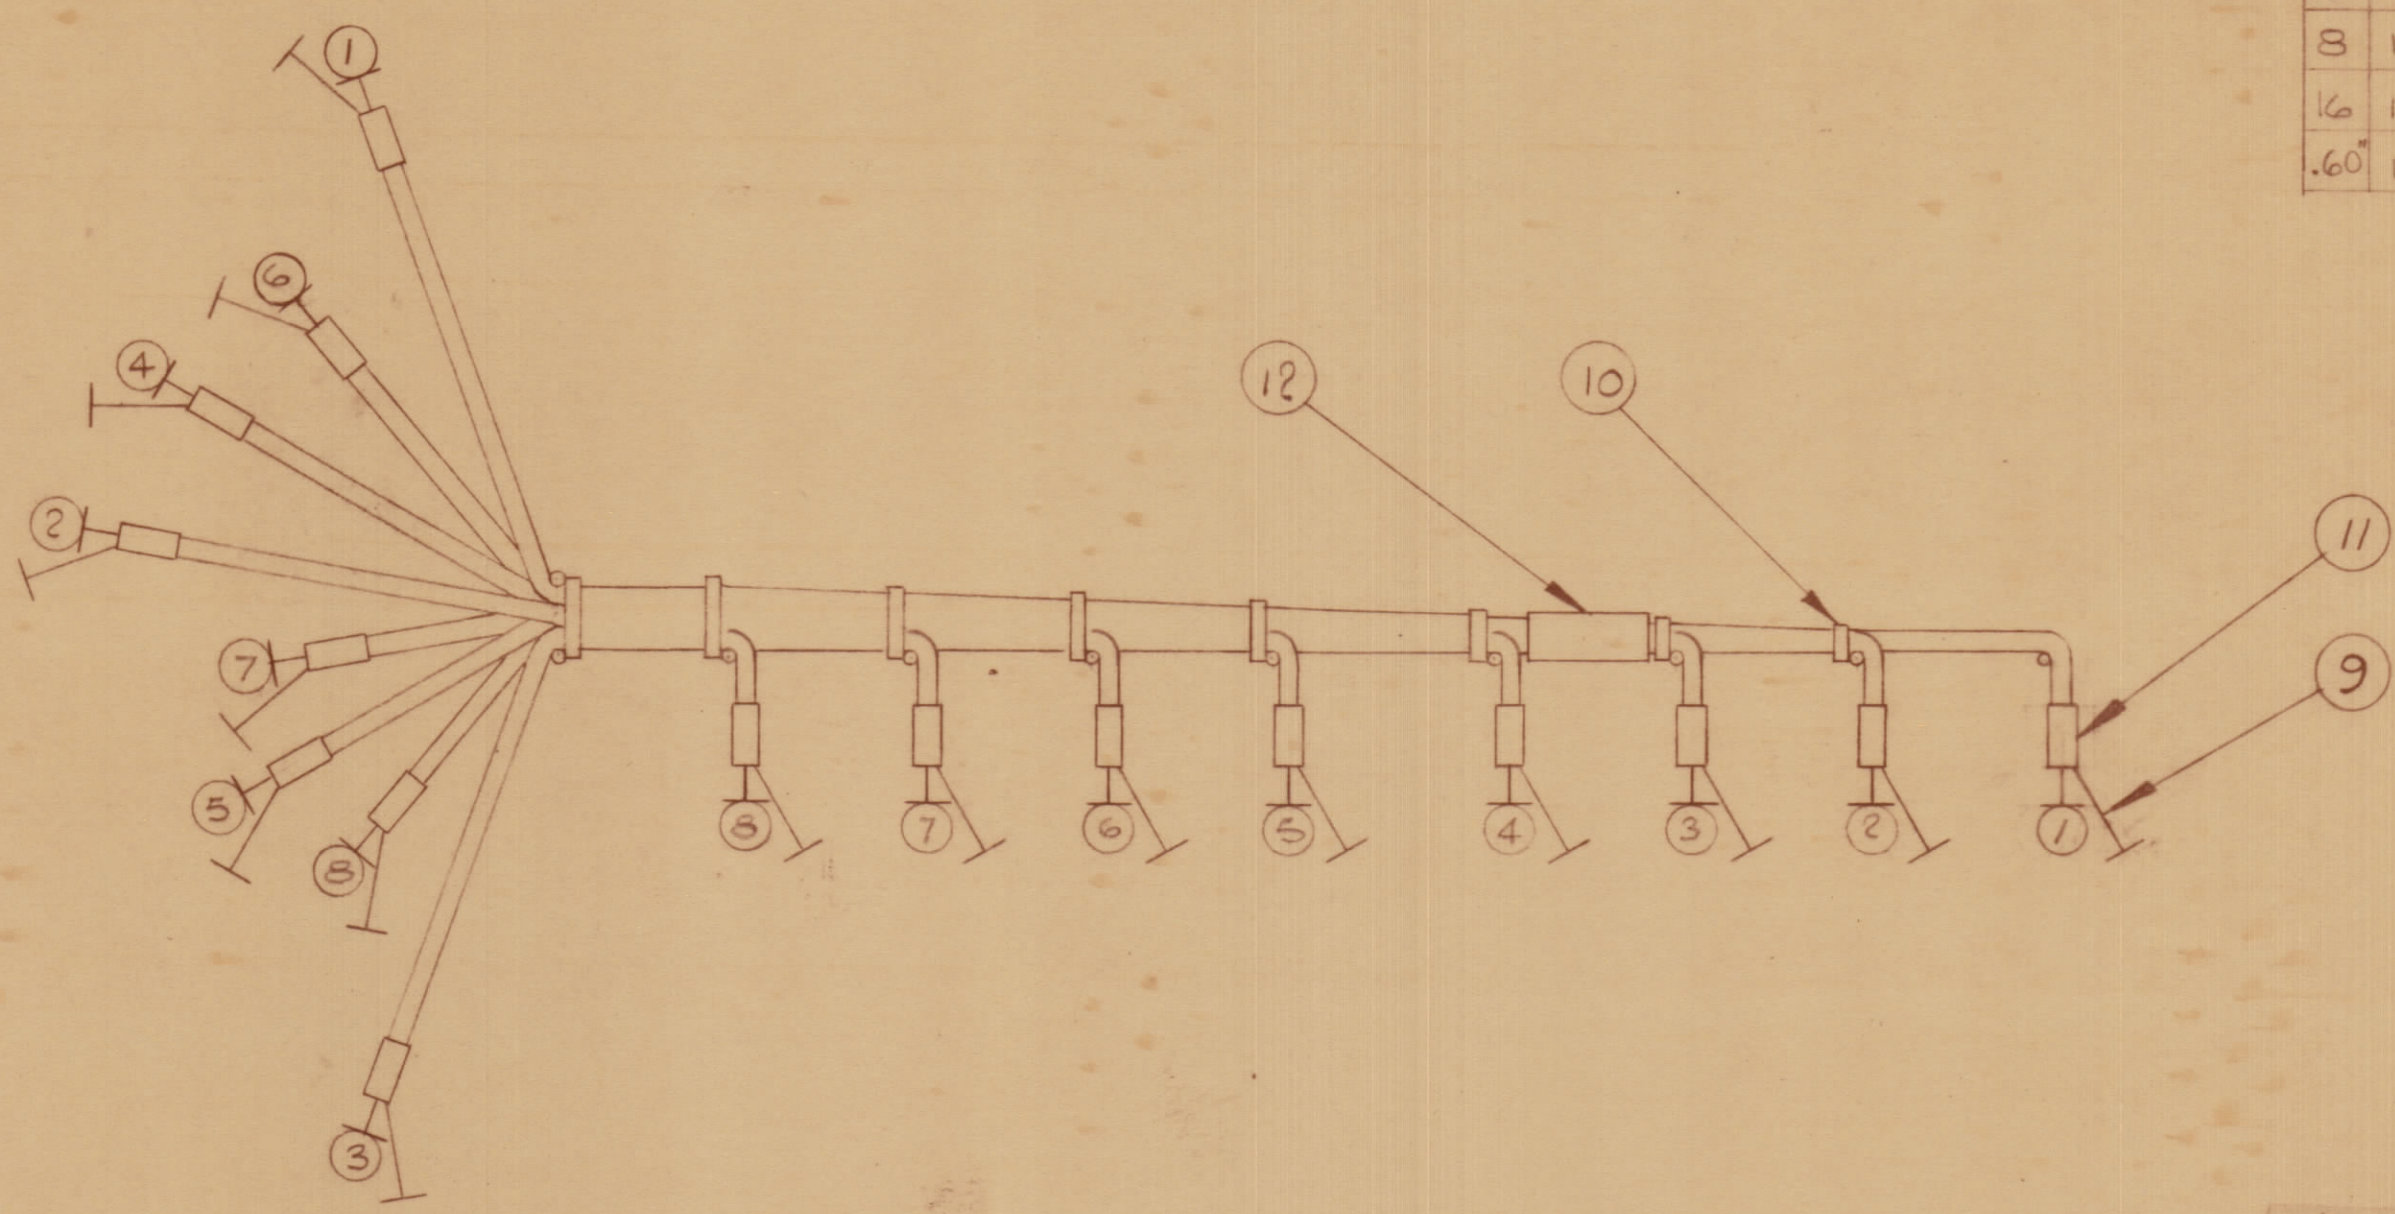

CA10542 X1

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

THE ABOVE SYMBOL DENOTES SHIELD TERMINATION WITH CUTTING LENGTH OF JUMPER INDICATED

○ DENOTES ITEM

1. ASSEMBLE HARNESS, COMMENCING WITH WIRE 8 THROUGH TO WIRE 1.

NOTES

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC DIM. ± .015 FRAC DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AMC 32	074/69	25 FEB 69
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE HARNESS RF	
TYPE & TEMPER		SIMPSON	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10542 X1	