

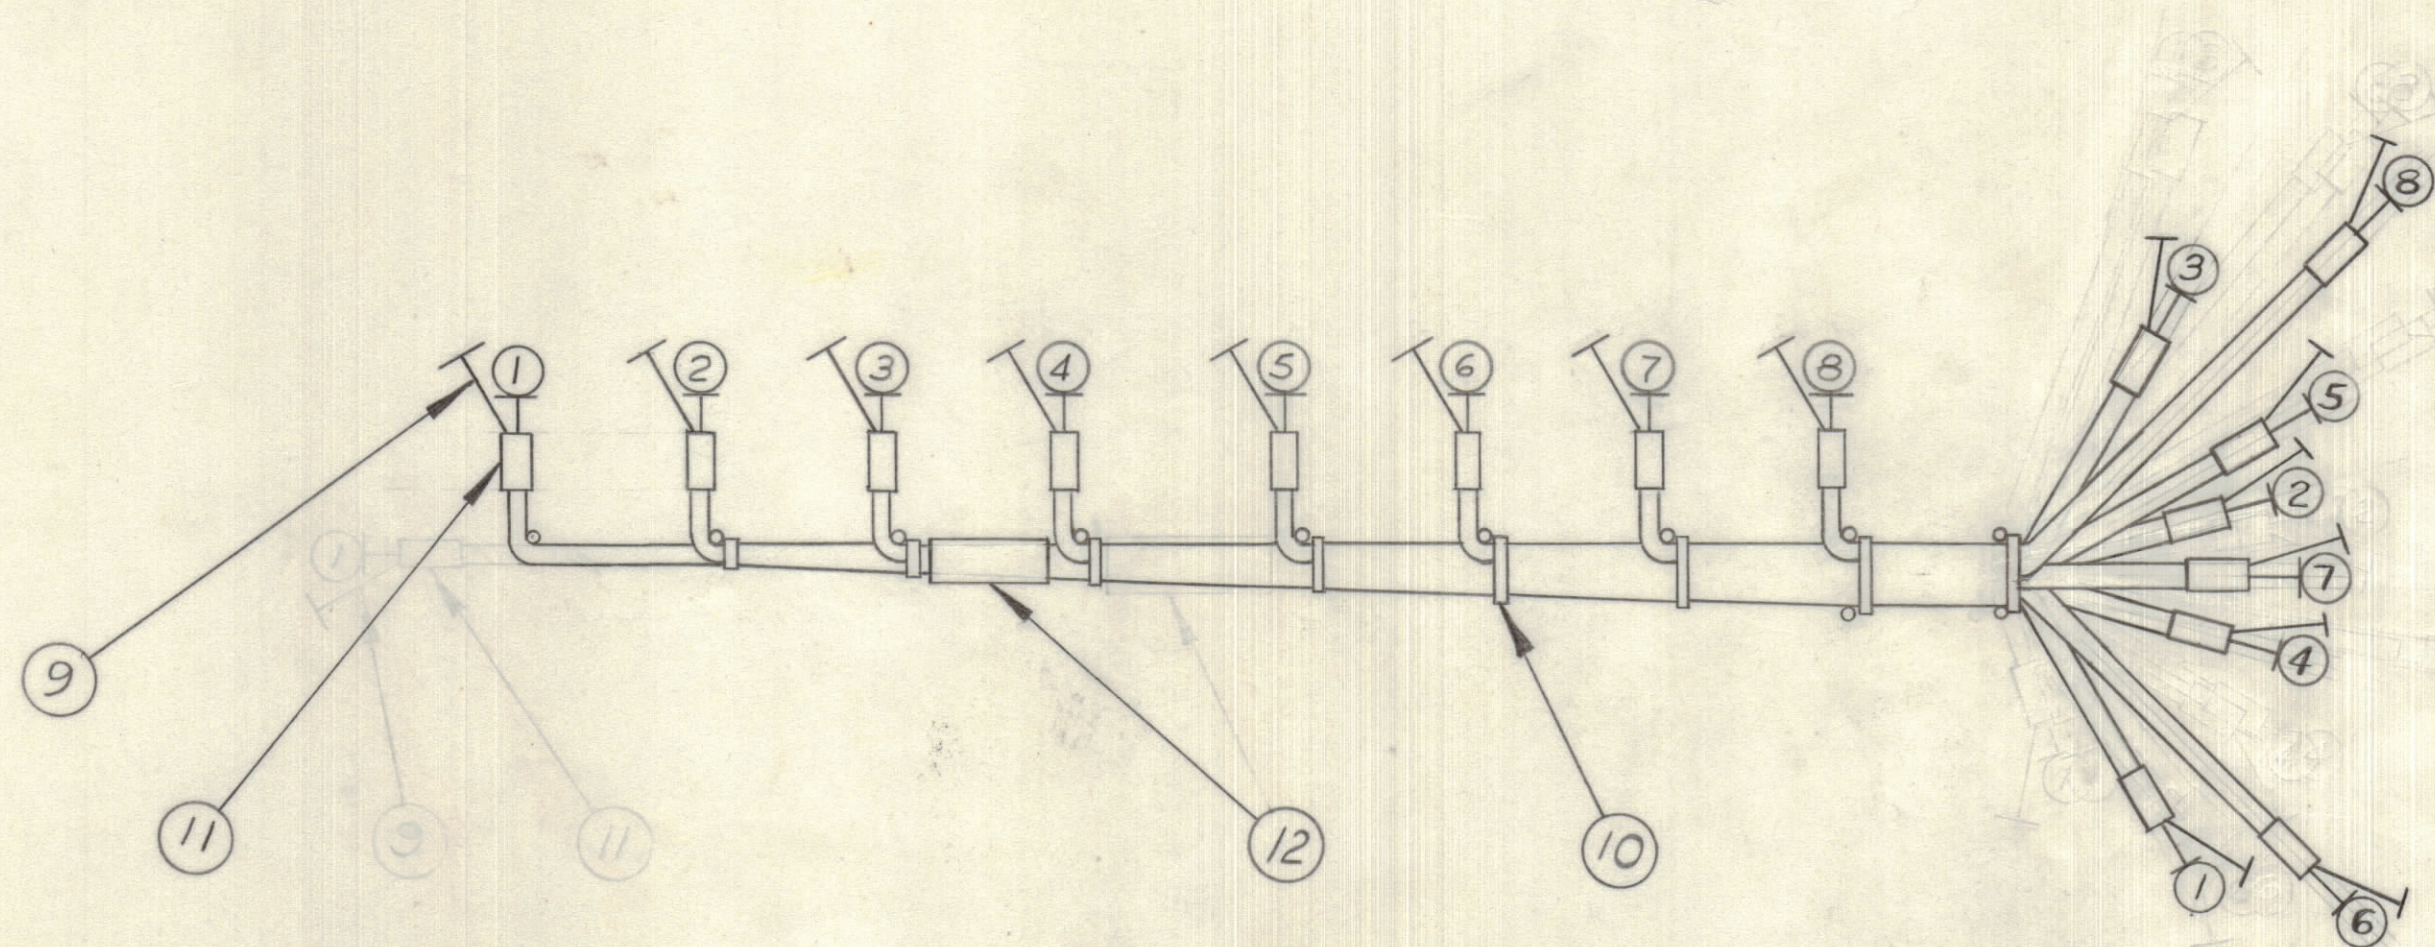
IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.


DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED


ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		REDRAWN	MAR 13/69		AP		


FROM	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A6 PIN 1	J18		1	RG 174/U	CABLE RF COAXIAL	
A6 PIN 2	J19		2			
A6 PIN 3	J20		3			
A6 PIN 4	J21		4			
A6 PIN 5	J22		5			
A6 PIN 6	J23		6			
A6 PIN 7	J24		7			
A6 PIN 8	J25		8	RG 174/U	CABLE RF COAXIAL	
			16'	9 WL100-6	WIRE BUSS	
			8	10 CU 142-8	STRAP CABLE	
			16	11 CU 10018-1	FERRULE	
			.60"	12 PX 100-9-263	SLEEVING MARKED CA 10544- C/W LATEST REVISION LETTER	



CA10544 X

 THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

 DENOTES ITEM

 THE ABOVE SYMBOL DENOTES SHIELD TERMINATION WITH CUTTING LENGTH OF JUMPER INDICATED

1. ASSEMBLE HARNESS, COMMENCING WITH WIRE 1 THROUGH TO WIRE 8.

NOTES

TOLERANCES	SCALE: 1:1
ALL DEC. DIM. ± .XX*.05	DRILL, PUNCH, COMMERCIAL STOCK
OTHERS FRAC. DIM. ± 1/64 .XX*.01	SIZES AND MANUFACTURERS
ANGULAR DIM. ± 0° 30' .XXX*.005	TOLERANCES ARE NOT INCLUDED.

AMC 32	074 169	25 FEB 69
MODEL	PROJECT NO.	DATE

TMC (Canada) LIMITED			
STOCK SIZE		OTTAWA ONTARIO	
CABLE, HARNESS, RF			
MATERIAL	WEIGHT PER PC.		
TYPE & TEMPER		AP	
		DRAWN	ELEC. DES. APP. MECH. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10544 X	