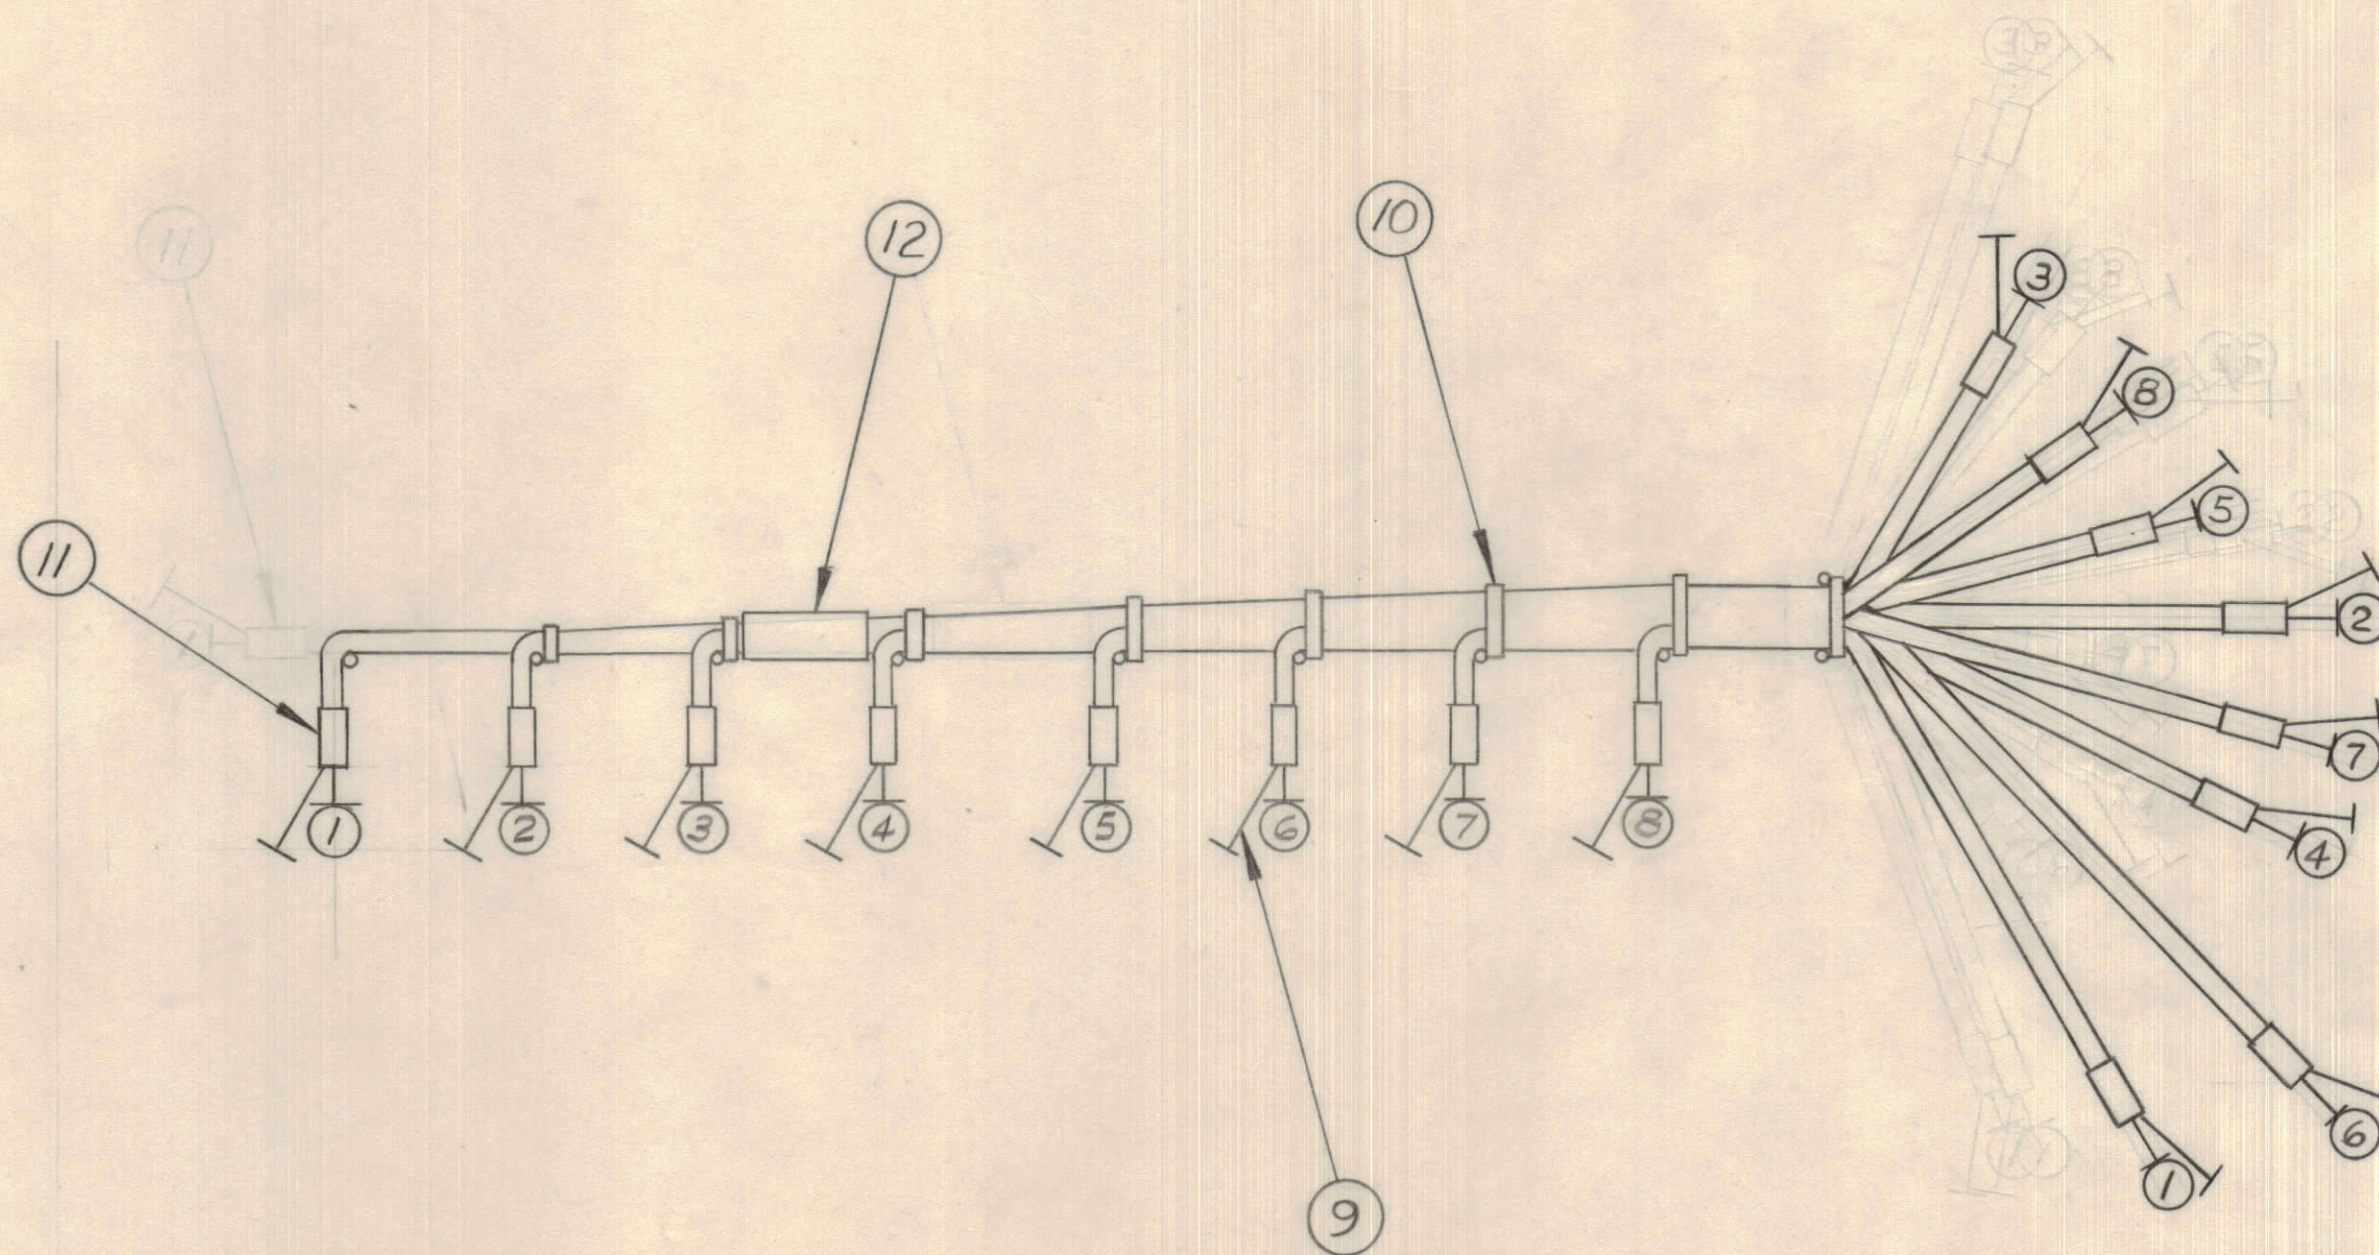



IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		REDESIGNED			AP		

FROM	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A7 PIN 1	J26		1	RG 174/U	CABLE RF COAXIAL	
A7 PIN 2	J27		2			
A7 PIN 3	J28		3			
A7 PIN 4	J29		4			
A7 PIN 5	J30		5			
A7 PIN 6	J31		6			
A7 PIN 7	J32		7			
A7 PIN 8	J33		8	RG 174/U	CABLE RF COAXIAL	
16"	9	WL 100-6			WIRE BUSS	
8	10	CU142-8			STRAP CABLE	
16	11	CU 10018-1			FERRULE	
.60"	12	PX 100-9-263			SLEEVING MARKED CA 10545- C/W LATEST REV LETTER	


NOTE:
WHEN LAYING IN LEADS BEGIN WITH PIN #1 AND PROCEED IN AN ASCENDING ORDER.



CA10545 X


THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

○ DENOTES ITEM


THE ABOVE SYMBOL DENOTES SHIELD TERMINATION WITH CUTTING LENGTH OF JUMPER INDICATED.

TOLERANCES		SCALE: 1/1
ALL OTHERS	DEC. DIM. ± .X = .05 FRAC. DIM. ± 1/64 = .XX = .01 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AMC 32	074/69	25 FEB 69
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE, HARNESS, RF	
TYPE & TEMPER		AP	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA 10545 X	