


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.							DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED	
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.								
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.	
X		ENGINEERING REL		MAR 13/69	AP			

FROM	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A4 PIN 1	J2		1	RG 174/U	CABLE RF COAXIAL	
A4 PIN 2	J3		2			
A4 PIN 3	J4		3			
A4 PIN 4	J5		4			
A4 PIN 5	J6		5			
A4 PIN 6	J7		6			
A4 PIN 7	J8		7			
A4 PIN 8	J9		8	RG 174/U	CABLE RF COAXIAL	
		16"	9	WL100-6	WIRE BUSS	
		8	10	CU142-8	STRAP CABLE	
		16	11	CU10018-1	FERRULE	
		.60"	12	PX100-9-263	SLEEVING MARKED CA10546-C/W LATEST REVISION LETTER	

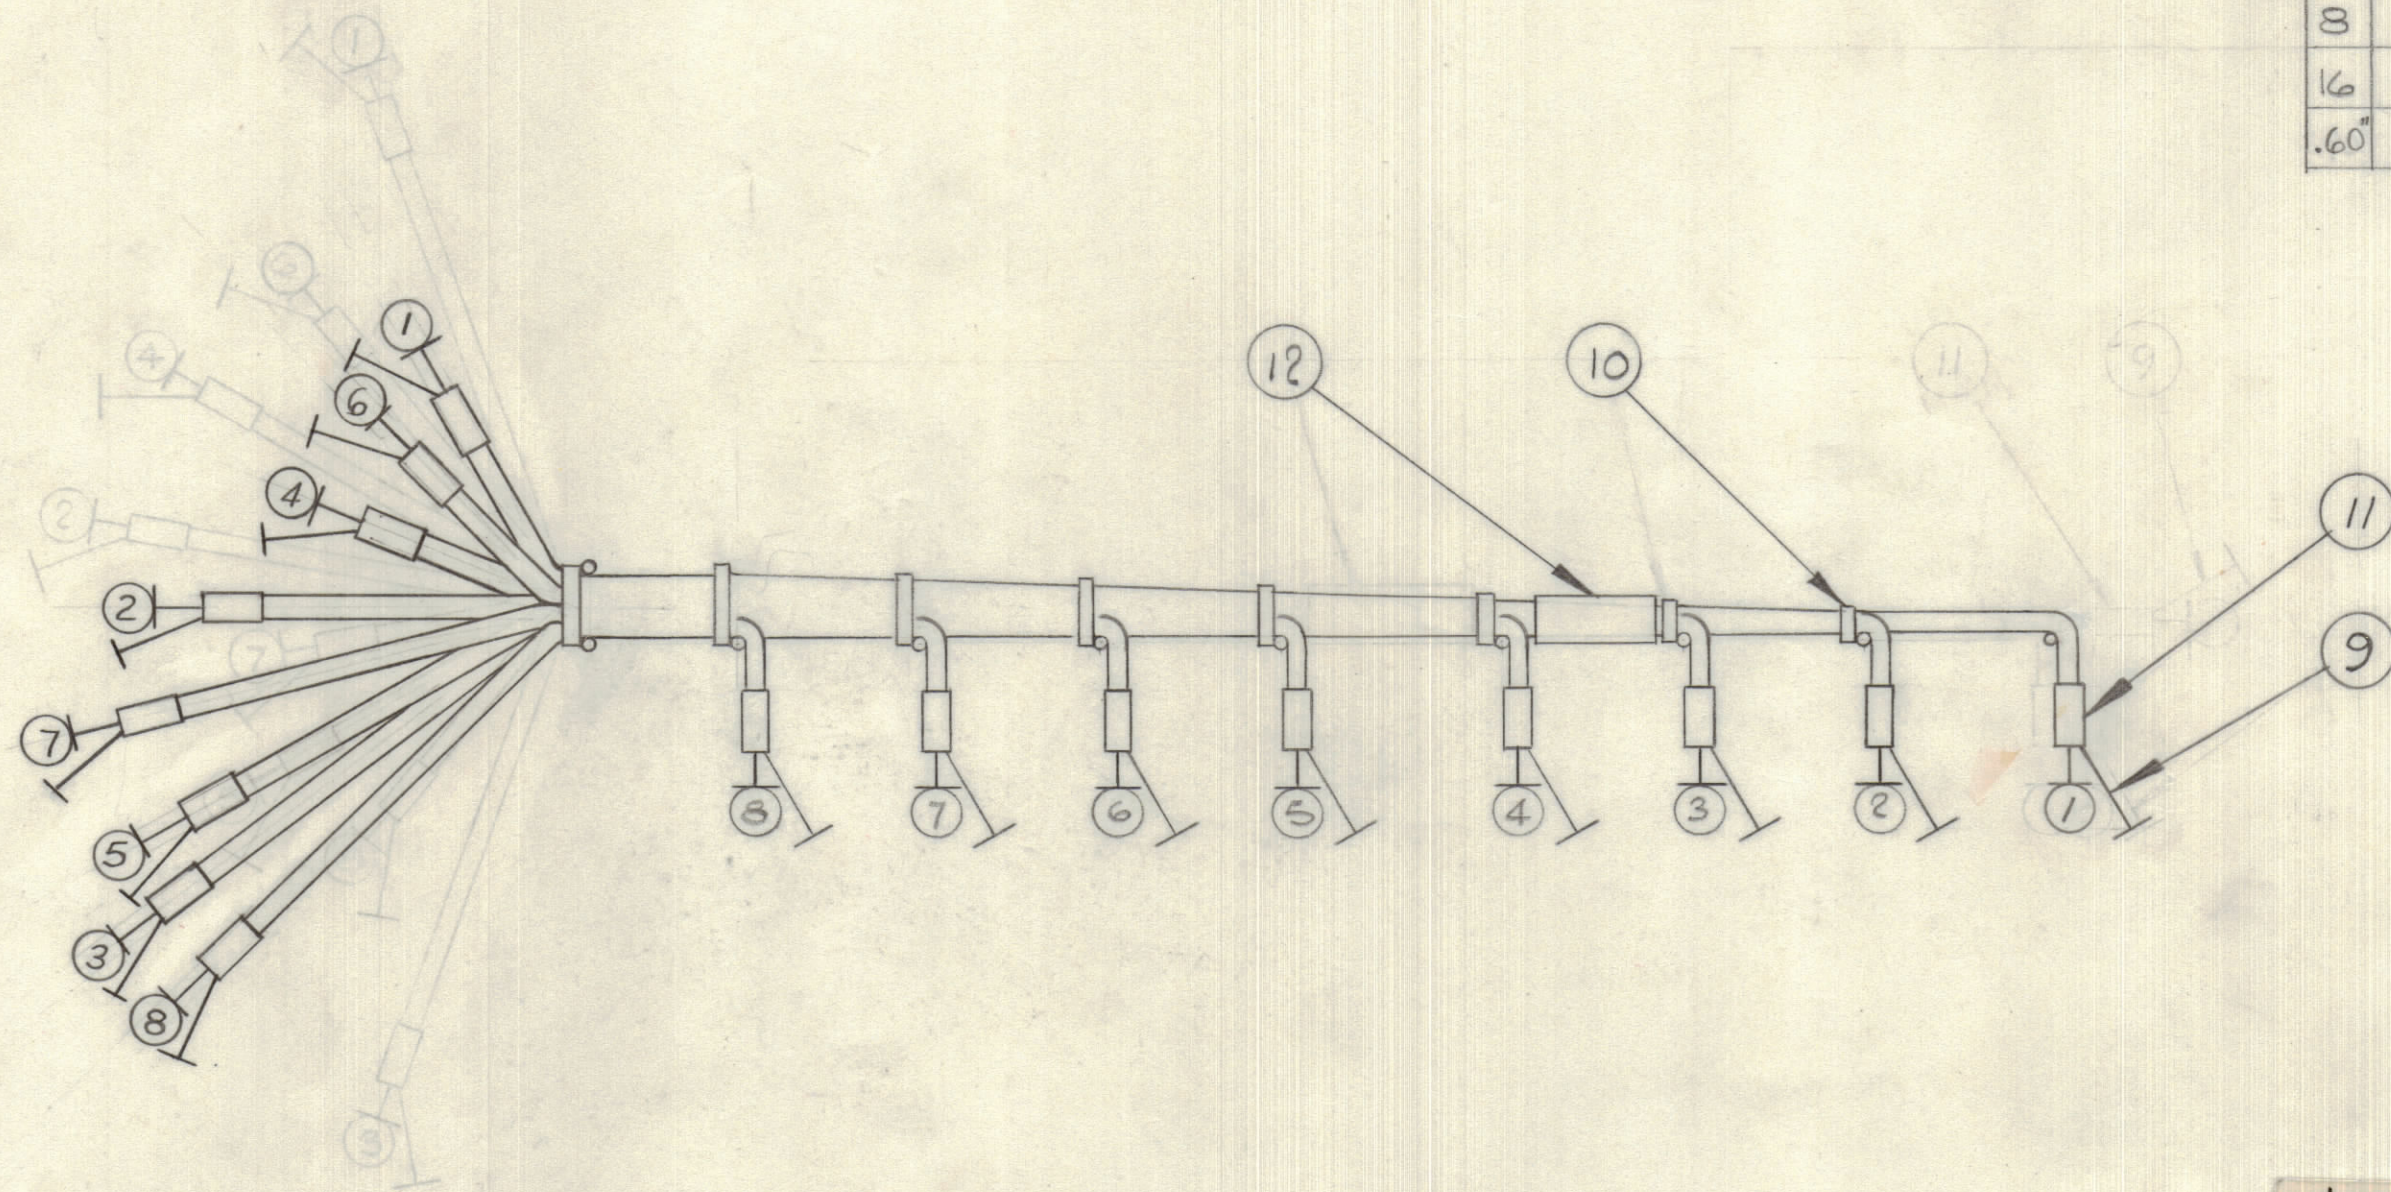

CA10546 X

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

THE ABOVE SYMBOL DENOTES SHIELD TERMINATION WITH CUTTING LENGTH OF JUMPER INDICATED

○ DENOTES ITEM

1. ASSEMBLE HARNESS, COMMENCING WITH WIRE 1 THROUGH TO WIRE 8.
NOTES

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± .015 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

AMC 32	074/69	25 FEB 69
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE HARNESS RF	
WEIGHT PER PC.		AP	
TYPE & TEMPER		DRAWN	ELEC. DES. APP.
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10546 X	