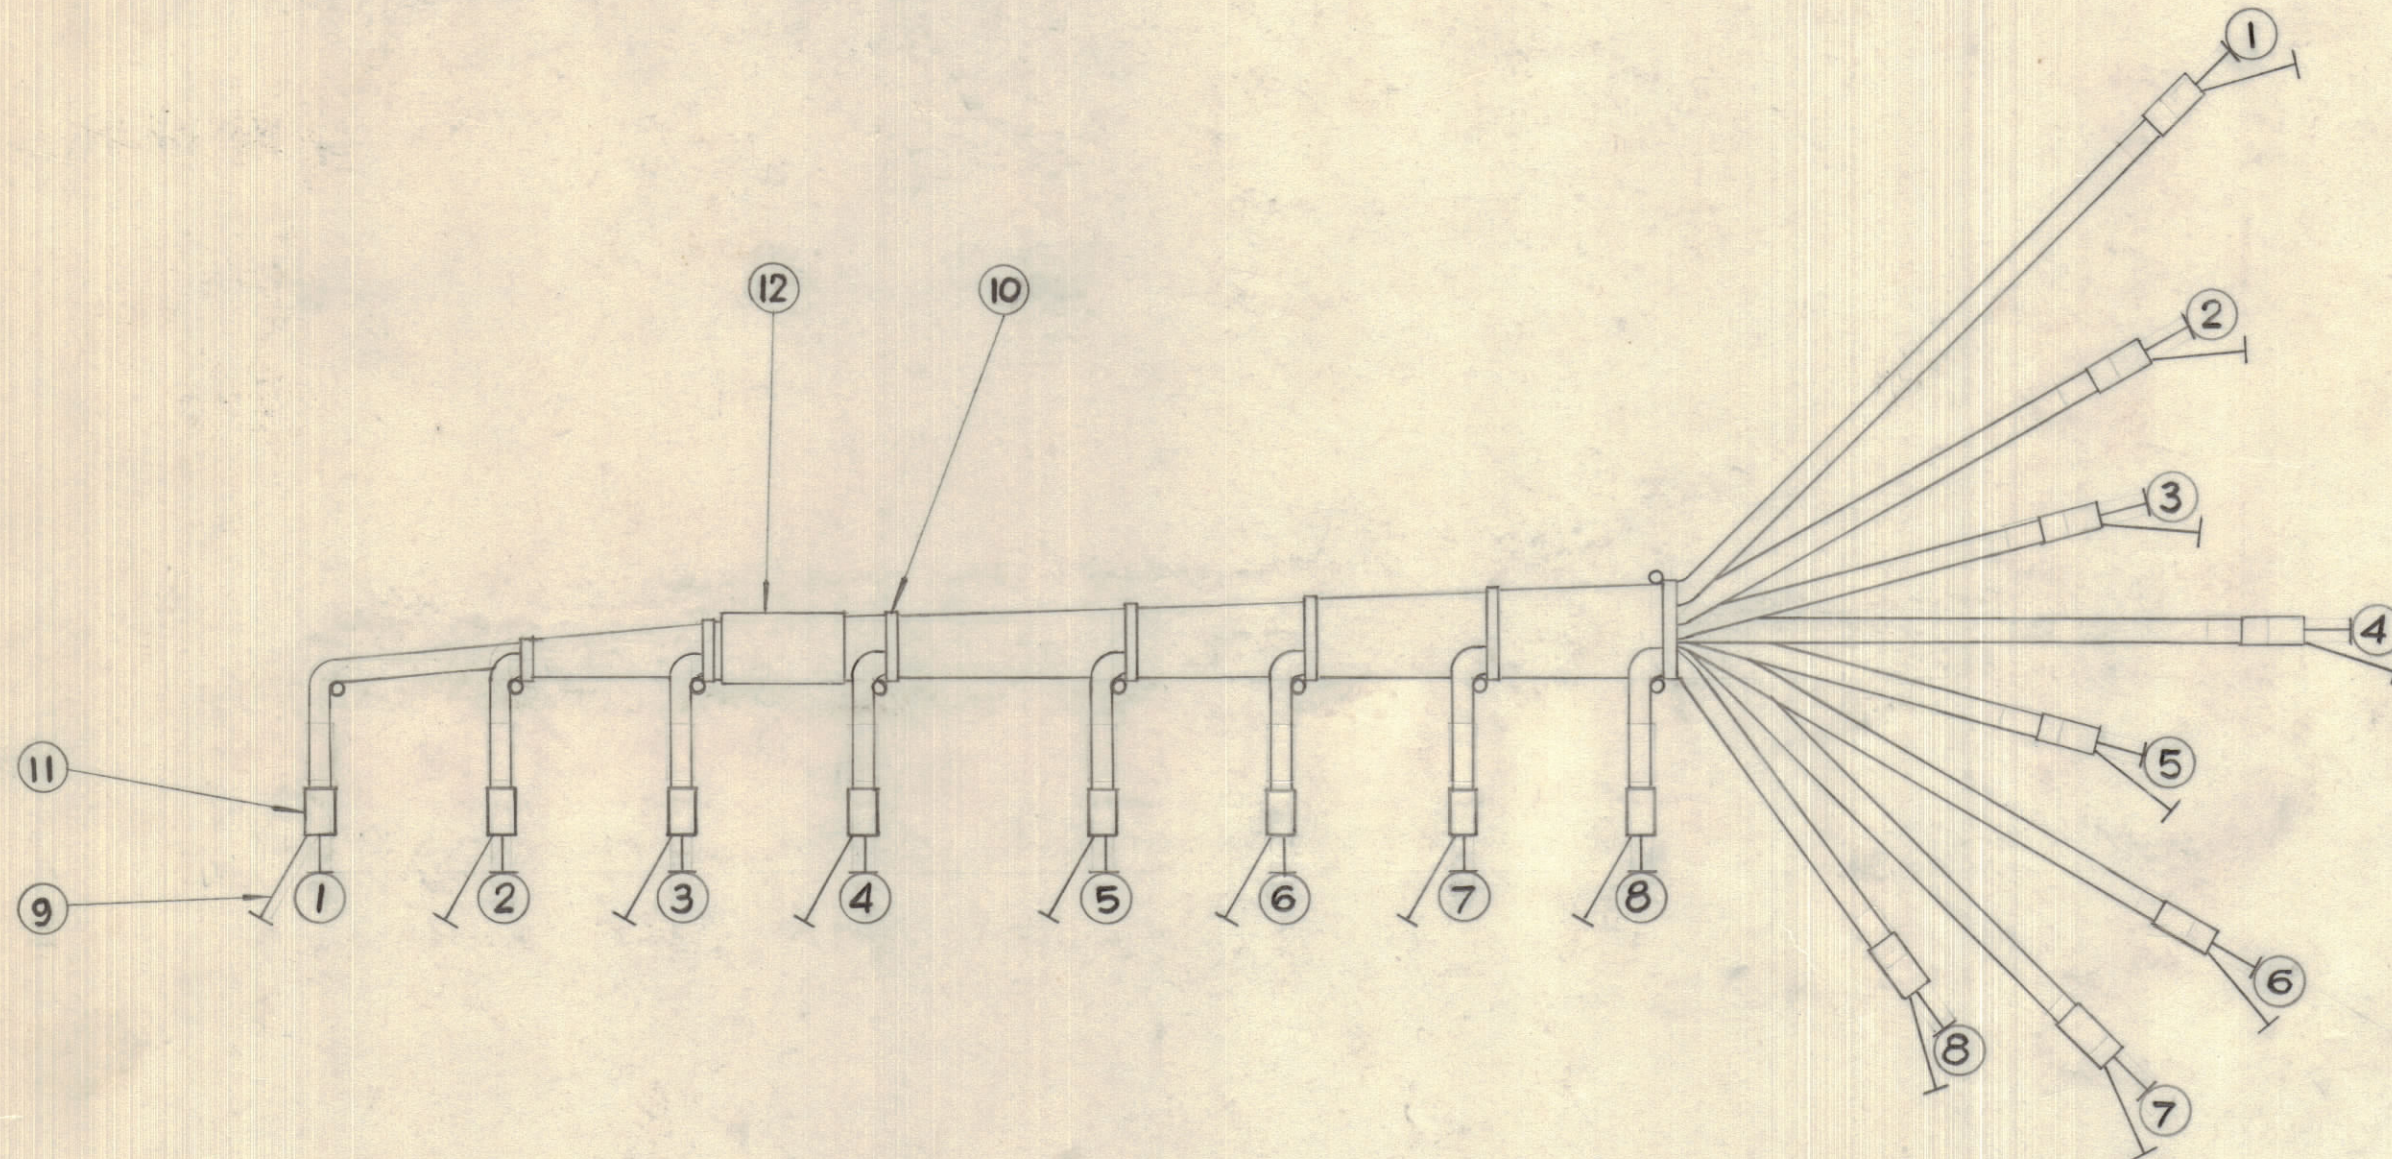



IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.					DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED		
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENGINEERING REL.	MAR 25, 69		AHa		
X1		CONNECTION INFORMATION FROM A4 TO J2-39 DELETED	MAR 28, 69		AHa		
X2		A6 WAS A7; ITEM 12 WAS PX100-9-263	MAR 31, 69		AHa		


FROM	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
PIN 1-A6	J 26		1	RG 174/U	CABLE RF COAXIAL	
2-A6	J 27		2			
3-A6	J 28		3			
4-A6	J 29		4			
5-A6	J 30		5			
6-A6	J 31		6			
7-A6	J 32		7			
8-A6	J 33		8	RG 174/U	CABLE RF COAXIAL	
16"	9		9	WL 100-6	WIRE BUS	
8	10		10	CU 142-B	STRAP CABLE	
16	11		11	CU 10018-1	FERRULE	
.60"	12		12	PX 100-9-234	SLEEVING MARKED CA 10547 C/W LATEST REV. LETTER	

NOTE:
WHEN LAYING IN LEADS BEGIN WITH PIN #1 AND PROCEED IN AN ASCENDING ORDER.



CA 10547 X2


THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.


THE ABOVE SYMBOL DENOTES SHIELD TERMINATION WITH CUTTING LENGTH OF JUMPER INDICATED.

TOLERANCES		SCALE:	1 : 1
ALL	DEC. DIM. ± .XX-.05	DRILL, PUNCH, COMMERCIAL STOCK	
OTHERS	FRAC. DIM. ± 1/64 .XX-.01	SIZES AND MANUFACTURERS	
	ANGULAR DIM. ± 0° 30' .XXX-.005	TOLERANCES ARE NOT INCLUDED.	

AMC 32	074 / 69	MAR 25, 69
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE, HARNESS, RF	
WEIGHT PER PC.		AHa	
TYPE & TEMPER		DRAWN	ELEC. DES. APP.
HEAT TREAT. SPEC.		CHECKED	MECH. DES. APP.
FINISH & SPEC. NO.		FINAL APPROVAL	
		CA 10547 X2	