


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.				DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED			
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		REL. TO PROD.	AUG. 20, 69		Y.M.		

BREAK OUT	FROM COMPONENT	BREAK OUT	TO COMPONENT	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A	FEED THRU. C1	B			1	LW-C-24-7U-1	WIRE ELECTRICAL INSUL	
A	▲	C2	B		2	▲ -2	▲	
A		C3	B		3	-3		
A		C4	B		4	-4		
A		C5	B		5	-5		
A		C6	B		6	-6		
A	▼	C7	B		7	▼ -7	▼	
A	FEED THRU C8	B			8	LW-C-24-7U-8	WIRE ELECTRICAL INSUL	
					8	9 CUI42-8	STRAP CABLE	
					10	PX100-9-166	SLEEVING MARKED CA & LATEST REVISION LETTER	
					11			
					12			

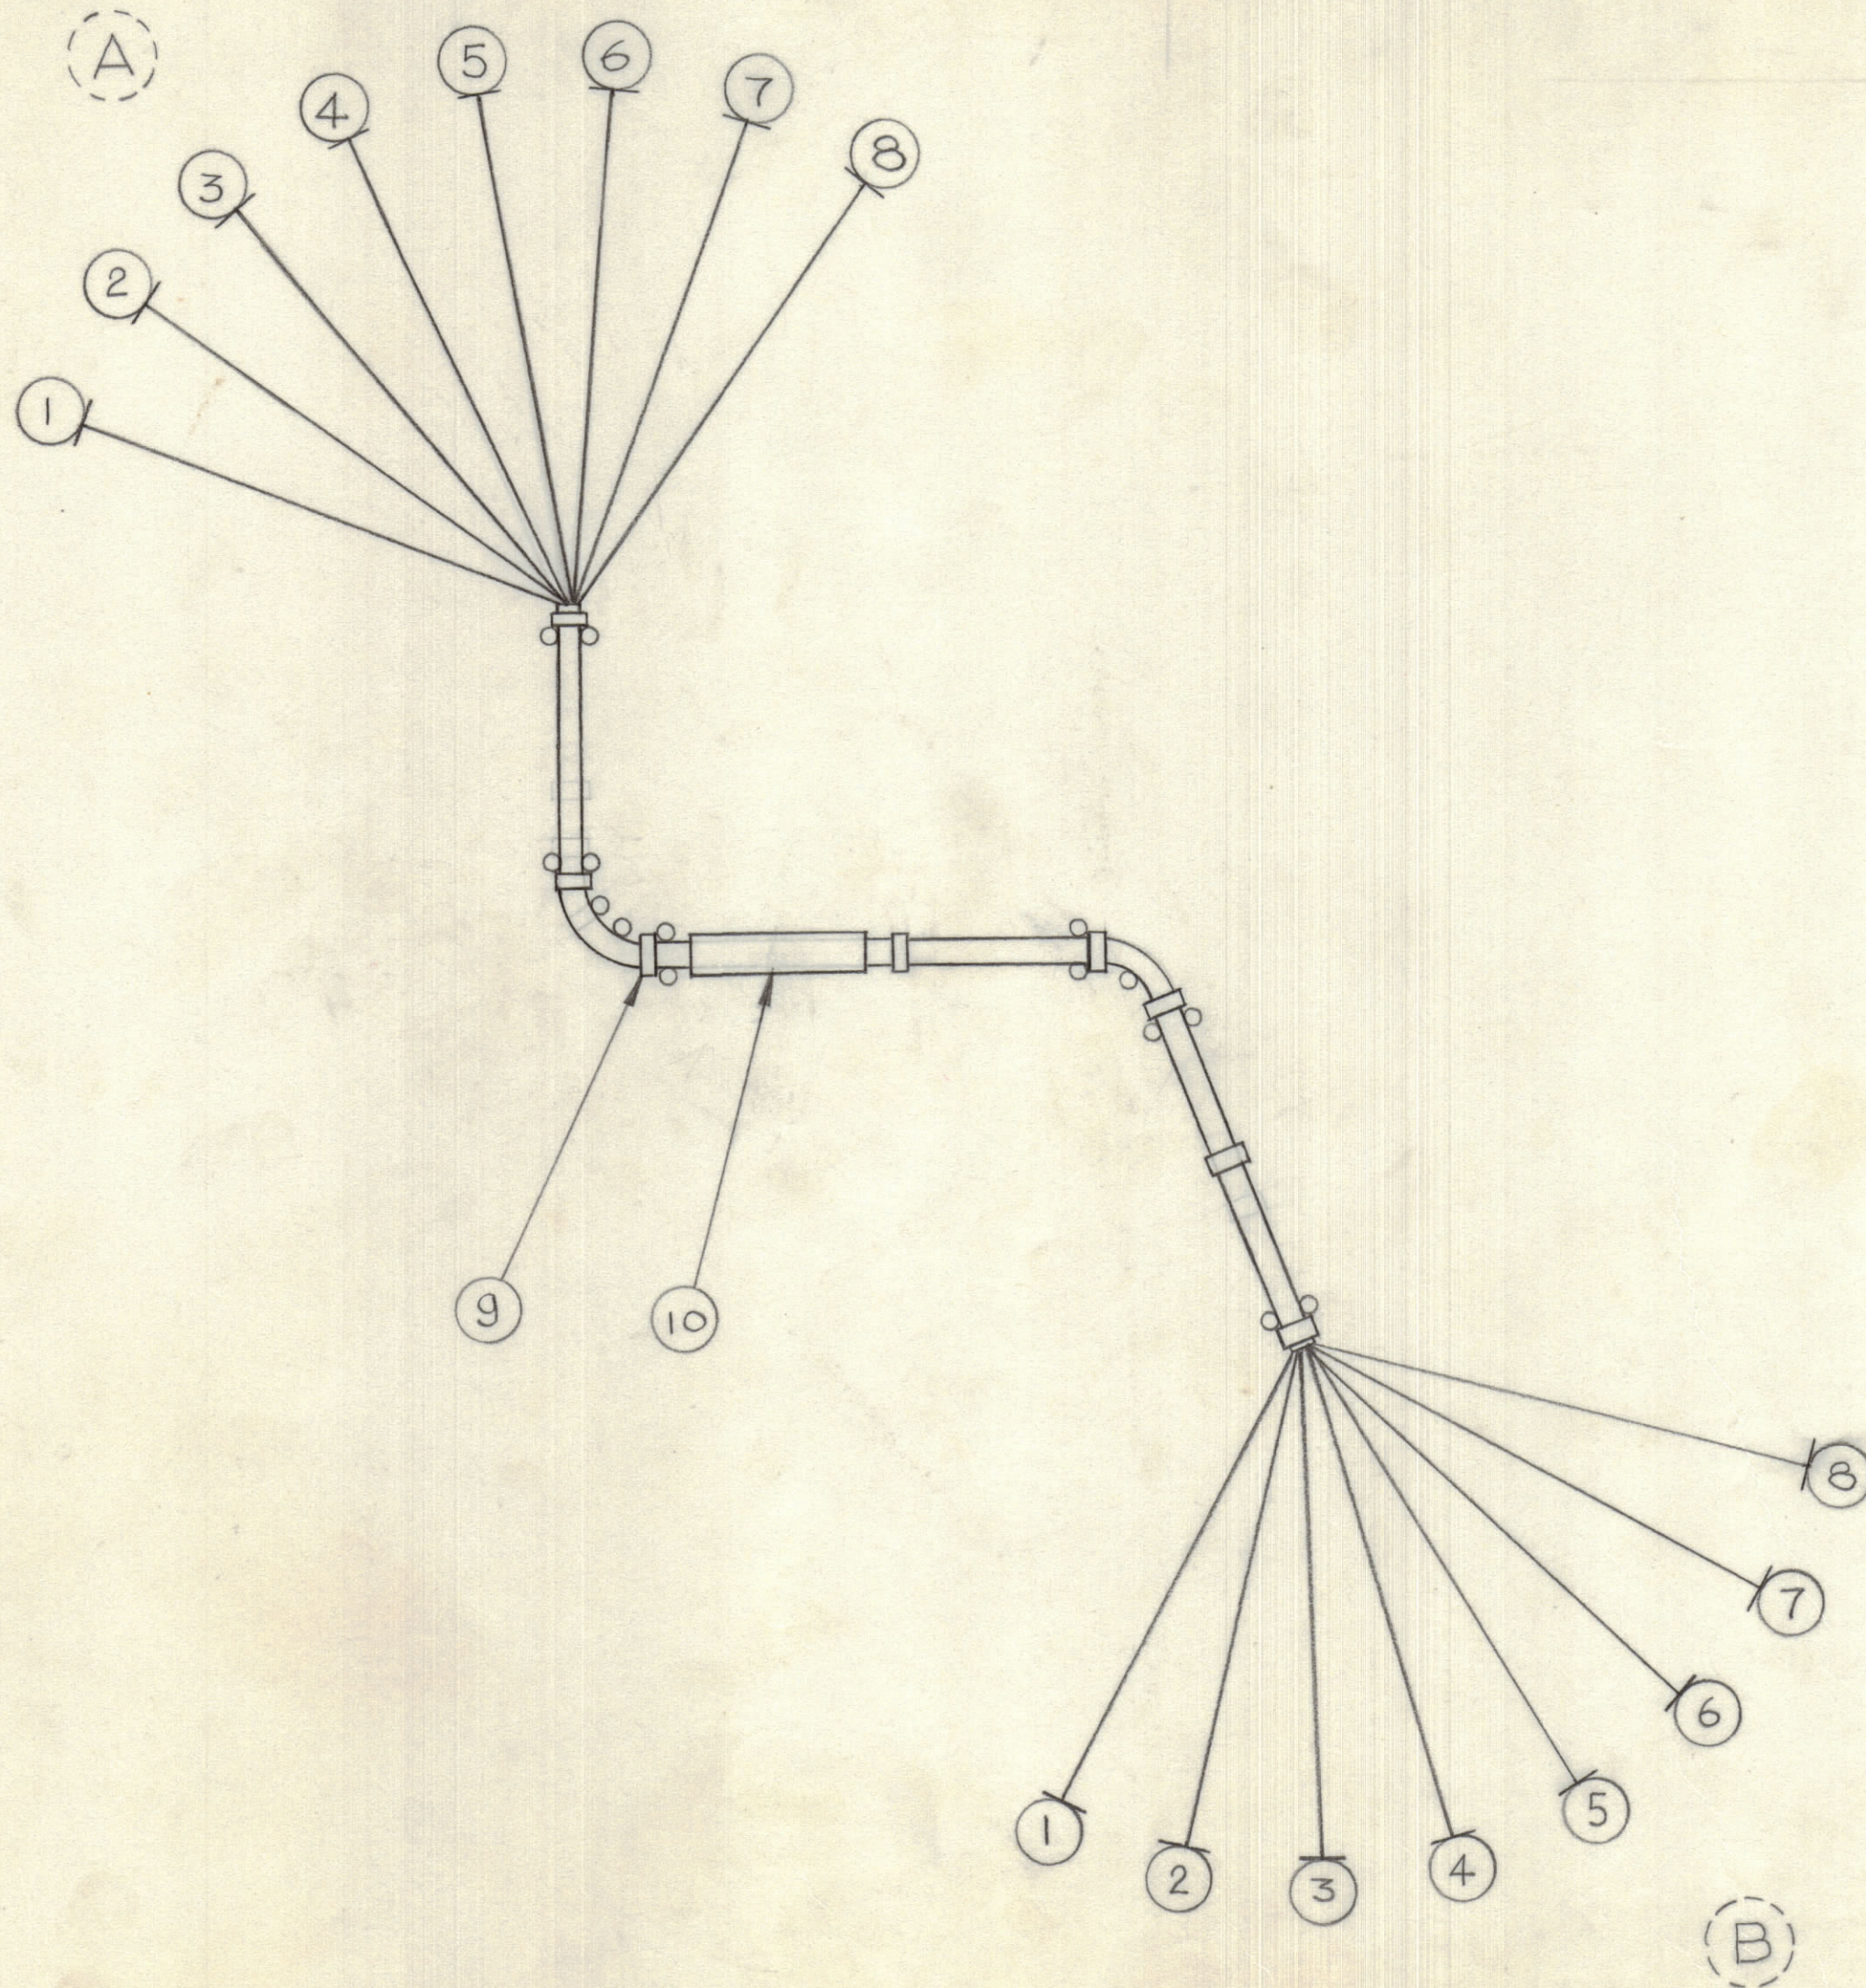

CA10559

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

SYMBOL	DENOTES
○	ITEM
⊖	BREAK OUT

No other side

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± 1/64 FRAC. DIM. ± 1/64 ANGULAR DIM. ± 0° 30'	.X+.05 .XX+.01 .XXX+.005 DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MTR	087/69	AUG. 20, 1969
MODEL	PROJECT NO.	ASS'Y. NO.
USED ON		

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		WIRING HARNESS	
TYPE & TEMPER		Y. MORI	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10559	