


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Q		PROD. RELEASE	MAR 17-71		G.C.T.	<i>Pa</i>	<i>Pa</i>

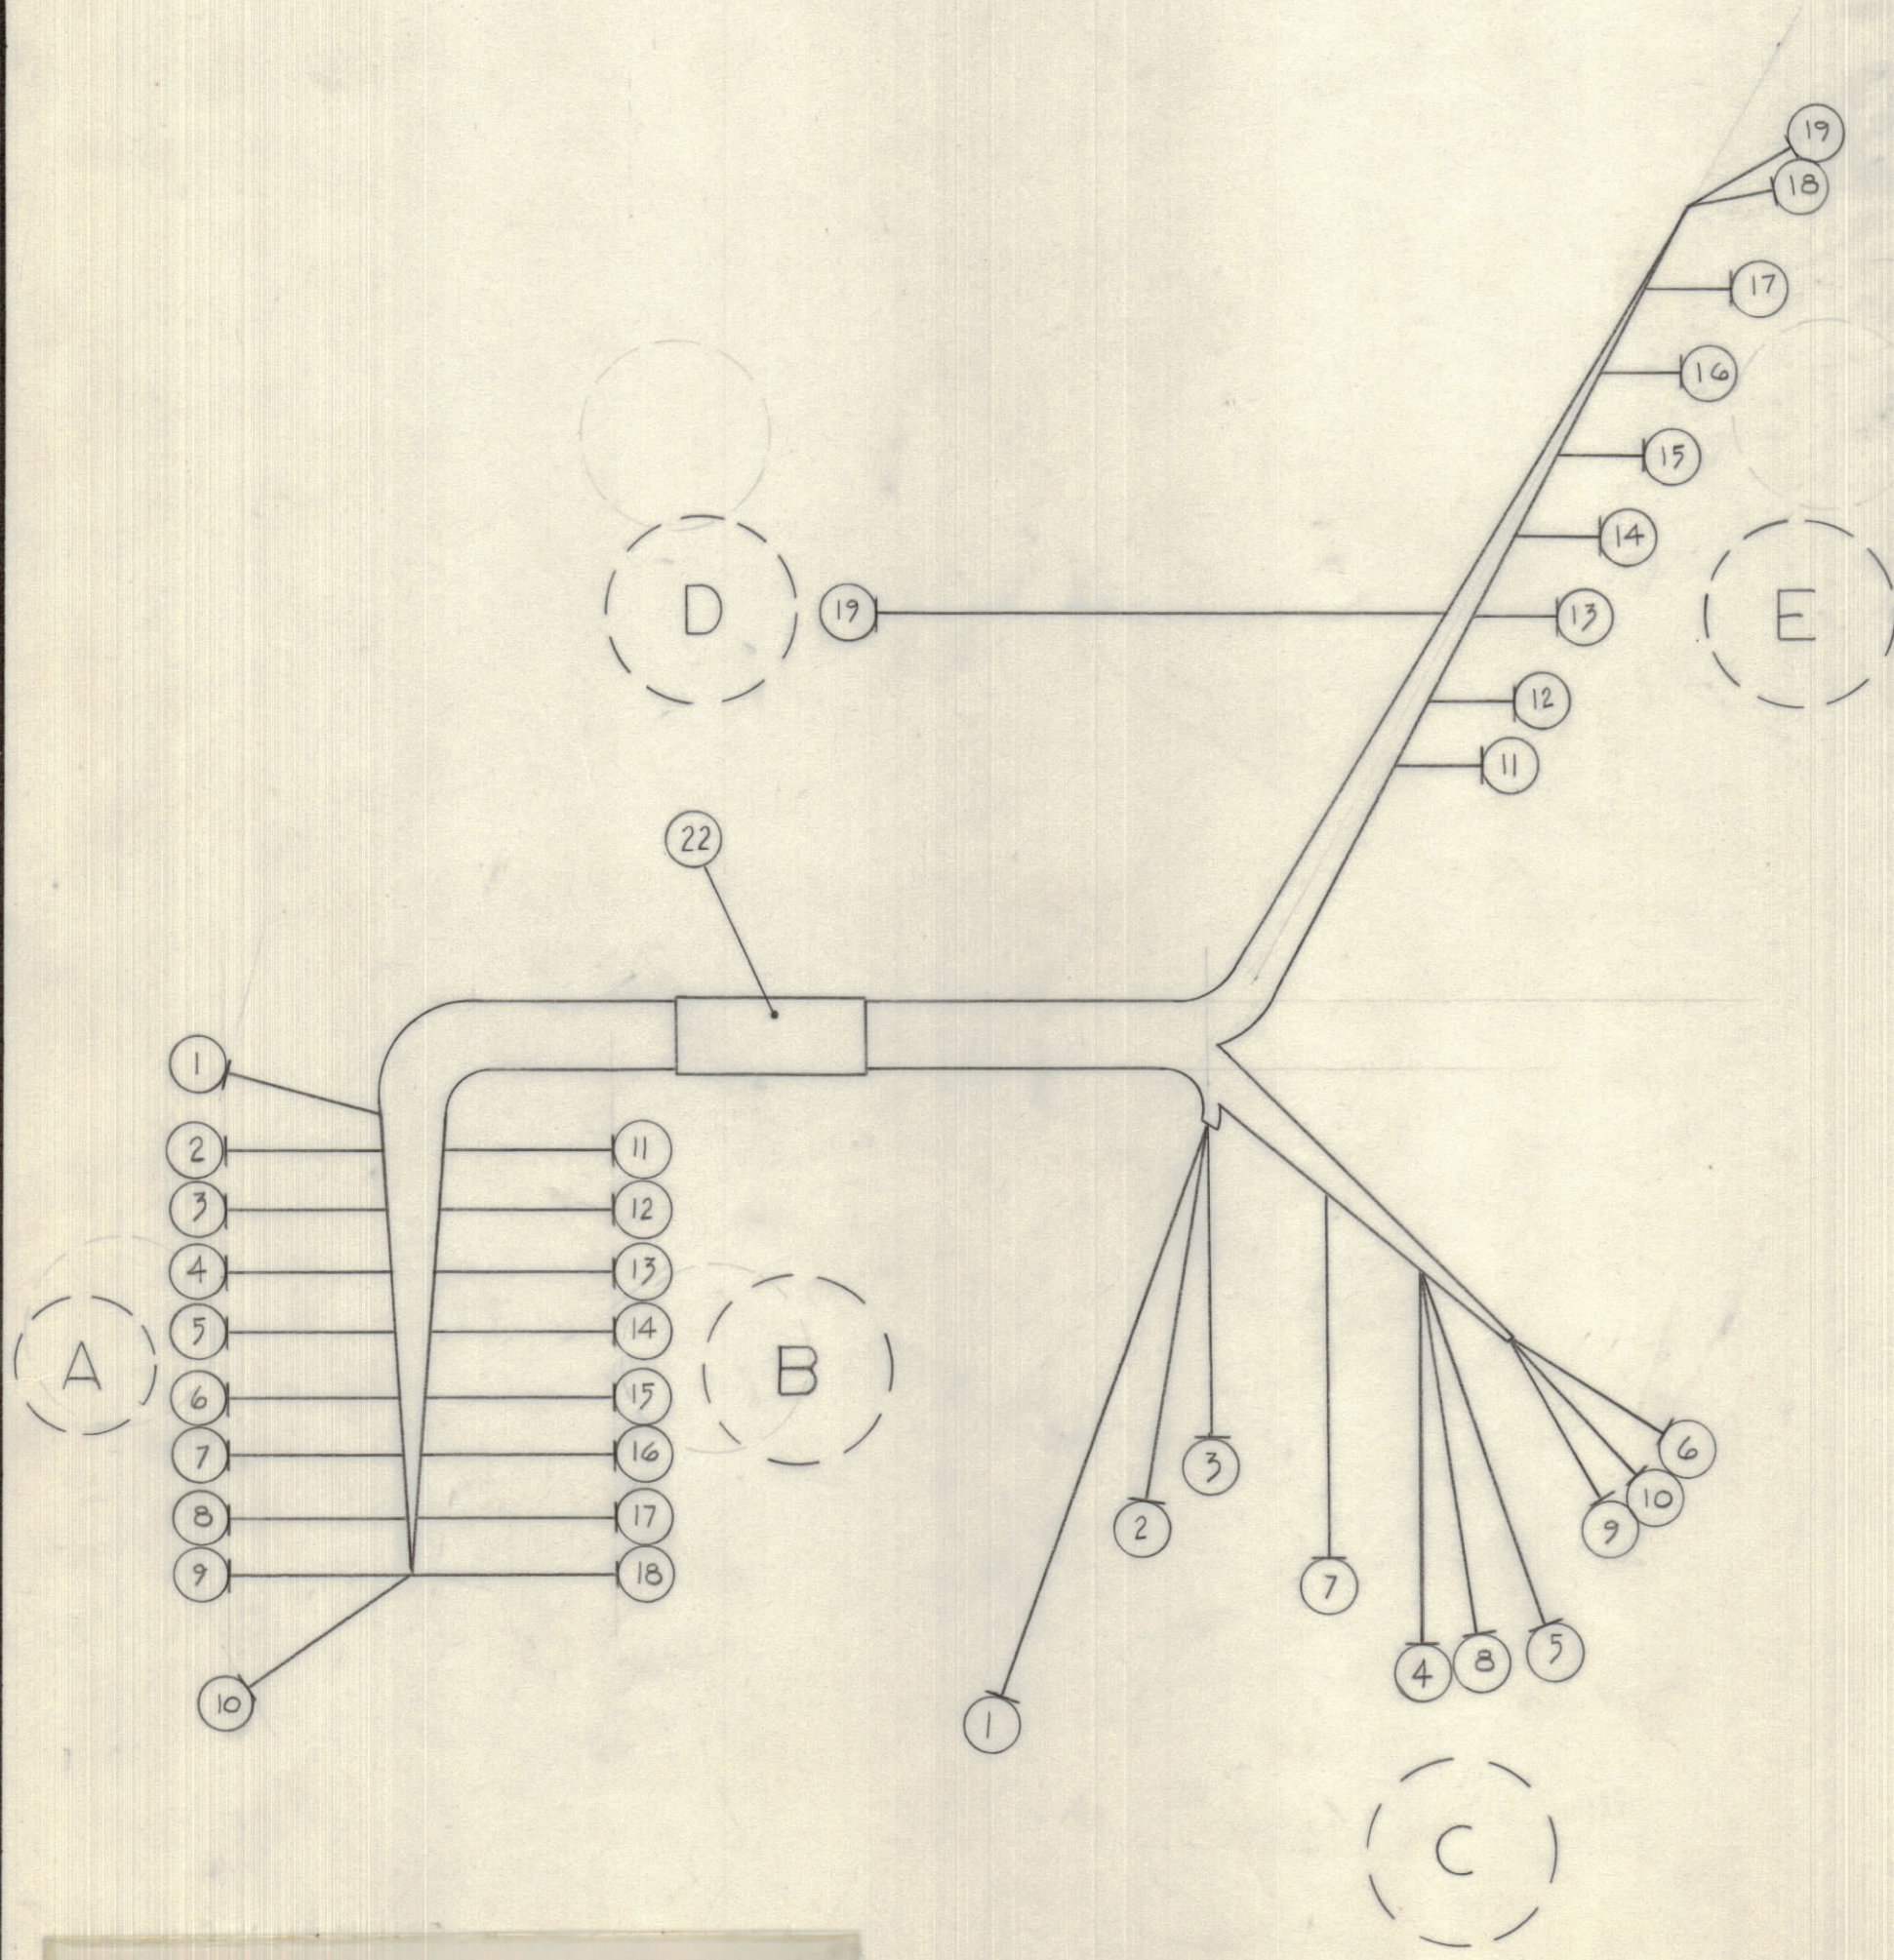

B'OUT	FROM	B'OUT	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A	A10890 BAND 1	C	S3-6 REAR	1		MWC18(16)U-1	WIRE ELEC. INSULATED	
A	BAND 2	C	S3-7 REAR	2		-2		
A	BAND 3	C	S3-8 REAR	3		-3		
A	BAND 4	C	S3-9 REAR	4		-4		
A	BAND 5	C	S3-10 REAR	5		-5		
A	BAND 6	C	S3-11 REAR	6		-6		
A	BAND 7	C	S3-8 FRONT	7		-7		
A	BAND 8	C	S3-9 FRONT	8		-8		
A	BAND 9	C	S3-10 FRONT	9		-9		
A	A10890 BAND 10	C	S3-11 FRONT	10		-90		
B	A10890 CHAN 1	E	S5D-7 REAR	11		-1		
B	CHAN 2	E	S5D-8 REAR	12		-2		
B	CHAN 3	E	S5D-9 REAR	13		-3		
B	CHAN 4	E	S5D-10 REAR	14		-4		
B	CHAN 5	E	S5D-11 REAR	15		-5		
B	CHAN 6	E	S5D-12 REAR	16		-6		
B	CHAN 7	E	S5D-1 REAR	17		-7		
B	A10890 CHAN 8	E	S5D-2 REAR	18		-8		
D	C14+ R12 JUNC	E	S5D-2 FRONT	19		MWC18(16)U-92	WIRE ELEC INSULATED	
						20		
				27	21	CU142-8	STRAP CABLE	
				1"	22	PX100-9-375	SLEEVING MARKED CA10629 C/W LATEST REV. LETTER	
					23			

CA10629 Q

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

NOTES :-


TOLERANCES		SCALE: 1:1
ALL	DEC. DIM. ± .05	DRILL, PUNCH, COMMERCIAL STOCK
OTHERS	FRAC. DIM. ± 1/64 .XX*.01	SIZES AND MANUFACTURERS
	ANGULAR DIM. ± 0° 30' .XXX*.008	TOLERANCES ARE NOT INCLUDED.

MTR 100A	087 / 70	17TH MAR 71
MODEL	PROJECT NO.	ASS'Y. NO.
		DATE

STOCK SIZE		TMC (Canada) LIMITED	
		OTTAWA ONTARIO	
MATERIAL		CABLE ASSY BAND	
WEIGHT PER PC.			
TYPE & TEMPER		G.C. THOMPSON	
		DRAWN	
		ELEC. DES. APP.	
		MECH. DES. APP.	
HEAT TREAT. SPEC.		DS NORTON	
		CHECKED	
		FINAL APPROVAL	
FINISH & SPEC. NO.		CA10629 Q	

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
X		ENG RELEASE	5 AUG 70				

BOUT	FROM	BOUT	TO	REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
A	A10890 BAND 1	C	S3-6 REAR	1		MWC18(16)U-1	WIRE ELEC INSULATED	
A	BAND 2	C	S3-7 REAR	2		-2		
A	BAND 3	C	S3-8 REAR	3		-3		
A	BAND 4	C	S3-9 REAR	4		-4		
A	BAND 5	C	S3-10 REAR	5		-5		
A	BAND 6	C	S3-11 REAR	6		-6		
A	BAND 7	C	S3-8 FRONT	7		-7		
A	BAND 8	C	S3-9 FRONT	8		-8		
A	BAND 9	C	S3-10 FRONT	9		-9		
A	A10890 BAND 10	C	S3-11 FRONT	10		-90		
B	A10890 CHAN 1	E	S5C-7 REAR	11		-1		
B	CHAN 2	E	S5C-8 REAR	12		-2		
B	CHAN 3	E	S5C-9 REAR	13		-3		
B	CHAN 4	E	S5C-10 REAR	14		-4		
B	CHAN 5	E	S5C-11 REAR	15		-5		
B	CHAN 6	E	S5C-12 REAR	16		-6		
B	CHAN 7	E	S5C-1 REAR	17		-7		
B	A10890 CHAN 8	E	S5C-2 REAR	18		-8		
D	CI42, RI2 JUNC	E	S5C-2 FRONT	19		MWC18(16)U-92	WIRE ELEC INSULATED	
				20				
				27	21	CU142-8	STRAP CABLE	
				1"	22	PX100-9-375	SLEEVING MARKED CA10629 C/W LATEST REV LETTER	
				23				

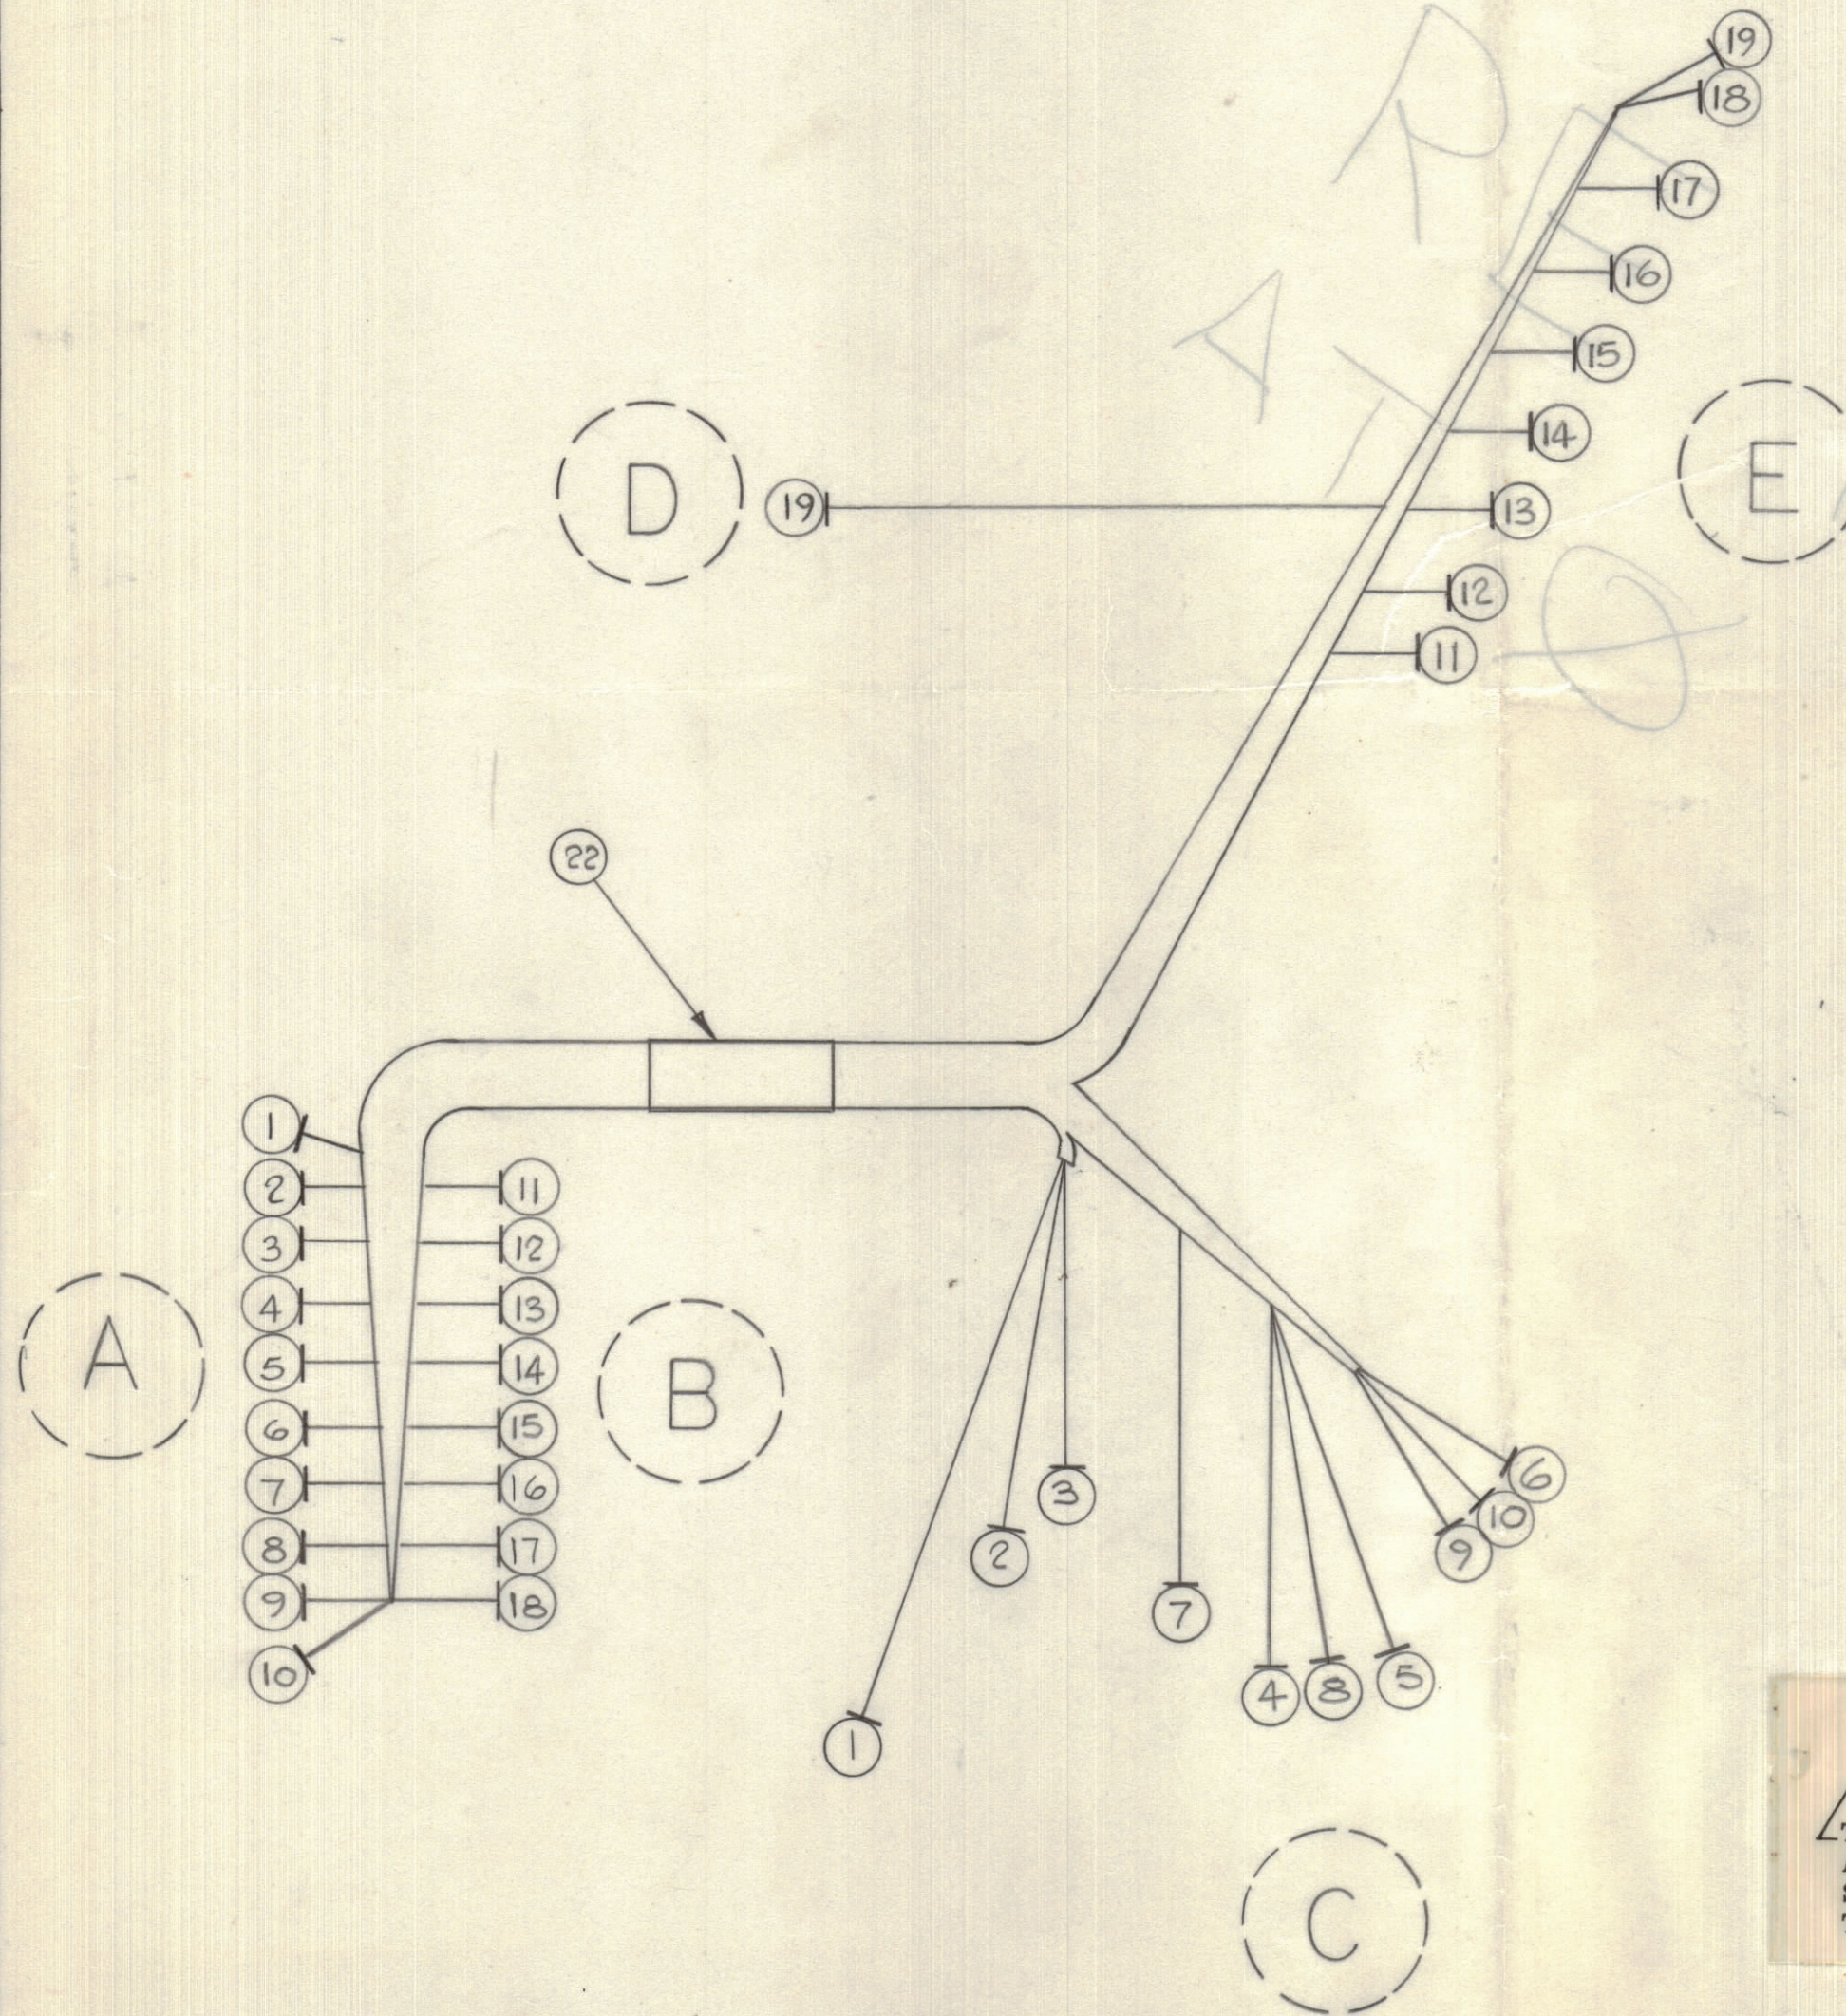

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 1/2" BEYOND THIS POINT AND TINNED 1/4" UNLESS OTHERWISE SPECIFIED.

CA10629 X

TOLERANCES		SCALE: 1:1
ALL OTHERS	DEC. DIM. ± 0.03 FRAC. DIM. ± 0.04 ANGULAR DIM. ± 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

MTR 100A	087/70	5 AUG 70
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE ASSY BAND	
TYPE & TEMPER		SIMPSON	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		CA10629 X	