


IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.		DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED					
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CN. NO.	DRAFTS	CHECKER	ENG. APP.
Ø		PROD. RELEASE	12 MAR 71		NAT		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

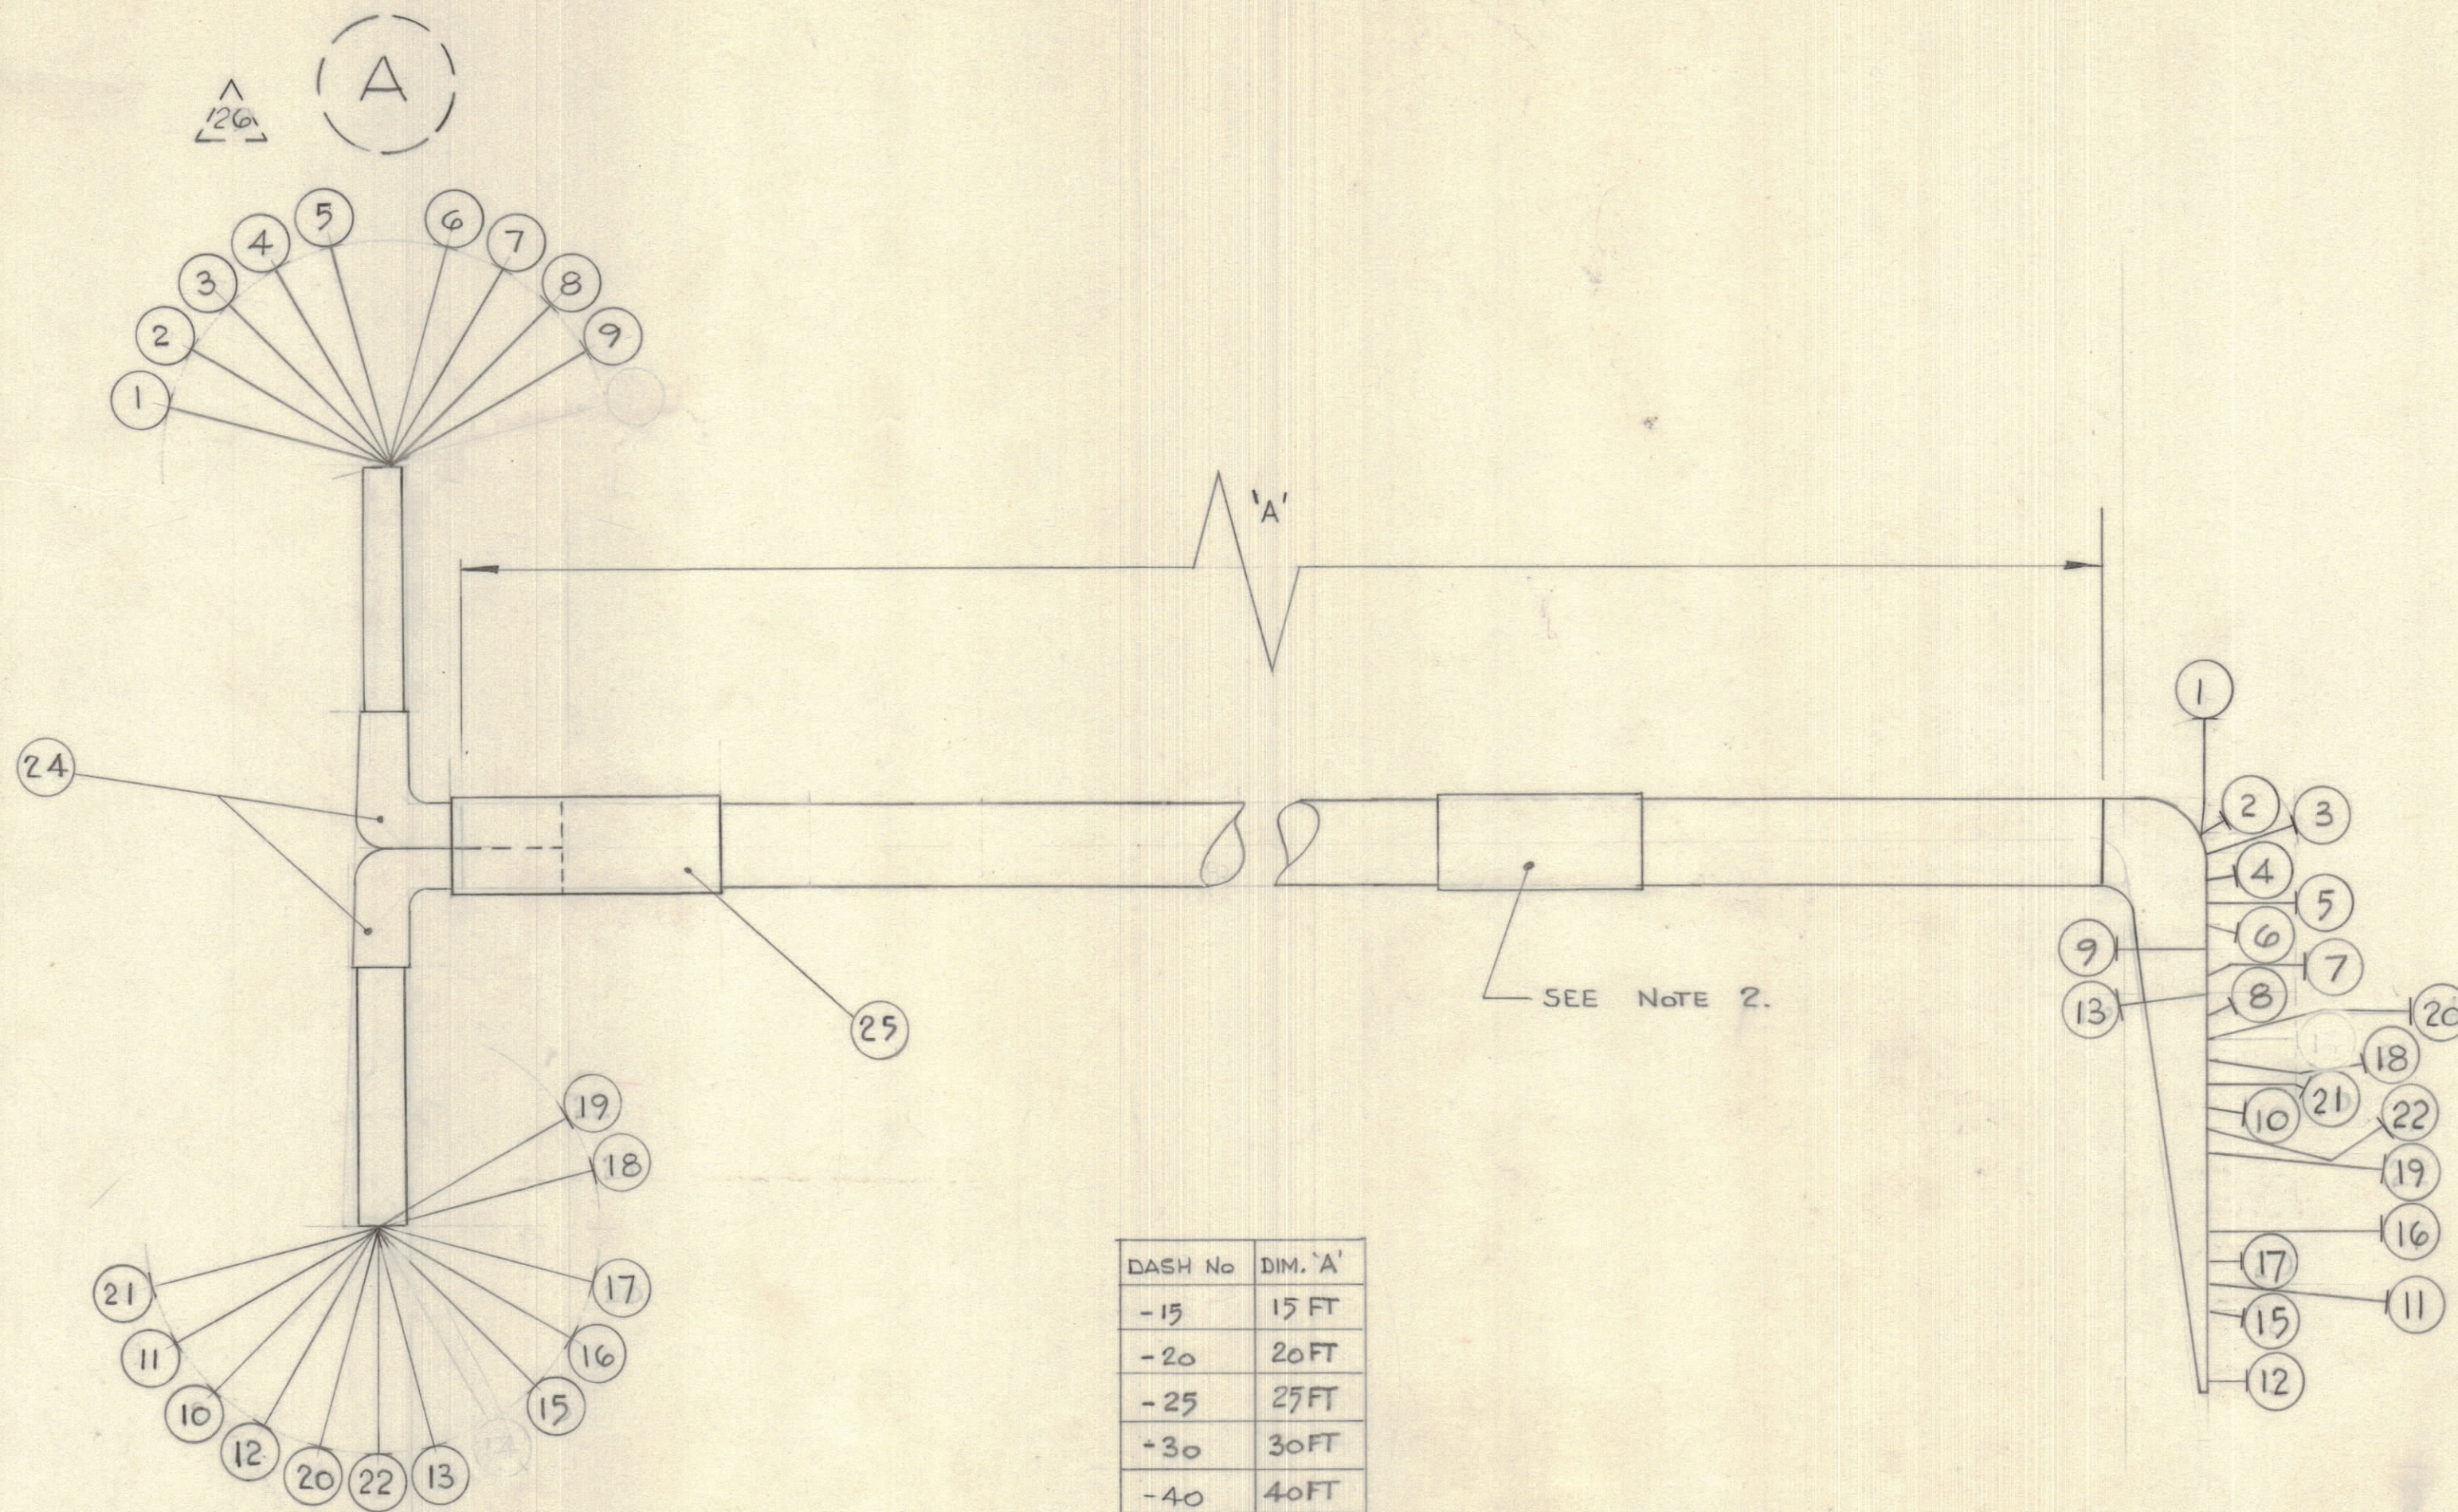

CA10632 Ø

DASH No	DIM. 'A'
-15	15 FT
-20	20 FT
-25	25 FT
-30	30 FT
-40	40 FT
-50	50 FT

TOLERANCES		SCALE: 1/1
ALL OTHERS	DEC. DIM. ± .XX	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.
	FRAC. DIM. ± 1/64	
	ANGULAR DIM. ± 0° 30'	

DCS-1	112/70	16 SEPT 70
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE ASSY	
WEIGHT PER PC.		MTR INTERCONNECT	
TYPE & TEMPER		PROCTOR	
HEAT TREAT. SPEC.		DRAWN	ELEC. DES. APP.
FINISH & SPEC. NO.		CHECKED	FINAL APPROVAL
		SHT 1 OF 2 CA10632 Ø	

IF IT IS FOUND DESIRABLE TO CHANGE ANY TOLERANCE OR OTHER DETAIL SPECIFIED ON THIS DRAWING NOTIFY THE PURCHASER PROMPTLY.						DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED	
MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND DEVIATIONS WILL BE CAUSE FOR REJECTION. REMOVE ALL BURRS AND SHARP EDGES.							
ISSUE	ITEM	CHANGED FROM	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
0		PROD RELEASE	12 MAR 77		NTT		

REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
------	------	----------	-------------	--------

ITEM	FROM		BKOUT	TO	COMPONENT	PART NO	DESCRIPTION	QTY
	COMPONENT	BKOUT						
1	A	J7-A	C	TBI-1	WI10013-G 0	CABLE PAIR SHIELDED	X	
2	A	J7-A	C	TBI-1	WI10013-G 2		X	
3	A	J7-B	C	2	WI10013-G 9		X	
4	A	J7-B	C	2	WI10013-G 0		X	
5	A	J7-C	C	3	WI10013-G 5		X	
6	A	J7-C	C	3	WI10013-G 0		X	
7	A	J7-D	C	4	WI10013-G 6		X	
8	A	J7-D	C	4	WI10013-G 0		X	
9	A	J7-E	C	5	WI10013-G 1		X	
10	B	J7-E	C	5	WI10013-G 0		X	
11	B	J7-F	C	6	WI10013-G 4		X	
12	B	J7-F	C	6	WI10013-G 0		X	
13	B	J7-G	C	7	WI10013-G 0		X	
14	B	J7-G	C	7	WI10013-G 3		X	
15	B	J7-H	C	8	WI10013-G 2		X	
16	B	J7-H	C	8	WI10013-G 5		X	
17	B	J7-I	C	-9	WI10013-G 2		X	
18	B	J7-I	C	-9	WI10013-G 9		X	
19	B	J7-J	C	14	WI10013-G 5		X	
20	B	J7-J	C	14	WI10013-G 1		X	
21	B	J7-K	C	24	WI10013-G 2		X	
22	B	J7-K	C	24	WI10013-G 1		X	
23	B	J7-L	C	26	WI10013-G 5		X	
24	B	J7-L	C	26	WI10013-G 1		X	
25	B	J7-M	C	10	WI10013-G 5		X	
26	B	J7-M	C	10	WI10013-G 1		X	
27	B	J7-N	C	11	WI10013-G 5		X	
28	B	J7-N	C	11	WI10013-G 1		X	
29	B	J7-O	C	22	WI10013-G 5		X	
30	B	J7-O	C	22	WI10013-G 1		X	
31	B	J7-P	C	19	WI10013-G 6		X	
32	B	J7-P	C	19	WI10013-G 2		X	
33	B	J7-Q	C	20	WI10013-G 4		X	
34	B	J7-Q	C	20	WI10013-G 2		X	
35	B	J7-R	C	13	WI10013-G 2		X	
36	B	J7-R	C	13	WI10013-G 3		X	
37	B	J7-S	C	15	WI10013-G 5		X	
38	B	J7-S	C	15	WI10013-G 3		X	
39	B	J7-T	C	30	WI10013-G 5		X	
40	B	J7-T	C	30	WI10013-G 3		X	
41	B	J7-U	C	12	WI10013-G 5		X	
42	B	J7-U	C	12	WI10013-G 4		X	
43	B	J7-V	C	TBI-12	WI10013-G 4	CABLE PAIR SHIELDED	X	
44	B	J7-V	C	TBI-12	PX100-1	SLEEVING	X	
45	B	J7-W	C		PX 830-2-1	SLEEVING HEAT SHRINK	X	
46	B	J7-W	C		PX 830-500-1	SLEEVING HEAT SHRINK	X	
47	B	J7-X	C		MS3106A-20-279	CONNECTOR	1	
48	B	J7-X	C		MS3106A-28-16P	CONNECTOR	1	

CA10G32 \emptyset

- THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED $\frac{1}{2}$ BEYOND THIS POINT AND TINNED $\frac{1}{4}$ UNLESS OTHERWISE SPECIFIED.
- ITEM 23 TO BE MARKED CA10G32 C/W LATEST REVISION LETTER.

TOLERANCES		SCALE: —
ALL OTHERS	DEC. DIM. \pm .XX*.01 FRAC. DIM. \pm $\frac{1}{64}$ ANGULAR DIM. \pm 0° 30'	DRILL, PUNCH, COMMERCIAL STOCK SIZES AND MANUFACTURERS TOLERANCES ARE NOT INCLUDED.

DCS-1	112/70	28 SEPT.
MODEL	PROJECT NO.	DATE

STOCK SIZE		TMC (Canada) LIMITED OTTAWA ONTARIO	
MATERIAL		CABLE ASSY	
WEIGHT PER PC.		MTR INTERCONNECT	
TYPE & TEMPER		PROCTOR	
HEAT TREAT. SPEC.		CHECKED	FINAL APPROVAL
FINISH & SPEC. NO.		SHT 2 OF 2	CA10G32 \emptyset