


**OBSOLETE**  
 NO LONGER REQ.

NOTE:  
 \* LENGTH EXPRESSED  
 IN INCHES

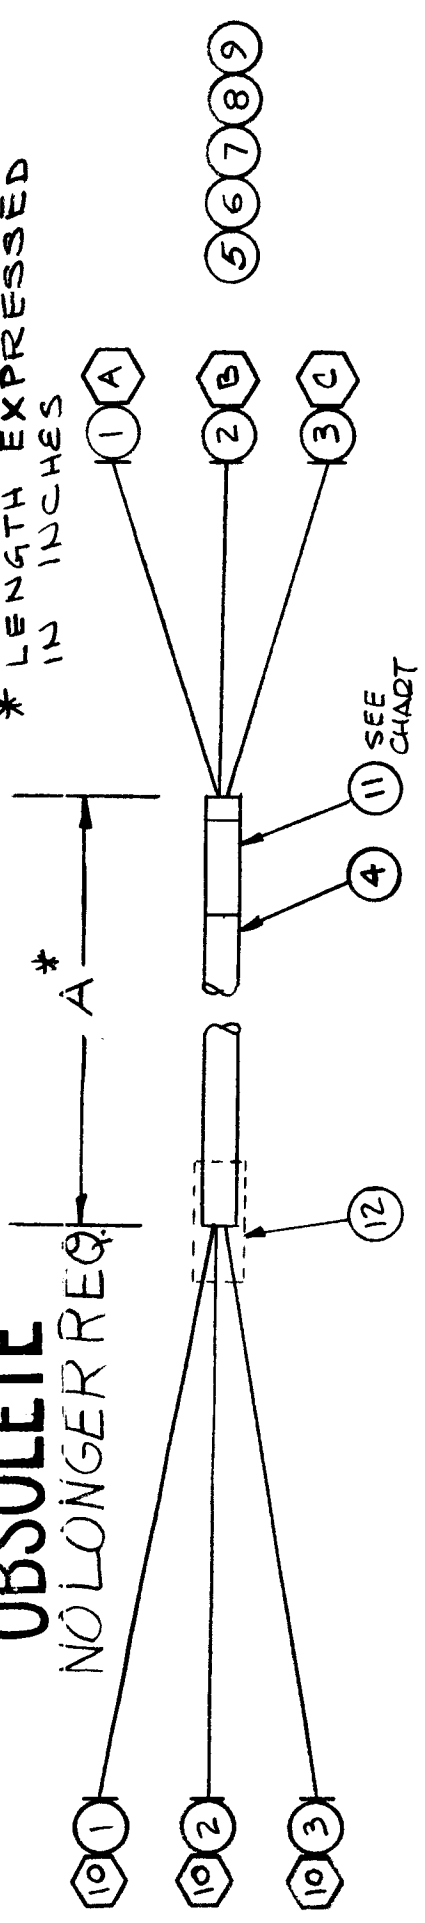

TMC P/N	A*	ITEM	⑪
CA1100-1	95	LA107-20 - P6016	-1
-2	130	↑	-2
-3	95	↑	-3
-4	130	↑	-4
-5	95	↑	-5
-6	130	↑	-6
-7	95	↑	-7
CA1100-8	130	LA107-20 - P6016	-8

X 15	BS100	SOLDER, SOFT TIN ALLOY	
X 14	CD101-1-MW	CORD, LACING	
X 13	TA100-1	TAPE, ELECTRICAL	
1	PX830-10-1	SLEEVE, INSULATION SHRINK	
1	SEE CHART	MARKER, WIRE	
3	PL242-3	CONNECTOR PLUG TAPER PIN	
1	PL212-7	CONNECTOR PLUG	
1	MS3420-12A	BUSHING, RUBBER	
1	↑ 8A	↑	
1	↓ 6A	↓	
1	MS3420-4A	BUSHING, RUBBER	
4	PX100-1-166	INSULATION SLEEVE	
3	MWC20(7)U9	CABLE INSULATED	
2	MWC20(7)U6	CABLE INSULATED	
1	MWC20(7)U2	CABLE INSULATED	
REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL

STURMER		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
CABLE ASSY S.P. 3/C		MCGA-1 CONTERS	
M. STURMER	2-30-65	QCB	QCB
DRAWN	CHECKED	FINAL APPROVAL	CA1100 A
TYPE & TEMPER	HEAT TREAT. SPEC.	FINISH & SPEC. NO.	ELEC. DES. APP. HGH. DES. APP.
15426	MS	1/9/65	4/2/65
14426	MS	1/9/65	4/2/65
DESCRIPTION	DATE	CH. NO.	DRAFTS
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	SCALE	CHECKER	ENG. APP.
TOLERANCES	FRACTIONS		
.X ± .05	± 1/64		
.XX ± .01	ANGLES		
.XXX ± .005	± 0° 30'		