


○ DENOTES ITEM No.
 △ DENOTES PIN. No.

TMC P/N	DIM "A"	ITEM 17	ITEM 18
CA1150 - 1	50"	LA107-20-P101	LA107-20-P8503

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

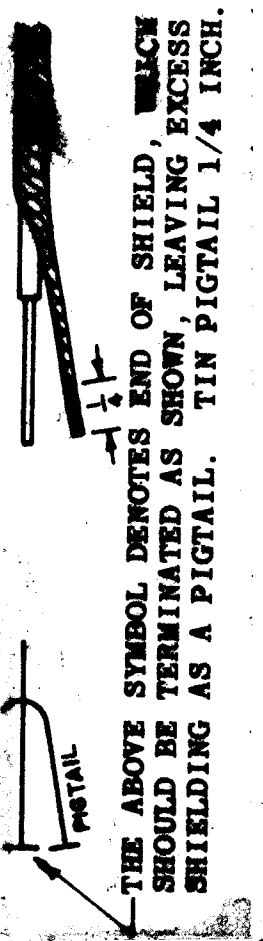

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

CA1150

REVISIONS

SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X1	CABLE SPECS ADDED	7-16-65		JC		
Ø	ORIGINAL RELEASE FOR PRODUCTION	7-19-65		A.V.V.		

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
	X 21	BS100	SOLDER, TIN ALLOY	
	X 20	TA100-1	INSULATION, TAPE, ELECT. PLASTIC	
	X 19	CD101-1MW	CORD, NYLON, LACING	
	1 18	SEE CHART	SLEEVE, MARKER, CABLE	
	1 17	SEE CHART	SLEEVE, MARKER, CABLE	
	2 16	MS3420-12A	BUSHING, RUBBER	
	2 15	MS3420-8A	BUSHING, RUBBER	
	2 14	MS3420-6A	BUSHING, RUBBER	
	2 13	PL-212-3	CONNECTOR, PLUG 24 PIN MALE	
		12	PX100-1-375	INSULATOR, SLEEVING SZ 3/8
		11	MWC24(7) U 0	WIRE, ELEC., INSULATED
		10	SJ 90	CABLE, S/P, SHLD/JKT
		9		
		8		
		7		
		6		
		5		
		4		
		3		
		2		
	1	MWC24(7) SJ1	CABLE, S/P, SHLD/JKT	

LIST OF MATERIAL

MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK			
FINISH		TITLE CABLE ASSY, SP 11/c			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN M.H. STURMER DATE 6-9-65	FINAL APPROVAL DATE 7/19/65	DATE 7/19/65	
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		TOLERANCES ± 1/64 ANGLES ± 0° 30'		ELECT. DES. DATE 7-16-65	CA1150 Ø
		MECH. DES. DATE		SHEET REV. LTR.	

NOTES

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.