


REQ. PER UNIT	1
MODEL	KIT 180
ASSY. NO.	
DATE	5 JAN 66
USED ON	CA1207

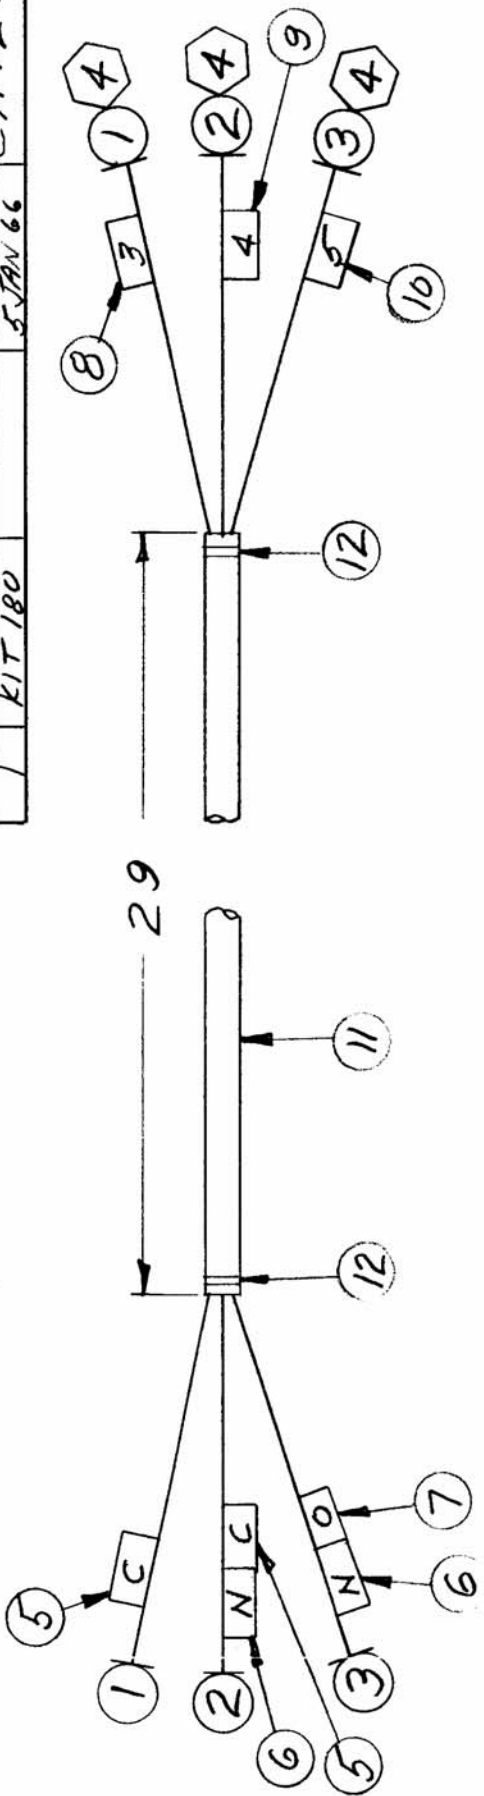

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 13	BS 100	SOLDER, TIN ALY	
X 12	CD 101-1AW	CD, NYLON, LACING	
11	PX 100-1-208	INS SILV	
10	LA 101-5	BAND, MARKER, CBL	
9	LA 101-4	BAND, MARKER, CBL	
8	LA 101-3	BAND, MARKER, CBL	
7	LA 101-0	BAND, MARKER, CBL	
6	LA 101-N	BAND, MARKER, CBL	
5	LA 101-C	BAND, MARKER, CBL	
4	TE 120-2	TERM., LUG-SPADE NO. 6	
3	MWC 20(7)U 3	WIRE, ELEC, INS	
2	MWC 20(7)U 1	WIRE, ELEC, INS	
1	MWC 20(7)U 6	WIRE, ELEC, INS	

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

STOCK SIZE	
MATERIAL	
TYPE & TEMPER	HEAT TREAT. SPEC.
FINISH & SPEC. NO.	
ELEC. DES. APP.	MECH. DES. APP.
DRAWN	CHECKED
DATE	2/2/66
CH. NO.	
DRAFTS	CHECKER
DATE	2/2/66
SCALE	
DESCRIPTION	ORIGINAL RELEASE
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	
TOLERANCES	FRACTIONS
.XX ± .01	± 1/64
.XXX ± .005	ANGLES ± 0° 30'
SYMBOL	DESCRIPTION
	THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK
	CABLE, SPECIAL PURPOSE
	APPROVED
	CA1207