


REQ. PER UNIT	1
MODEL	KIT 180
ASSY. NO.	
DATE	5 JAN 66
USED ON	CA1213

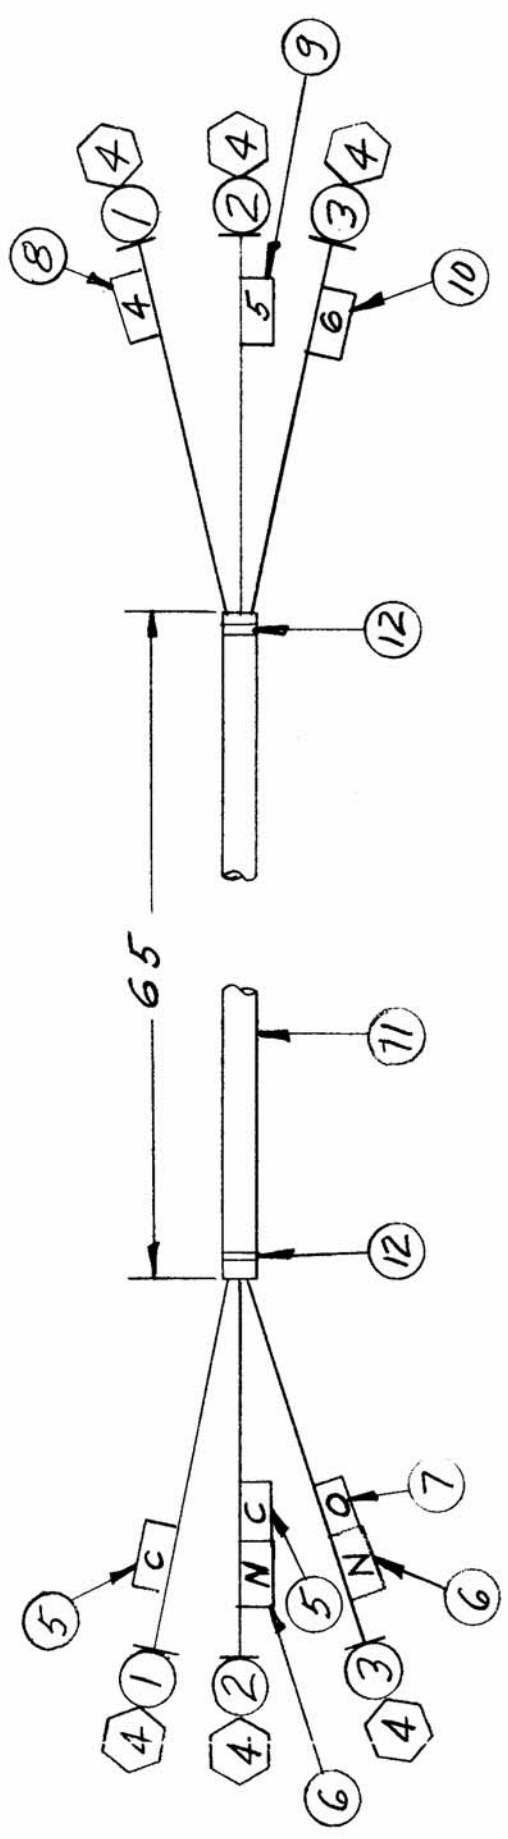

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
13	CD101-1MW	CD, NYLON, LACING	
12	PX100-1-208	INS SLVG	
11	LA101-6	BAND, MARKER, CBL	
10	LA101-5	BAND, MARKER, CBL	
9	LA101-4	BAND, MARKER, CBL	
8	LA101-0	BAND, MARKER, CBL	
7	LA101-N	BAND, MARKER, CBL	
6	LA101-C	BAND, MARKER, CBL	
5	TE/20-2	TERM., LUG-SPADE NO. 6	
4	MWC20(7)U3	WIRE, ELEC, INS	
3	MWC20(7)U91	WIRE, ELEC, INS	
2	MWC20(7)U3	WIRE, ELEC, INS	
1			

THE TECHNICAL MATERIEL CORP.  
MAMARONECK, NEW YORK

CABLE, SPECIAL PURPOSE

DATE	2/2/66	CHECKED	<i>[Signature]</i>
DRAWN		MECH. DES. APP.	<i>[Signature]</i>
TYPE & TEMPER		ELEC. DES. APP.	<i>[Signature]</i>
HEAT TREAT. SPEC.		MECH. DES. APP.	<i>[Signature]</i>
MATERIAL		FINAL APPROVA	<i>[Signature]</i>
FINISH & SPEC. NO.			CA1213

SYM	DESCRIPTION	DATE	CH. NO.	DRAFTS	CHECKER	ENG. APP.
Ø	ORIGINAL RELEASE	2/2/66				<i>[Signature]</i>
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES						
TOLERANCES						
DECIMALS	FRACTIONS					
.X ± .05	± 1/64					
.XX ± .01	ANGLES					
.XXX ± .005	± 0° 30'					