


REVISIONS					
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	APPD
Ø		ORIGINAL RELEASE FOR PROD	6/6/67	Ø	<i>[Signature]</i>

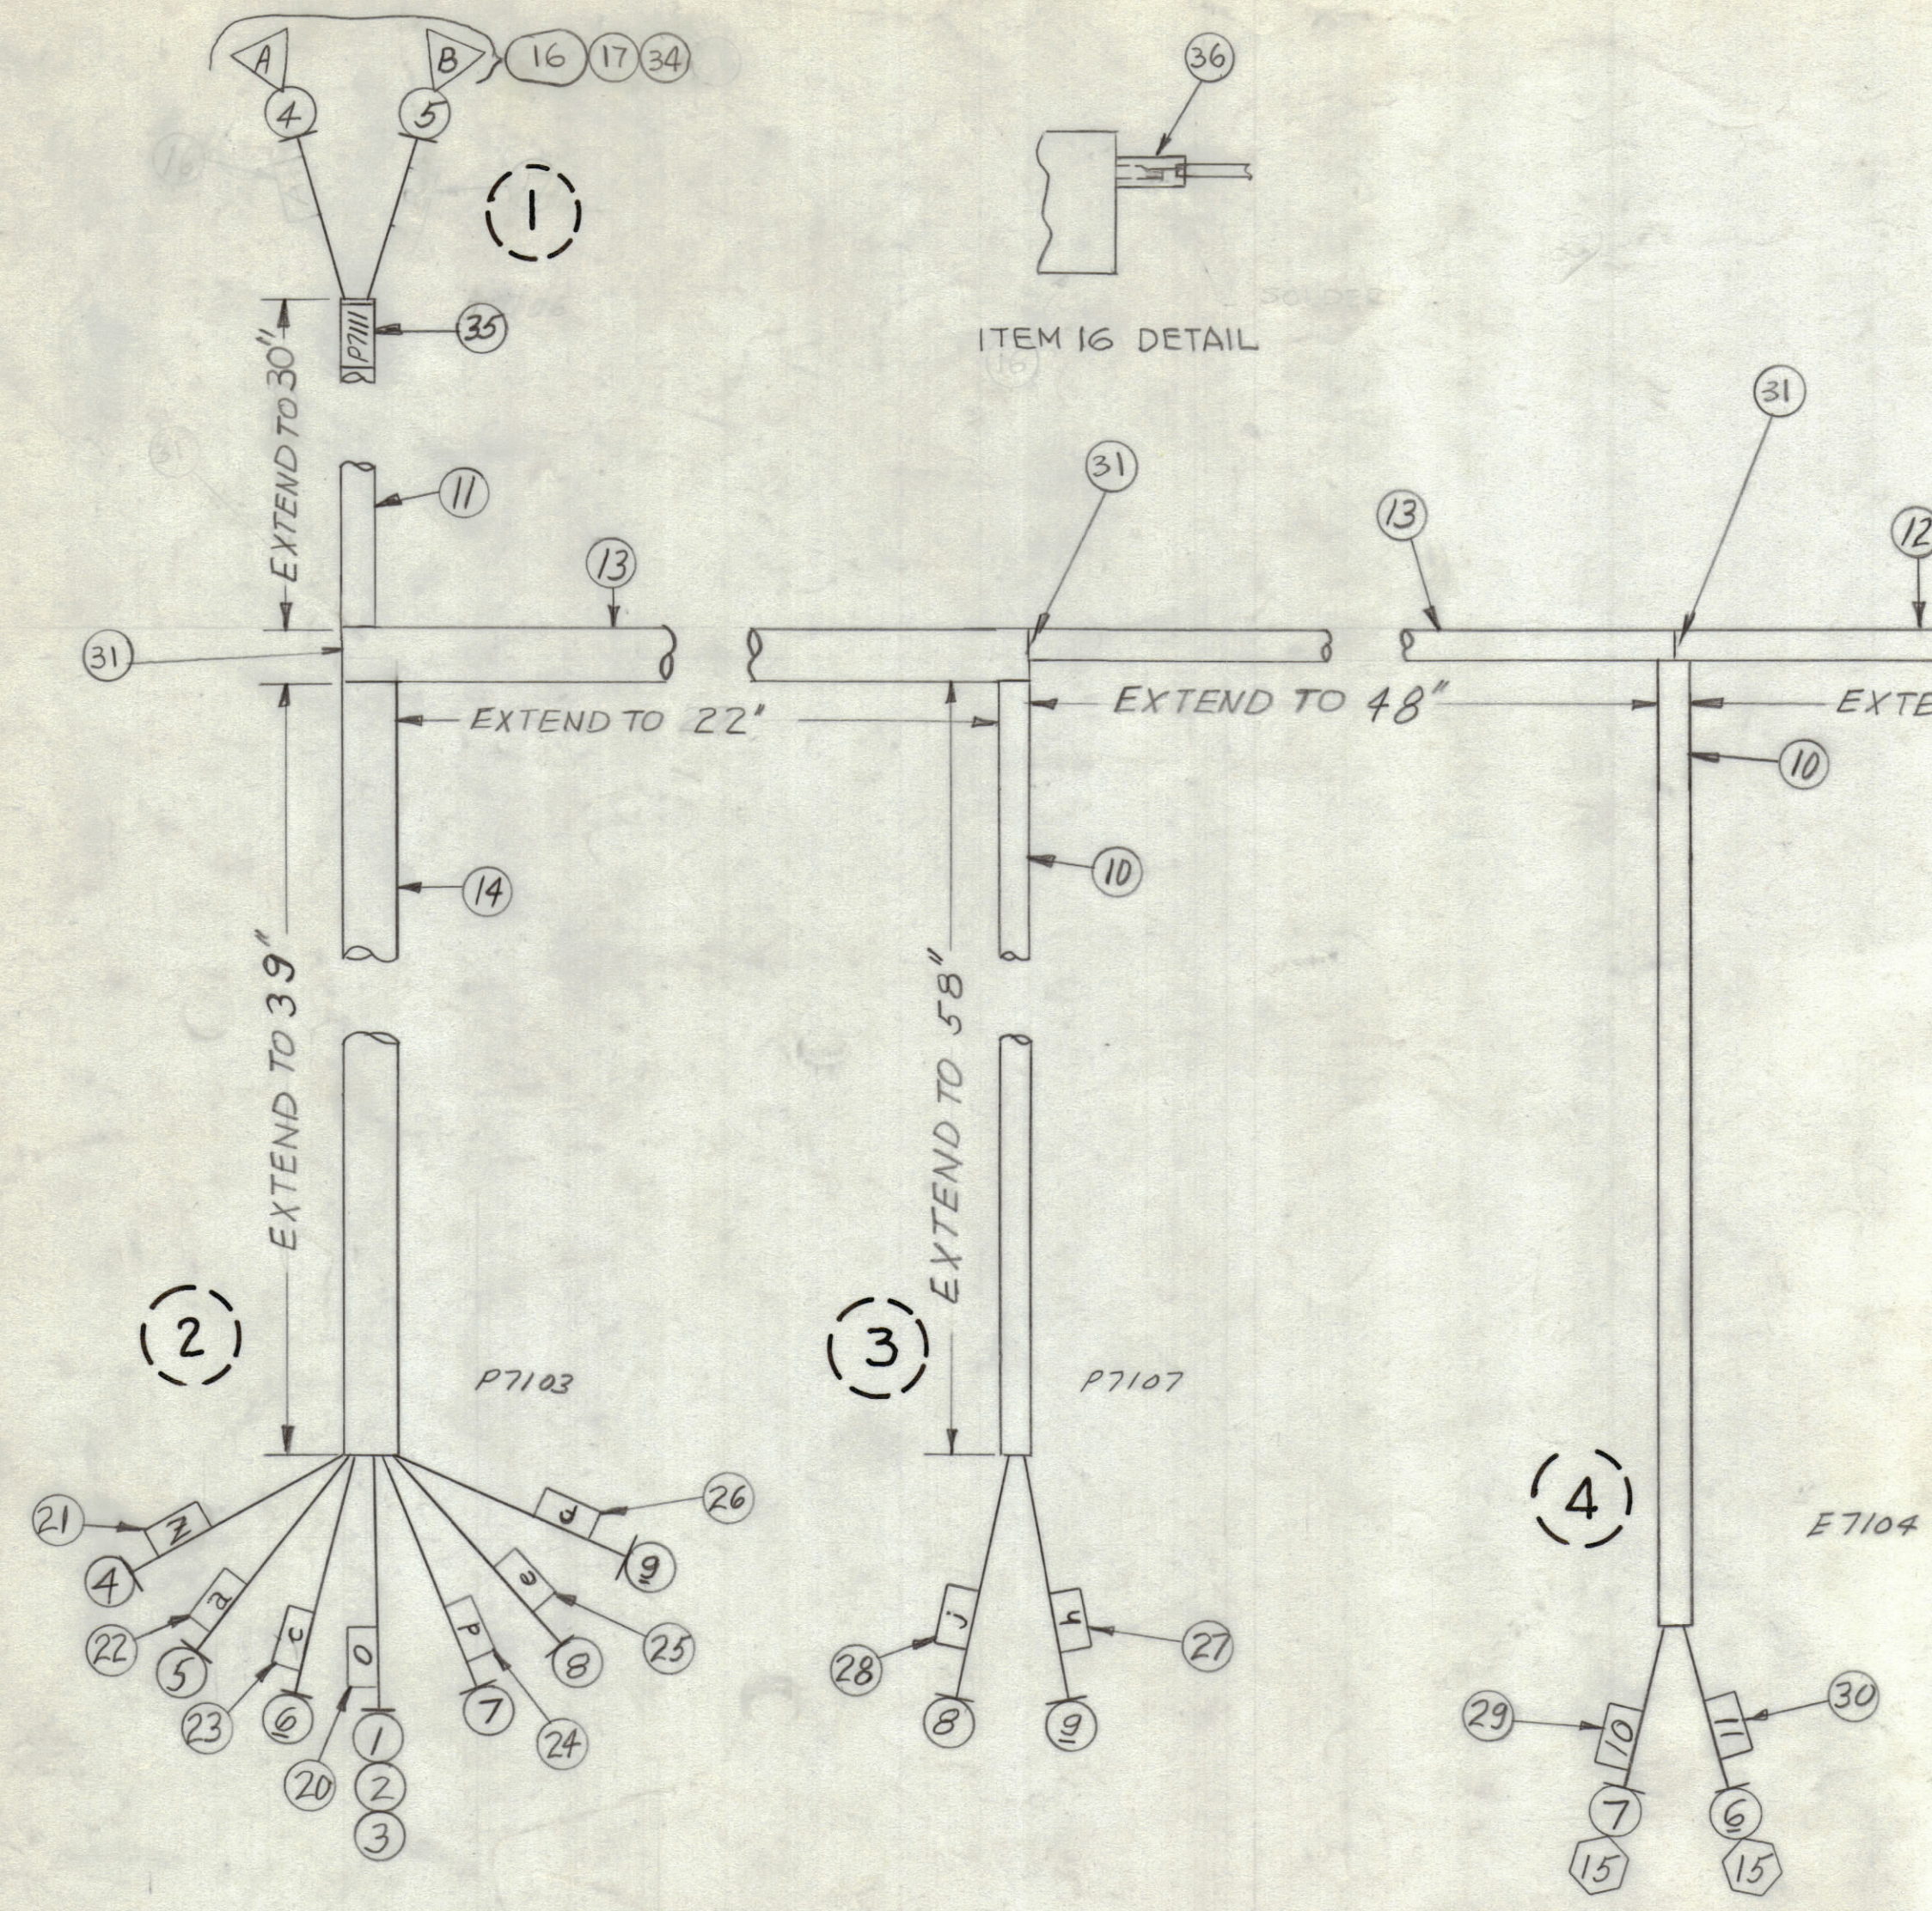

CA1218-Ø

REQ	ITEM	PART NO.	BREAKOUT		DESTINATION OR DESCRIPTION			
			FROM	TO	FROM	TO		
	1	MWC16 (19)U 8	2	5	P7103	PIN O	P7104	PIN B
	2	MWC16 (19)U 8	2	5	P7103	↑	P7104	↑ L
	3	MWC16 (19)U 8	2	5		↑	P7104	↑ N
	4	MWC18 (16)U 90	2	1		↑	P7111	↑ A
	5	MWC18 (16)U 0	2	1		↑	P7111	↑ B
	6	MWC20 (7)U 91	2	4		↑	E7104	TERM. 11
	7	MWC20 (7)U 2	2	4		↑	E7104	TERM. 10
	8	MWC20 (7)U 7	2	3		↑	P7107	PIN J
	9	MWC20 (7)U 93	2	3	P7103	PIN f	P7107	PIN h
	10	PX100-1-166						
	11	-208						
	12	-234						
	13	-294						
	14	PX100-1-330						
2	15	TE120-2						
1	16	MS3106A-14S-2S						
1	17	MS3057-6						
1	18	LA101-L						
1	19	-N						
1	20	-O						
1	21	-Z						
1	22	-a						
1	23	-c						
1	24	-d						
1	25	-e						
1	26	-f						
1	27	-h						
1	28	-j						
1	29	-10						
1	30	LA101-11						
X	31	TA100-1						
X	32	CD101-1MW						
X	33	BS100						
1	34	MS3420-6A						
1	35	LA107-12 P7111						
	36	PX100-1-106						
1	37	LA101-B						

- ~ SYMBOL DENOTES ~
- = ITEM No.
 - ⬡ = LUGS
 - ▽ = PIN No.
 - = MARKERS No. (REF LA101)
 - (with lines) = CONNECTOR
 - (with dashed lines) = BREAKOUT

UNLESS OTHERWISE SPECIFIED
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
 AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION
 AND NAIL DRIVING POINT. WIRE MUST BE
 STRIPPED 3/4" BEYOND THIS POINT AND
 TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

NOTES

1		KIT 180	
QTY./UNIT	MODEL USED ON	ASSY. NO.	
SCALE	CODE		
1:1			

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE WIRING HARNESS BRANCHED	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN	DATE
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			DATE	DATE
FRACTIONS ± 1/64 ANGLES ± 0° 30'			DATE	DATE
TOLERANCES			DATE	DATE
			DATE	DATE