


CA1227


REVISIONS

| SYM | DESCRIPTION                     | DATE    | E.M.N. NO. | DRAFT | CHKD | APPD |
|-----|---------------------------------|---------|------------|-------|------|------|
| Ø   | ORIGINAL RELEASE FOR PRODUCTION | 2-24-66 | —          | Jc    | JCS  | JLQ  |

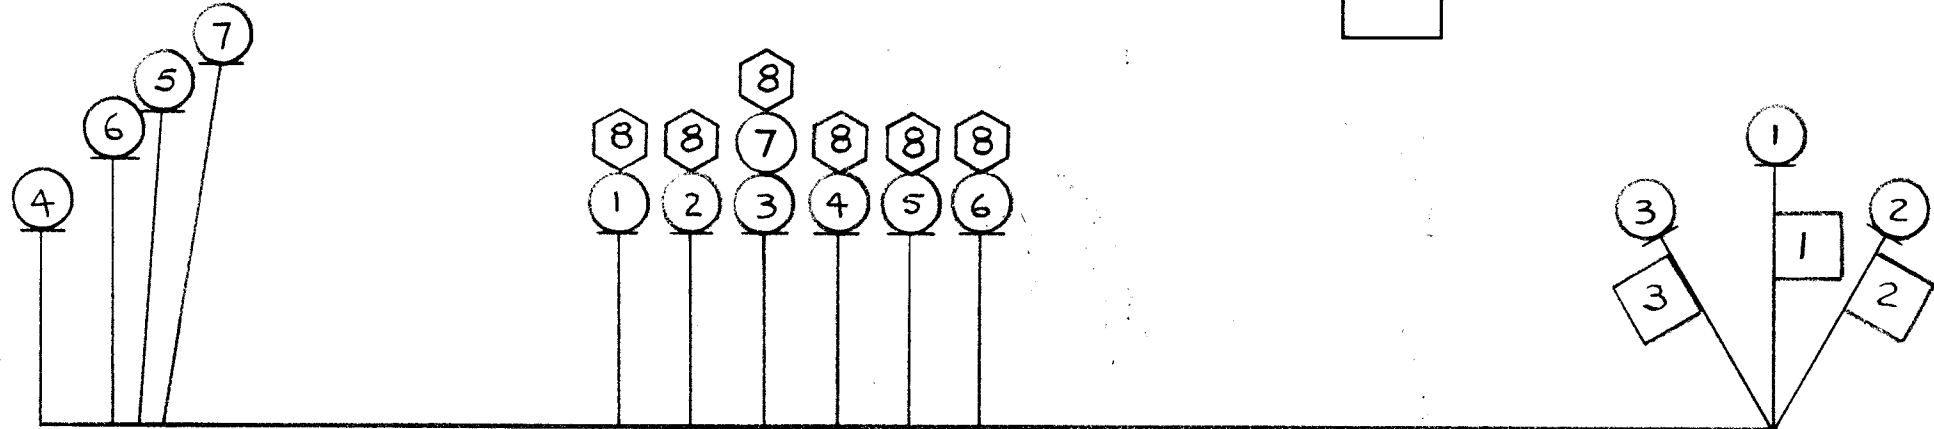

UNLESS OTHERWISE SPECIFIED  
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE  
AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
  2. ALL SHIELDED CABLES
  3. ALL OTHERS
- SPACE LACING APPROXIMATELY 3/4" APART.



THIS SYMBOL DENOTES END OF INSULATION  
AND NAIL DRIVING POINT. WIRE MUST BE  
STRIPPED 3/4" BEYOND THIS POINT AND  
TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

○ DENOTES ITEM NO.

⬡ DENOTES LUG

| LA101 CHART |     |
|-------------|-----|
| QUAN        | NO. |
| 1           | 1   |
| 1           | 2   |
| 1           | 3   |

| 3      | 11   | LA101       | BAND, MARKER, CBL |        |
|--------|------|-------------|-------------------|--------|
| X      | 10   | BS100       | SOLDER, TIN ALY   |        |
| X      | 9    | CD101-1MW   | CD, NYLON, LACING |        |
| 6      | 8    | TE120-2     | TERM., LUG-SPADE  |        |
|        | 7    | MWC22(7)U9  | WIRE, ELEC, INS.  |        |
|        | 6    | MWC22(7)U0  |                   |        |
|        | 5    |             | 95                |        |
|        | 4    |             | 5                 |        |
|        | 3    |             | 9                 |        |
|        | 2    |             | 96                |        |
|        | 1    | MWC22(7)U6  | WIRE, ELEC, INS   |        |
| REQ'D. | ITEM | PART NUMBER | DESCRIPTION       | SYMBOL |

STURMER

LIST OF MATERIAL

|   |  |  |   |   |                 |
|---|--|--|---|---|-----------------|
| MATERIAL  |  | THE TECHNICAL MATERIEL CORP.<br>MAMARONECK, NEW YORK |   |   |                 |
| FINISH  |  | TITLE<br>WIRING HARNESS, BRANCHED                    |   |   |                 |
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES AND INCLUDE<br>CHEMICALLY APPLIED OR PLATED FINISHES |  | DRAWN<br>M.H. STURMER<br>CHECKED<br>JCS              | DATE<br>2-21-66<br>DATE<br>2-23-66<br>DATE<br>2-23-66 | FINAL APPROVAL<br>M.H. Sturmer<br>DATE<br>2/23/66 | DATE<br>2/23/66 |
| DECIMALS<br>.X ± .05<br>.XX ± .01<br>.XXX ± .005  | TOLERANCES<br>± 1/64<br>ANGLES<br>± 0° 30' | ELECT. DES.<br>MECH. DES.                            |   | CA1227  | Ø               |
|   |  | SHEET<br>M/L 48                                      |   | REV. LTR.   |                 |

| 1   | AX625         |            |
|---|---------------|------------|
| Q'TY./UNIT  | MODEL USED ON | ASS'Y. NO. |
| SCALE   | CODE          |            |
| THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY<br>OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR<br>REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN. |               |            |

NOTES