


THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.



CA1234

REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
Ø	ORIGINAL RELEASE FOR PRODUCTION	4/20/66		C.V.		<i>[Signature]</i>

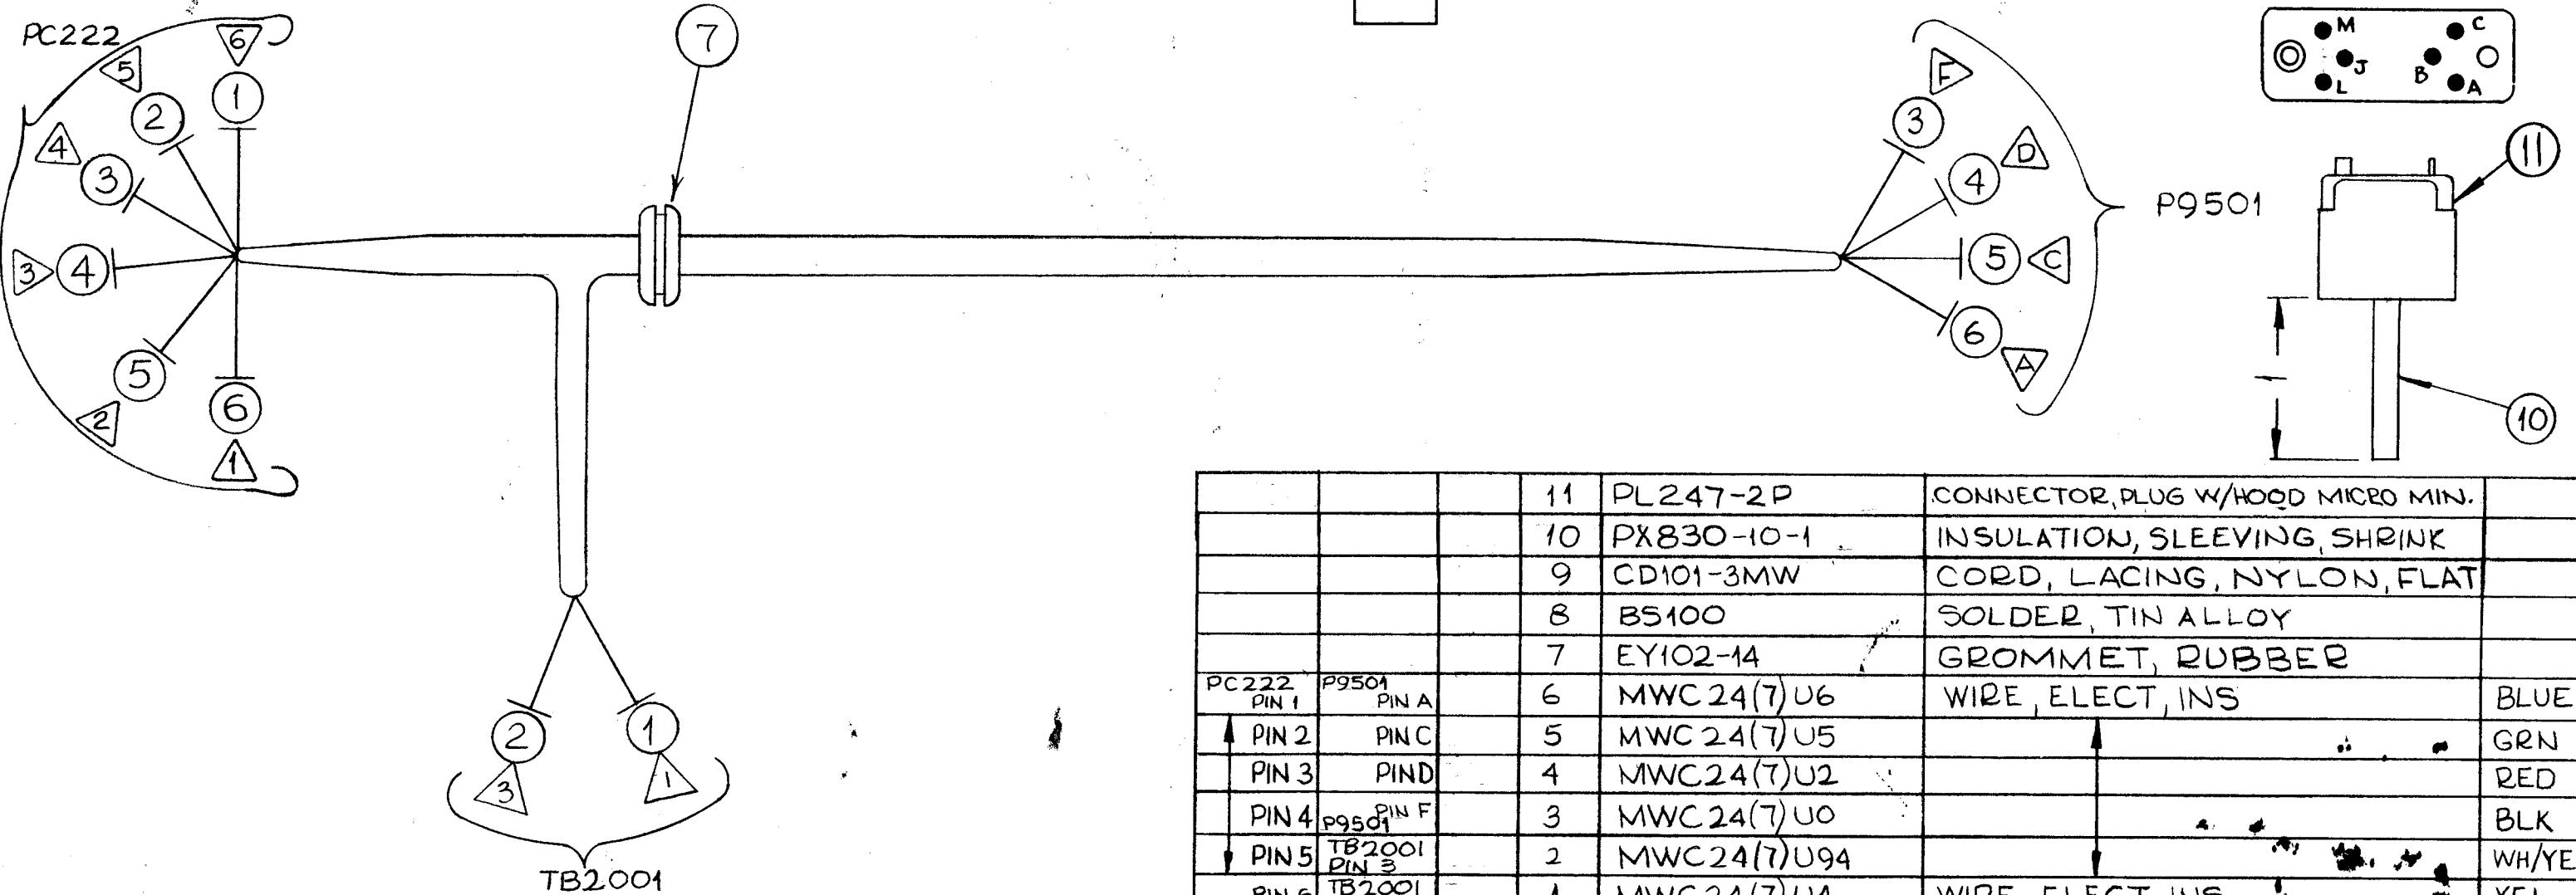


FROM	TO	REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
			11	PL247-2P	CONNECTOR, PLUG W/HOOD MICRO MIN.	
			10	PX830-10-1	INSULATION, SLEEVING, SHRINK	
			9	CD101-3MW	CORD, LACING, NYLON, FLAT	
			8	BS100	SOLDER, TIN ALLOY	
			7	EY102-14	GROMMET, RUBBER	
PC222 PIN 1	P9501 PIN A		6	MWC24(7)U6	WIRE, ELECT, INS	BLUE
↑ PIN 2	PIN C		5	MWC24(7)U5		GRN
PIN 3	PIN D		4	MWC24(7)U2		RED
PIN 4	P9501 PIN F		3	MWC24(7)U0		BLK
↓ PIN 5	TB2001 PIN 3		2	MWC24(7)U94		WH/YEL
PC222 PIN 6	TB2001 PIN 1		1	MWC24(7)U4	WIRE, ELECT, INS	YEL

UNLESS OTHERWISE SPECIFIED
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
 AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.



NOTES

RTIH-1	
Q'TY./UNIT	MODEL USED ON
SCALE 1/1	CODE
ASS'Y. NO.	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

EATON		LIST OF MATERIAL	
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH		TITLE WIRING HARNESS, BRANCHED	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN <i>[Signature]</i>	DATE 4-6-66
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005		CHECKED <i>[Signature]</i>	DATE 4-11-66
FRACTIONS ± 1/64 ANGLES ± 0° 30'		ELECT. DES. <i>[Signature]</i>	DATE 4/11/66
TOLERANCES		MECH. DES.	DATE
		FINAL APPROVAL <i>[Signature]</i> DATE 4/20/66	
		CA1234	
		SHEET	
		REV. LTR.	

M/LA. KLEIN 4/12/66