


REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	A	COMPLETELY REV. & REDRAWN	6/21/72	20741	GE	EP EP

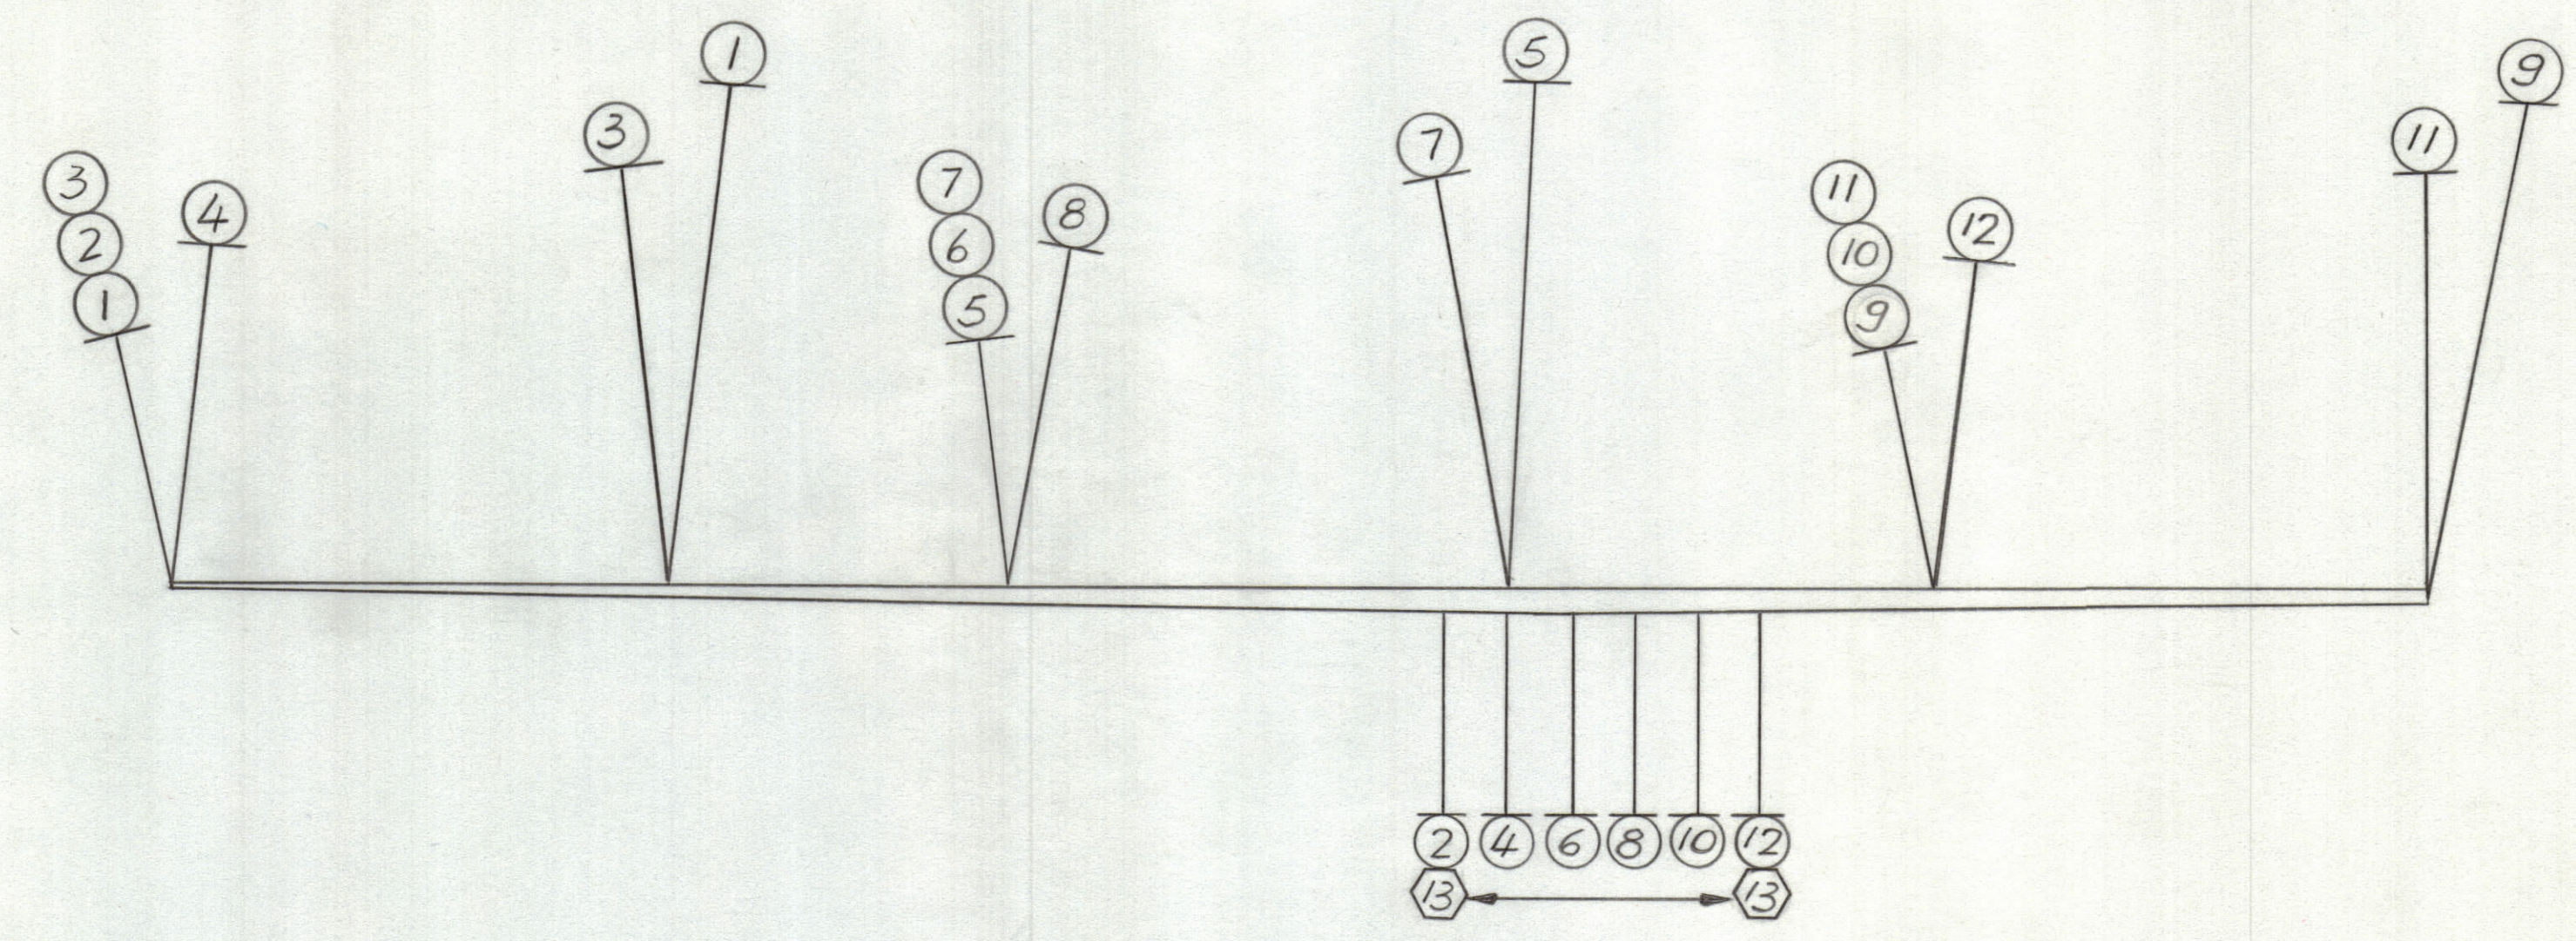

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

DENOTES ITEM  
 DENOTES LUG

UNLESS OTHERWISE SPECIFIED  
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.  
 1. ALL R.F. CABLES  
 2. ALL SHIELDED CABLES  
 3. ALL OTHERS  
 SPACE LACING APPROXIMATELY 3/4" APART.

14	CD101-1MW	CORD, LACING	
13	TE120-2	LUG, TERMINAL	
12	MWC22(7)U96	WIRE, INSULATED	
11		96	
10		6	
9		6	
8		95	
7		95	
6		5	
5		5	
4		92	
3		92	
2		2	
1	MWC22(7)U2	WIRE, INSULATED	

QTY. REQ.	ITEM	PART NO.	DESCRIPTION	SYMBOL
F. BUDETTI LIST OF MATERIAL				
FINAL APPROVAL		DATE		
MECH. DES.		DATE		
ELECT. DES.		DATE		
CHECKED		DATE		
DRAWN		DATE		
G.E.		6/21/72		
<b>THE TECHNICAL MATERIEL CORP.</b> MAMARONECK, NEW YORK				
CABLE ASSY.				
SIZE	CODE	IDENT. NO.	DWG NO.	ISSUE
C	82679		CA 1241	A
SCALE			SHEET	OF

1	LSP-8A	
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES	
TOLERANCES ON	
DECIMALS	FRACTIONS
.X ± .05	± 1/64
.XX ± .01	ANGLES
.XXX ± .005	± 0° -30'
MATERIAL	
FINISH	

CA 1241 A B

A