
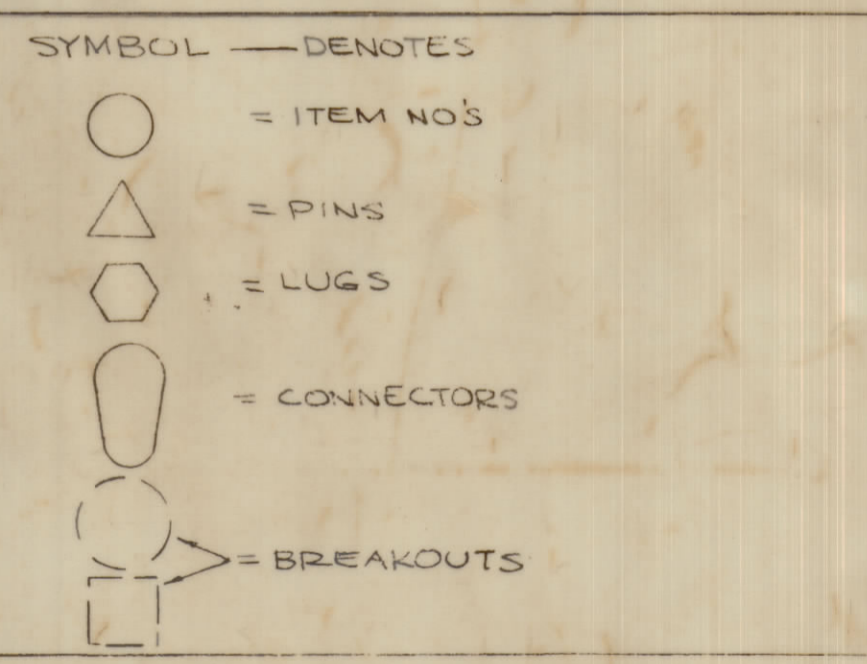



REVISIONS							
ZONE	SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPR
X		EXPERIMENTAL RELEASE	7-20-66	X			
X1		ITEM 56 ON BRKOUT 5 RELOCATED TO BRKOUT 6	8-4-66	M	Jc		
X2		ITEM 68 ADDED ON BRKOUT 3 '5'x'44' RELOCATED	8-20-66	KL	DL		
X3		ITEM 30 WAS MWC 22(7)UB12	9-1-66	X3			
X4		ADDED ITEM 69	1-23-67	X4			
X5		ADDED ITEM 70	3-6-67	X5	RME		
		ORIGINAL RELEASE FOR PRODUCTION	3-20-67		L.A.H.		
A		ITEM 71 ADDED, IT 27 WAS PING, IT 56 WAS PIN 7	12-19-68	18679	NE		FB

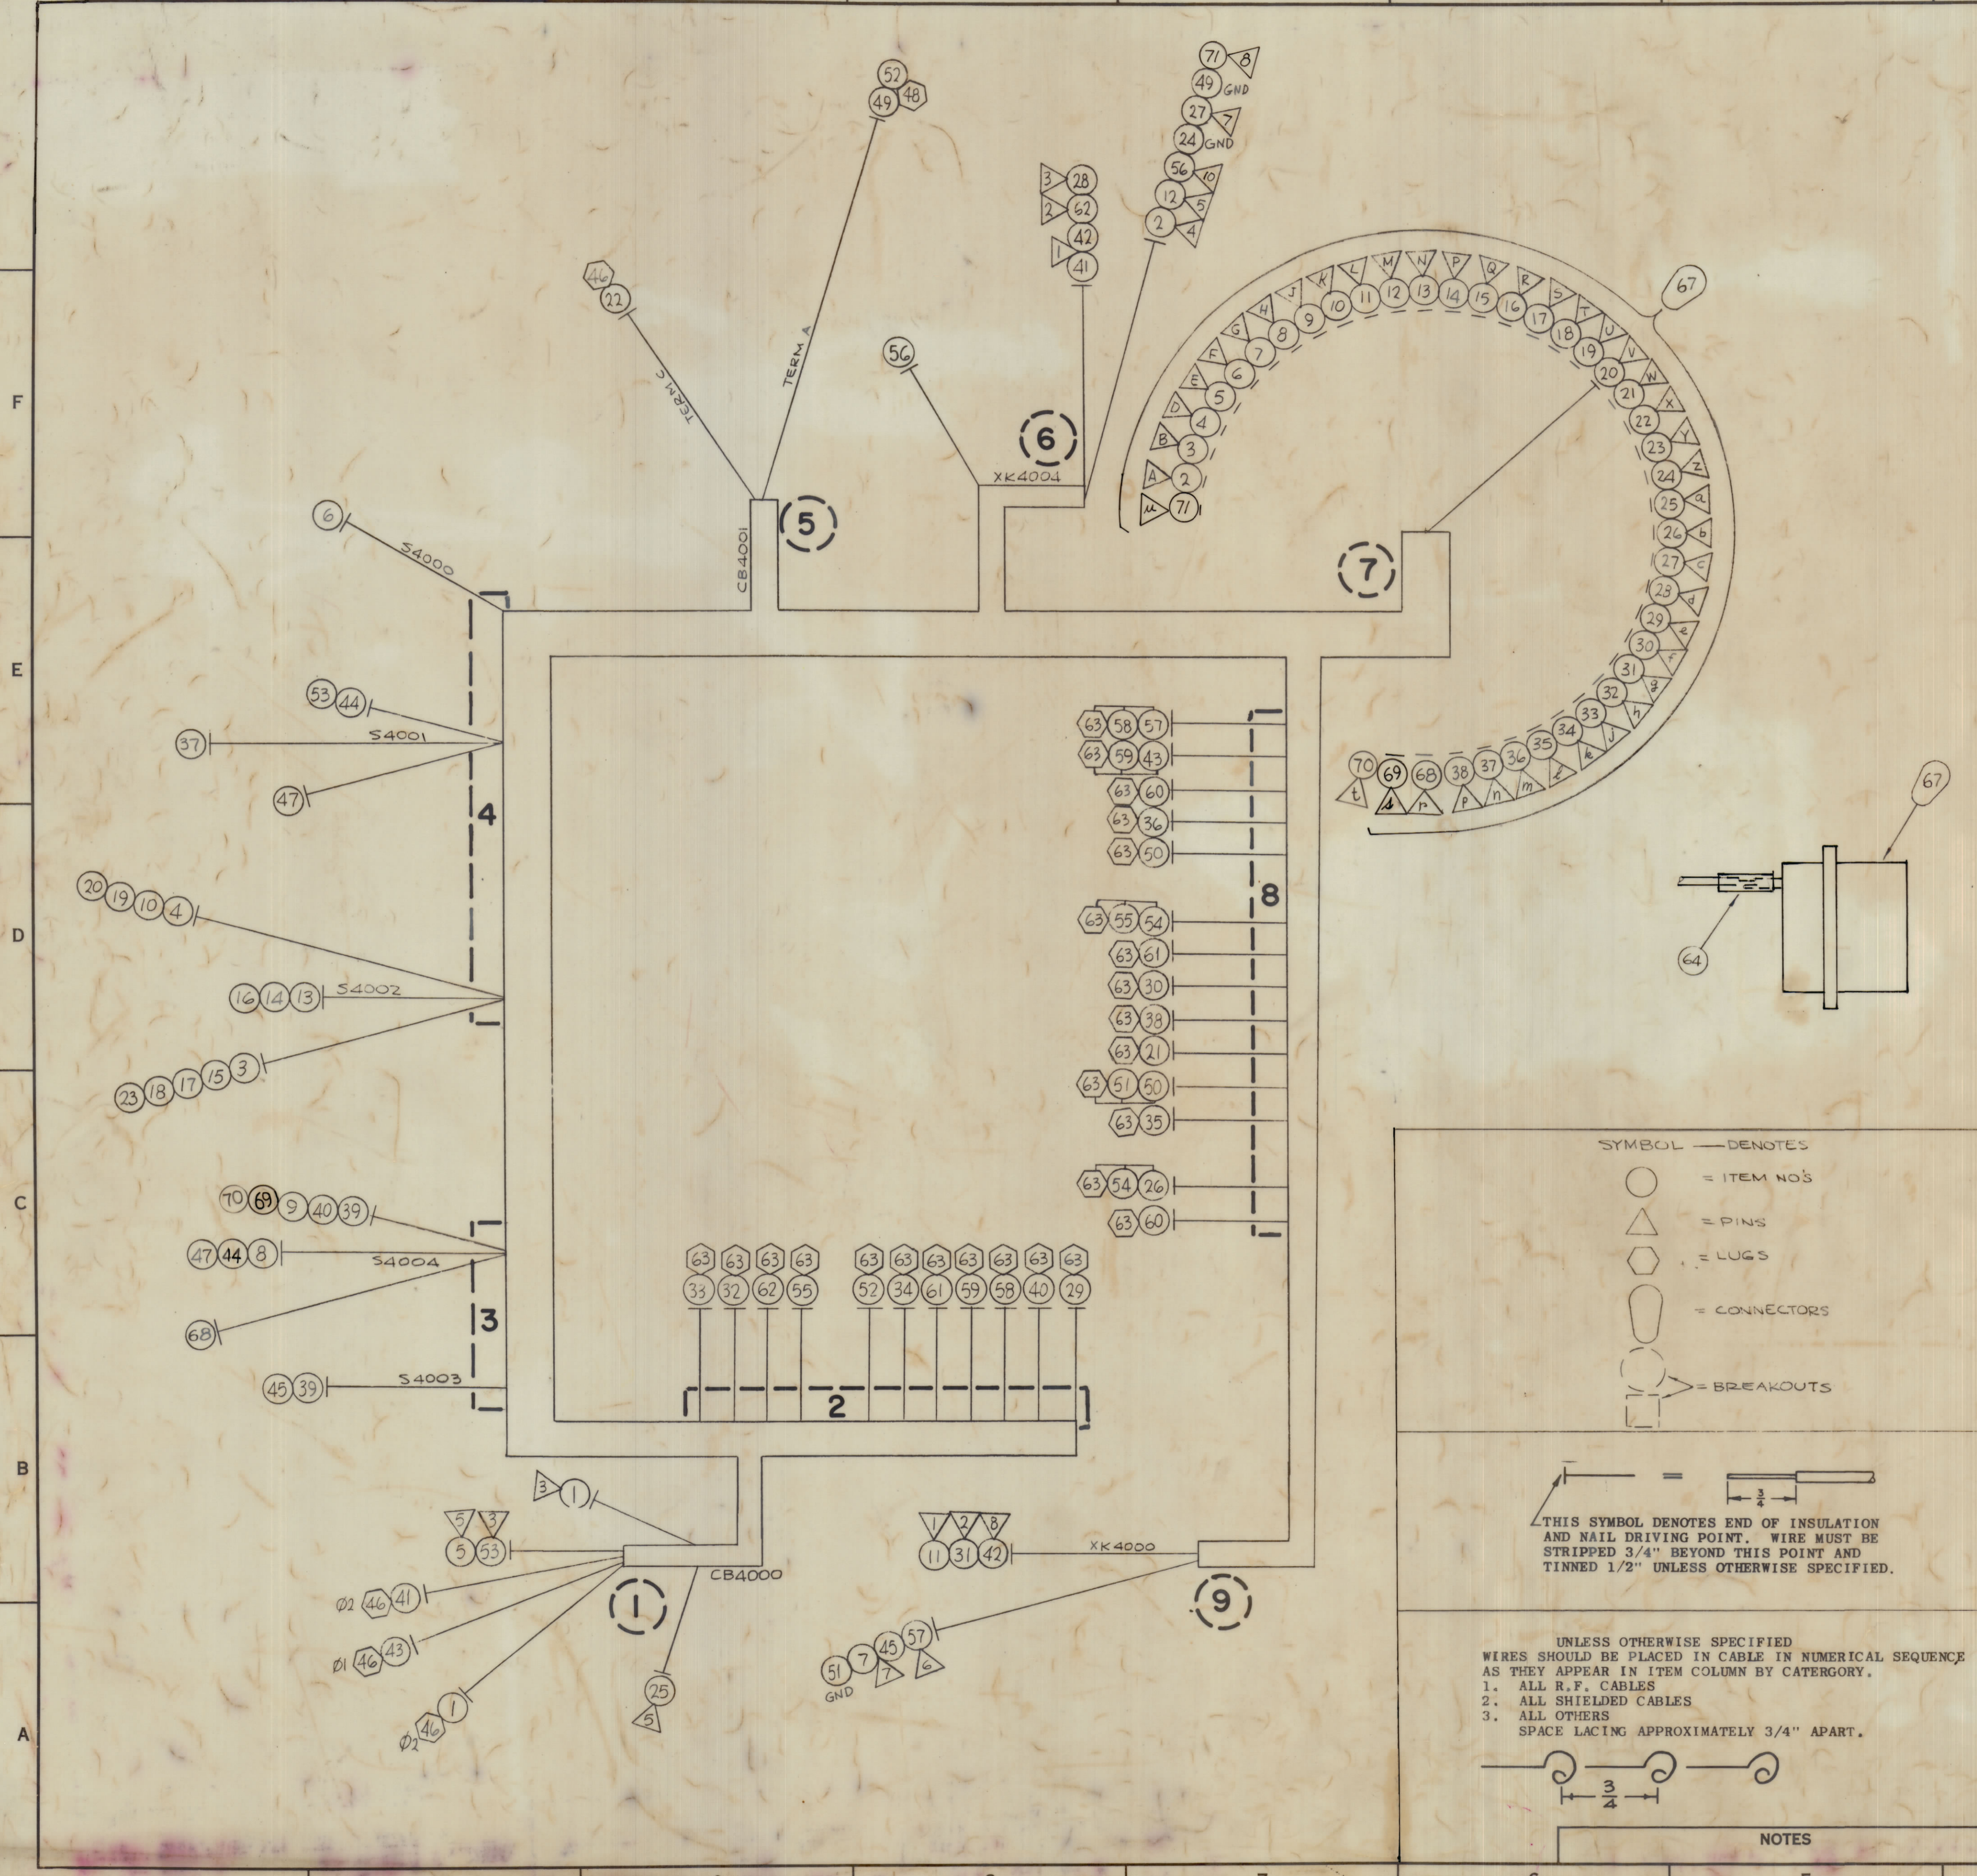

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

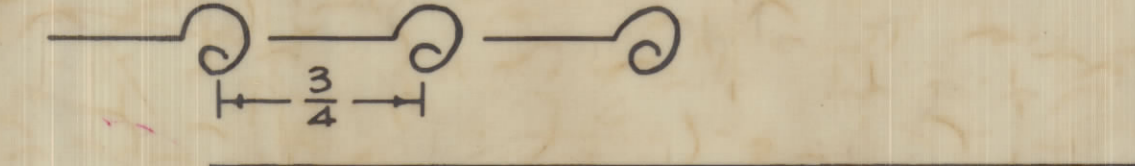

**NOTES**

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

QTY/UNIT	MODEL USED ON	ASBY NO.
SCALE 1:1	CODE A	

REC'D	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F BUDETTI LIST OF MATERIAL				
MATERIAL				
FINISH				
THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK				
TITLE CABLE, BRANCHED				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES				
SCALE	1:1	CODE	A	ASBY NO.
DECIMALS	1.2 ± .05	FRACTIONS	± 1/64 ANGLES ± 0° 30'	
TOLERANCES	XXX ± .008			
DRAWN		DATE	7-20-66	FINAL APPROVAL
CHECKED		DATE		
ELECT. DESG.		DATE		
MECH. DES.		DATE		
CA1256				A
SHEET				REV. LTR.

CA1256 A



REQ ITEM	PART NUMBER	BREAKOUT		DESTINATION OR DESCRIPTION	
		FROM	TO	FROM	TO
1	MWC22(7)U98	1	1	CB4000 Ø2 LINE,	CB4000 AUX SWITCH
2	MWC22(7)U1	6	7	J4001 PIN A	XK4004 PIN 4
3	U2	4	1		S4002 POS. 12
4	U3	4	1		S4002 POS. 7
5	U4	1	1		CB4000 PIN 5
6	U5	4	1	F	AUX. SWITCH
7	U6	9	1	G	S4000
8	U91	3	1	H	XK4000 PIN 7
9	U92	3	1	J	S4004 WIPER
10	U93	4	1	K	S4004 WIPER
11	U94	9	1	L	S4002 POS. 8
12	U964	6	1	M	XK4000 PIN 1
13	U95	4	1	N	XK4004 PIN 5
14	U96	4	1	P	S4002 POS. 3
15	U97	1	1	Q	S4002 POS. 1
16	U98	1	1	R	S4002 POS. 10
17	U90	1	1	S	S4002 POS. 2
18	U834	1	1	T	S4002 POS. 4
19	U845	1	1	U	S4002 POS. 5
20	U856	4	1	V	S4002 POS. 6
21	U900	8	1	W	S4002 POS. 9
22	U913	5	1	X	E4000 TERM 6
23	U914	4	1	Y	CB4001 TERM C
24	UO	6	1	Z	S4002 POS. 11
25	U915	1	1	a	XK4004 GND
26	U916	8	1	b	CB4000 PIN 5
27	U917	6	1	c	AUX. SWITCH
28	MWC22(7)U918	6	1	d	E4000 TERM 2
29	MWC22(7)U922	2	1	e	XK4004 PIN 7
30	MWC22(7)U912	8	1	f	XK4004 PIN 3
31	MWC20(7)U901	9	1	g	E4001 TERM 12
32	HWC22(7)U5	2	1	h	E4000 TERM 8
33	HWC22(7)U95	2	1	i	XK4000 PIN 2
34	MWC22(7)U925	2	1	j	E4001 TERM 2
35	U926	8	1	k	E4001 TERM 1
36	U932	8	1	l	E4001 TERM 7
37	U942	4	1	m	E4000 TERM 4
38	U944	4	1	n	E4000 TERM 13
39	UO	3	7	J4001 PIN p	S4001 ON
40	MWC22(7)UO	2	3	S4003	E4000 TERM 7
41	MWC20(7)U8	1	3	E4001 TERM 11	S4004
42	MWC20(7)U8	6	6	CB4000 Ø2 LOAD	S4004
43	MWC22(7)U9	1	9	XK4004 PIN 1	XK4004 PIN 1
44	MWC22(7)UO	3	8	CB4000 Ø1 LOAD	XK4000 PIN 8
45	MWC22(7)U6	3	4	S4004	E4000 TERM 15
46	TE-156-32952	3	9	XK4000 PIN 7	S4001
47	MWC22(7)U91	3	4	TERM. LUG, SPADE	S4003
48	TE-156-34149	1	4	S4004 WIPER	TERMINAL
49	MWC22(7)UO	5	6	CB4001 TERM A	S4001 WIPER
50	MWC22(7)UO	8	8	E4000 TERM 12	TERMINAL
					XK4004 GND
					E4000 TERM 5



REQ ITEM	PART NUMBER	BREAKOUT		DESTINATION OR DESCRIPTION	
		FROM	TO	FROM	TO
51	MWC22(7)U0	8	9	E4000 TERM 5	XK4000 GND
52	U0	2	5	E4001 TERM 6	CB4001 TERM A
53	U0	1	4	CB4000 PIN 3 AUX. SWITCH	S4001
54	U916	8	8	E4000 TERM 2	E4000 TERM 10
55	U916	2	8	E4000 TERM 10	E4001 TERM 4
56	MWC22(7)U2	6	6	CR4000	XK4004 PIN 10
57	MWC22(7)U98	8	9	XK4000 PIN 2	E4000 TERM 16
58	U98	2	8	E4000 TERM 16	E4001 TERM 10
59	U9	2	8	E4000 TERM 15	E4001 TERM 9
60	U900	8	8	E4000 TERM 1.	E4000 TERM 14
61	U900	2	8	E4000 TERM 9	E4001 TERM 8
62	MWC22(7)U900	2	6	E4001 TERM 3	XK4004 PIN 2
25	TE-120-2			TERM. LUG. SPADE	TERMINAL
64	PX-100-1-118			INS. SLVG. ELECT.	
65	CD101-1MW			CORD, NYLON,	LACING
66	BS-100			SOLDER TIN,	ALLOY
67	MS 3102A-32-414P			CONNECTOR, RECEPT	ML
68	MWC 22(7)U946	3	7	S4004	J4001 PIN P
69	MWC 22(7)U954	3	7	S4004	J4001 PIN A
70	MWC22(7)U955	3	7	S4004	J4001 PIN t
71	MWC 22(7)U853	6	7	XK4004 PINS	J4001 PIN u
72					
73					
74					
75					