


REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X4	REVISED & UPDATED	4-27-64	X4			
X5	ITEM 18 WAS ON BREAKOUT 5, IT 72 ADDED	4-11-64	X5			
X6	ITEM 83 & 76 ADDED	12-11-64	X6			
X7	ITEM 10 WAS FROM BREAKOUT 8 TO 11, PIN 10	4-4-67	X7			
Ø	ORIGINAL RELEASE FOR PRODUCTION	7/1/67	Ø			
A	ITEM 76 WAS EAS60P27-050	4-23-68	18889			FB
B	ITEM 84 & 85 ADDED	1-13-69	19185			FB

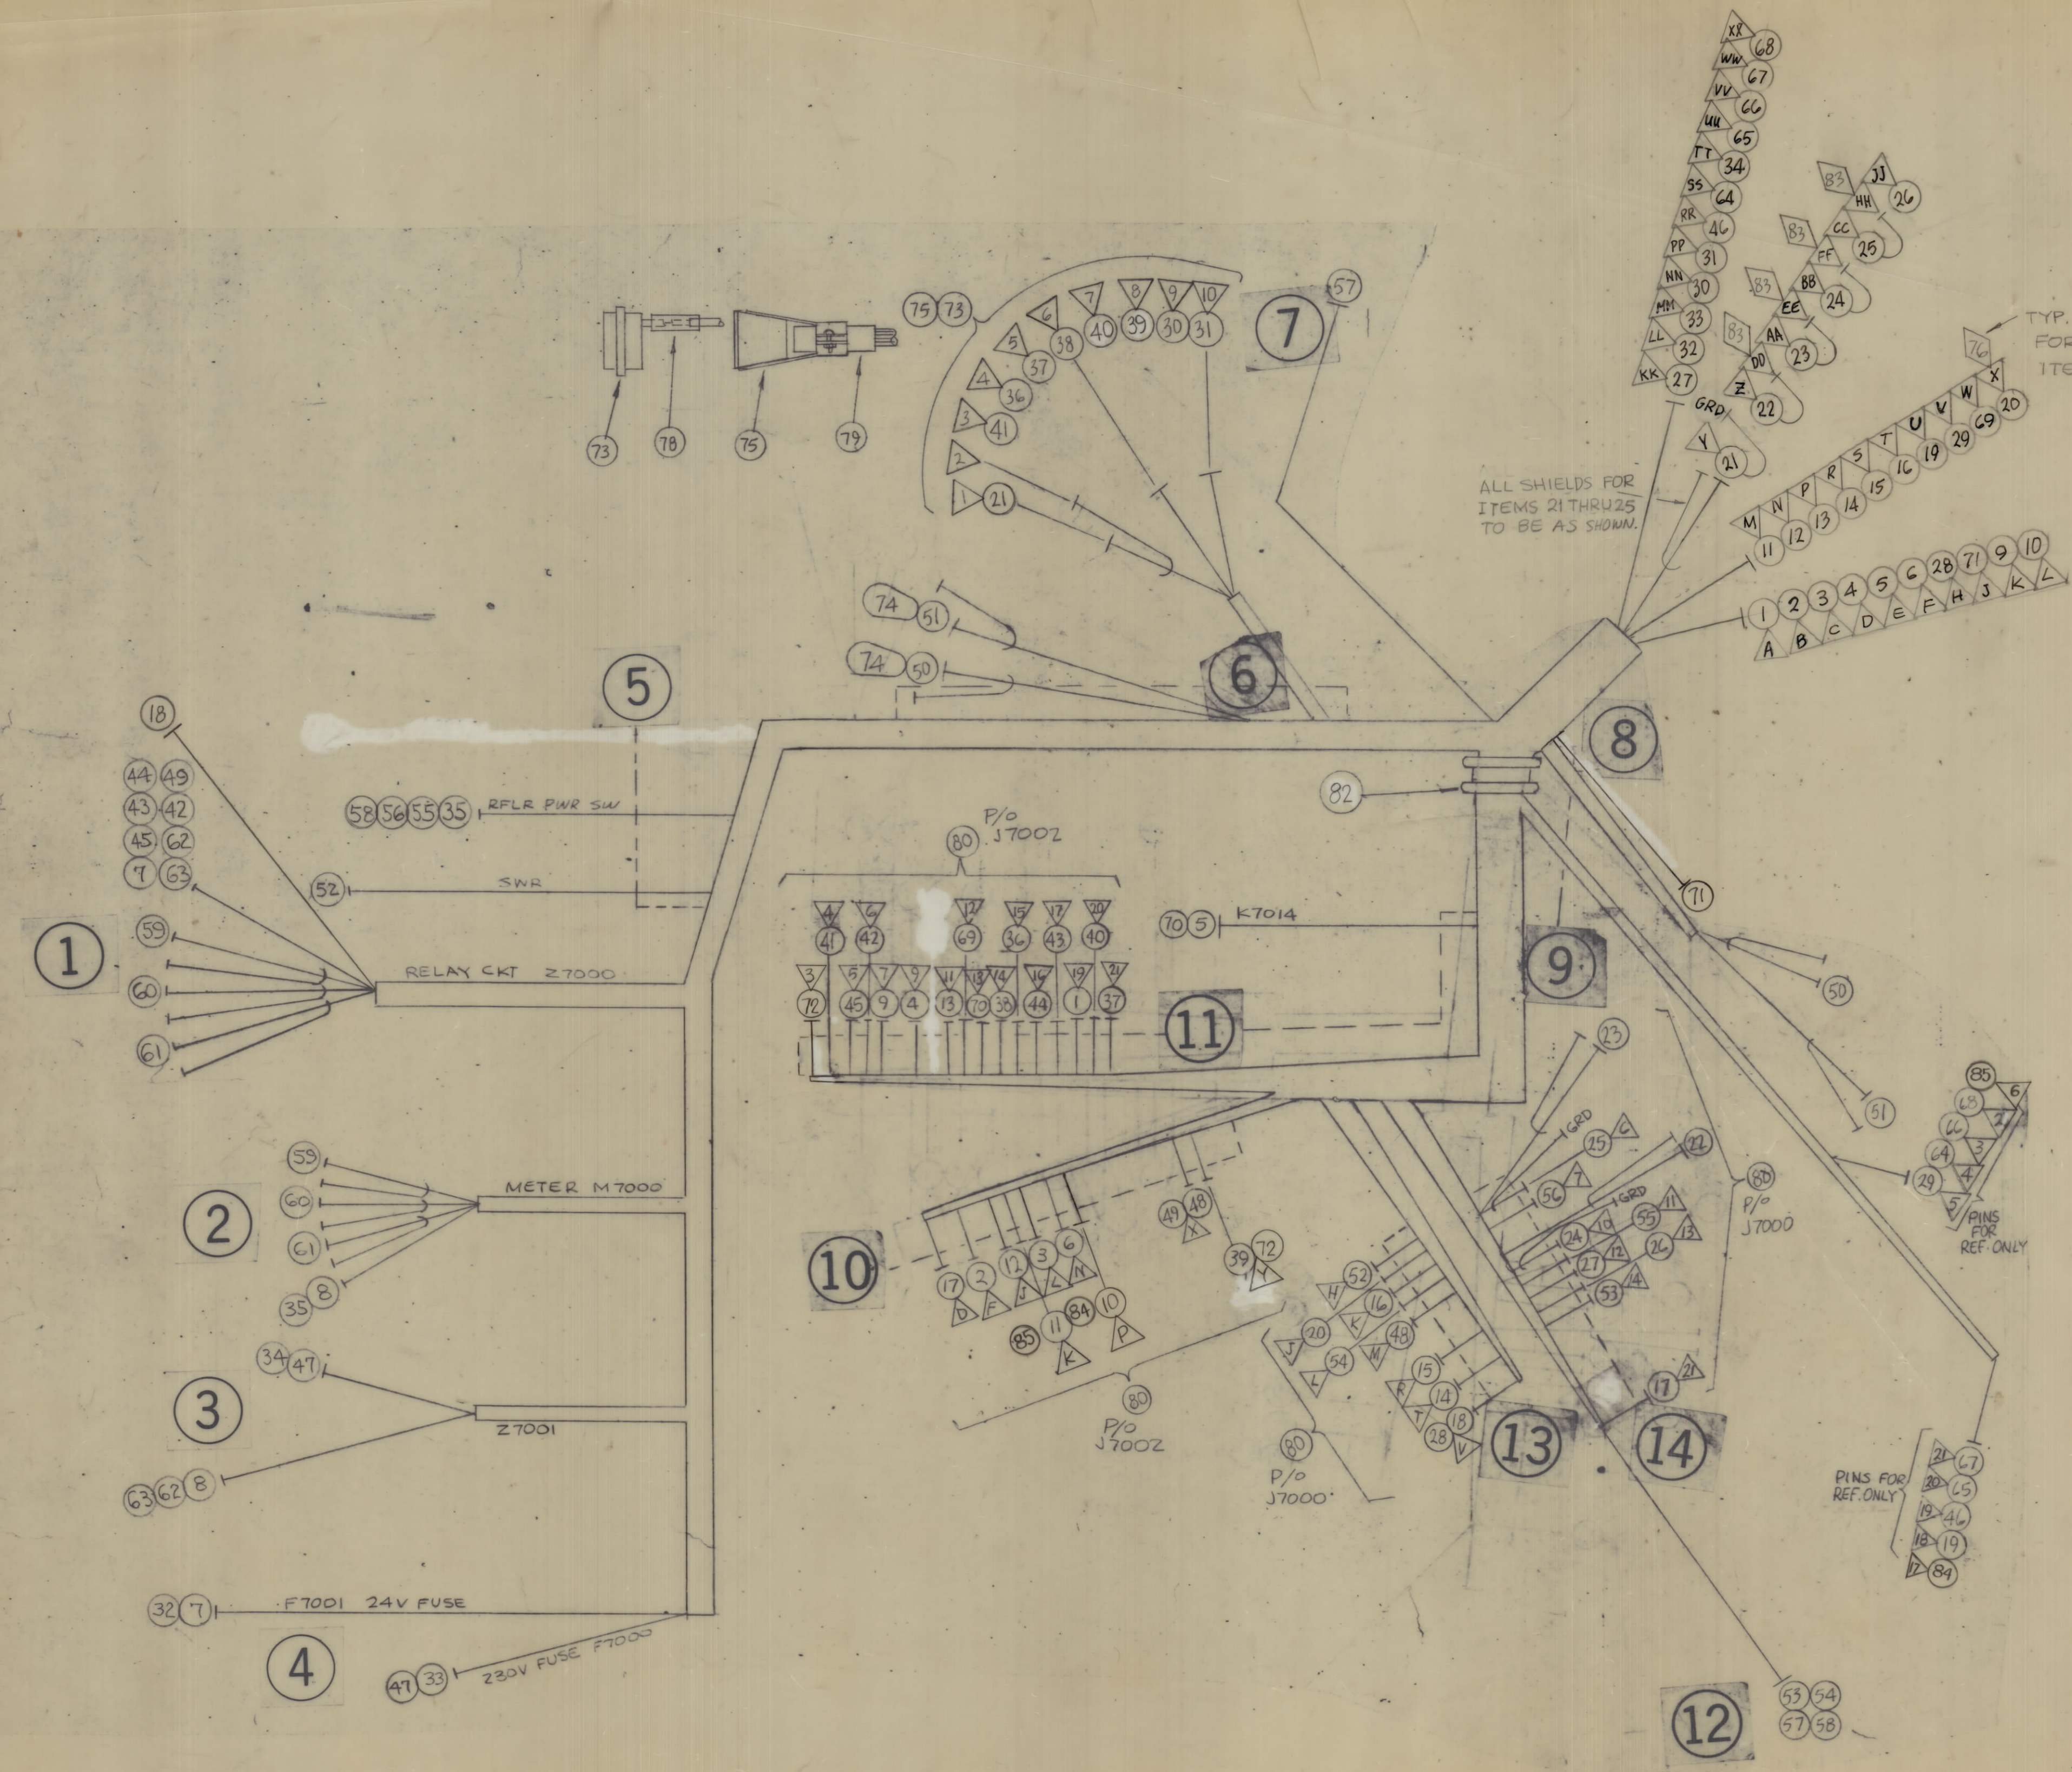

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

- SYMBOL - DENOTES
- = ITEM NO'S
 - △ = PINS
 - ◐ = CONNECTORS
 - (with lines) = BREAKOUTS
 - ◇ = CONTACTS

REQ'D	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F BUDGETT				
LIST OF MATERIAL				
MATERIAL		THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK		
FINISH		TITLE WIRING HARNESS, BRANCHED		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		DRAWN	DATE	FINAL APPROVAL
DECIMALS	FRACTIONS	CHECKED	DATE	
.x ± .05	1/16	ELECT. DES.	DATE	CA1260
.xx ± .01	ANGLES	MECH. DES.	DATE	B
.xxx ± .005	± 0° 30'			
REQ SWCA-3K		MIL 216 1/12/67		
MODEL				