



REVISIONS						
SYM	ZONE	DESCRIPTION	DATE	E.M.N.NO.	DRAFT	CHKD APPD
X		EXP. RELEASE	10-5-66	X		
Ø		ORIGINAL RELEASE FOR PRODUCTION	3.1.67			

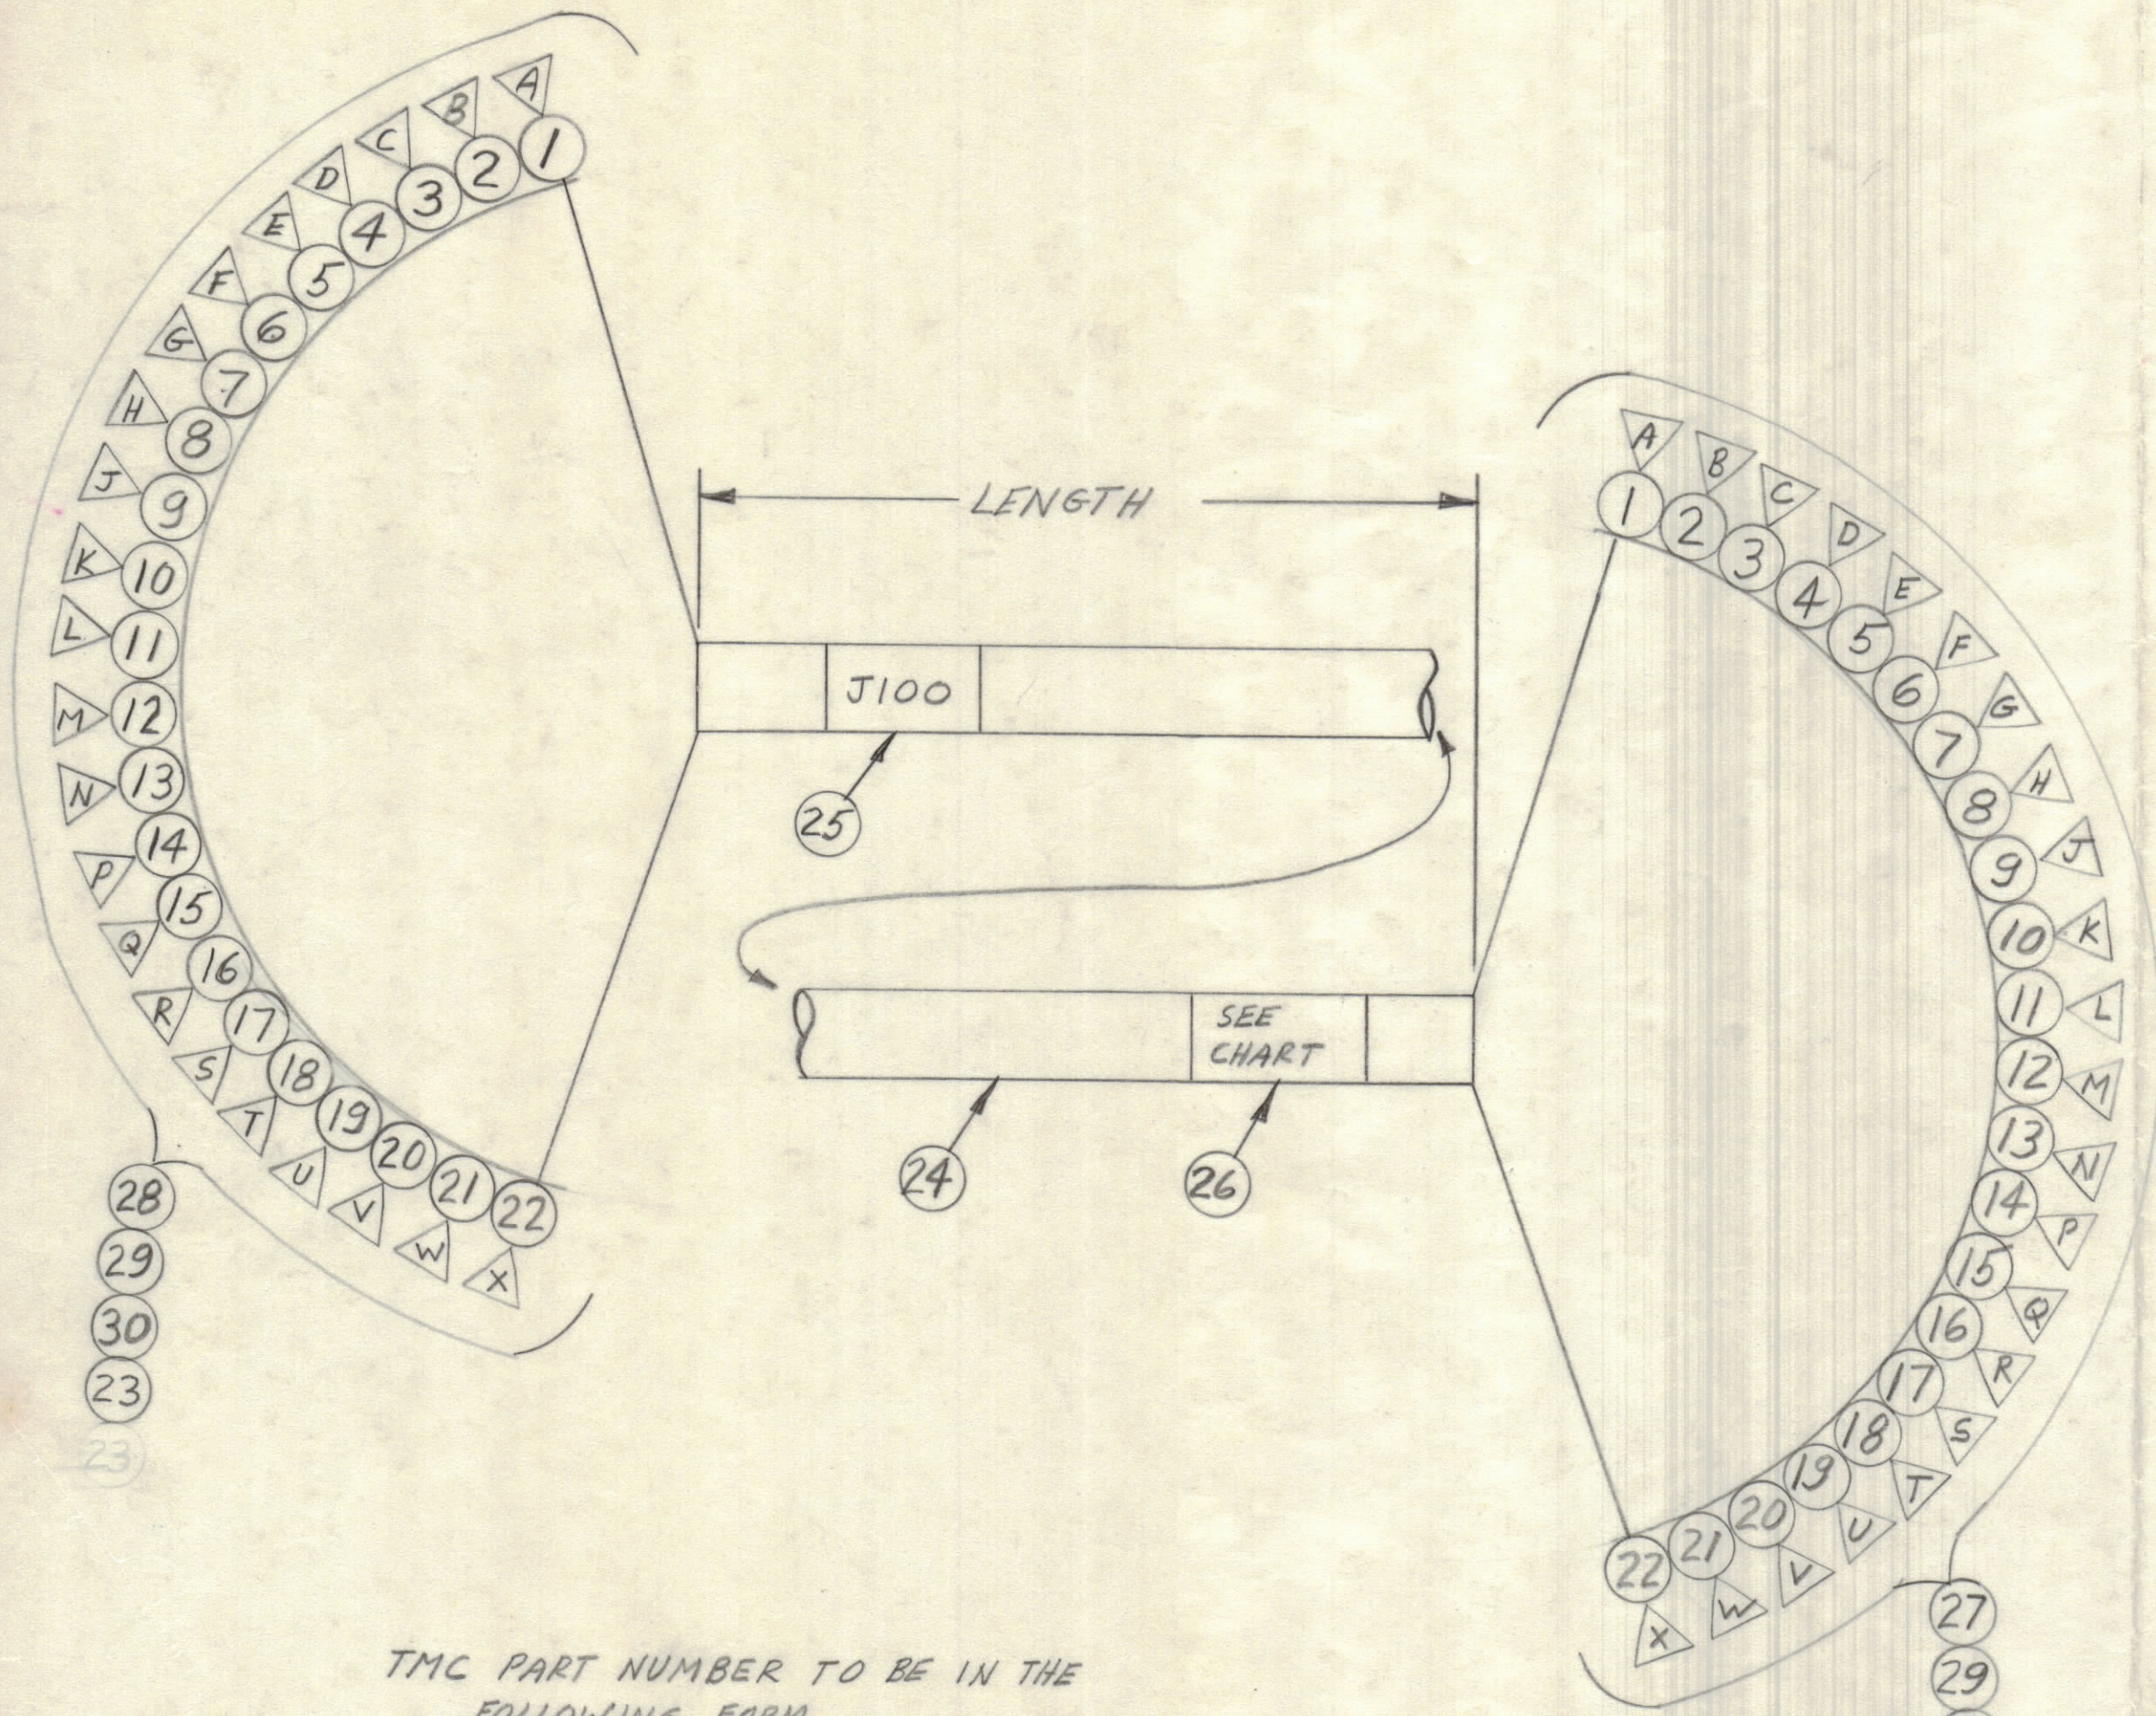

QTY	REQ	ITEM	PART NO.	FROM	DESCRIPTION	TO	SYMBOL
X	32	CD101-1MW			CD, LACING, NYLON		
X	31	BS100			SOLDER, TIN ALLOY		
2	30	MS3420-12A			BUSH, RUB		
2	29	MS3057-16			CLP, CBL, EL-CONN		
1	28	MS3106B24-28S			CONN, PL, FML	24/c	
1	27	MS3106B24-28P			CONN, PL, ML	24/c	
1	26	SEE CHART			SLV MKR, CBL		
1	25	LA107-20-J100			SLV. MKR, CBL		
	24	PX100-1-438			INS. SLVG. BLK		
	23	PX100-1-106			INS. SLVG. BLK		
	22	MWC22 (7) U902		P	-X	P	-X
	21	MWC22 (7) U901			-W		-W
	20	MWC16 (19) U0			-V		-V
	19	MWC22 (7) U900			-U		-U
	18				98	-T	-T
	17				97	-S	-S
	16				96	-R	-R
	15				95	-Q	-Q
	14				94	-P	-P
	13				93	-N	-N
	12				92	-M	-M
	11				91	-L	-L
	10				90	-K	-K
	9				9	-J	-J
	8				8	-H	-H
	7				7	-G	-G
	6				6	-F	-F
	5				5	-E	-E
	4				4	-D	-D
	3				3	-C	-C
	2				2	-B	-B
1		MWC22 (7) U1		P	-A	P	-A

TMC PART NUMBER TO BE IN THE FOLLOWING FORM

CA1284 -1-14.0
 TMC P/N | LENGTH IN FEET
 SEE CHART BELOW

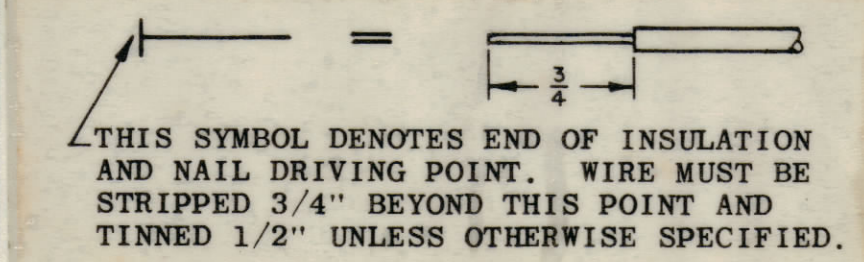

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

CABLE NO.	ITEM 26 P/N	DATE	QTY.	USED ON
CA1284 -2	LA107-20-J8006		1	RAK110-2
CA1284 -1	LA107-20-J8004		1	RAK111-2

MAXIMUM ALLOWABLE TOLERANCES HAVE BEEN DETERMINED AND ANY DEVIATIONS WILL BE CAUSE FOR REJECTION.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
 TOLERANCES ON
 FRACTIONS DECIMALS ANGLES
 $\pm 1/64$ $\pm .005$ $\pm 1/2^\circ$

MATERIAL
 FINISH
 CONTRACT NO.

BILL OF MATERIAL							
QTY REQ	ITEM	PART NO.	FROM	DESCRIPTION	TO	SYMBOL	
F. BUDETTI							
FINAL APPROVAL		DATE		THE TECHNICAL MATERIEL CORP.			
MECH. DES.		DATE		MAMARONECK, NEW YORK			
ELECT. DES.		DATE		CABLE, SPECIAL PURPOSE			
CHECKED		DATE					
DRAWN		DATE					
APPROVED FOR		DATE		CODE	SIZE	DWG. NO.	ISSUE
				82679	C	CA1284	Ø
SCALE		SHEET		OF			