


REVISIONS						
SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXP. RELEASE	10-4-66	X		M	M
Ø	ORIGINAL RELEASE FOR PRODUCTION	12/30/66	Ø	RME		

CA1287

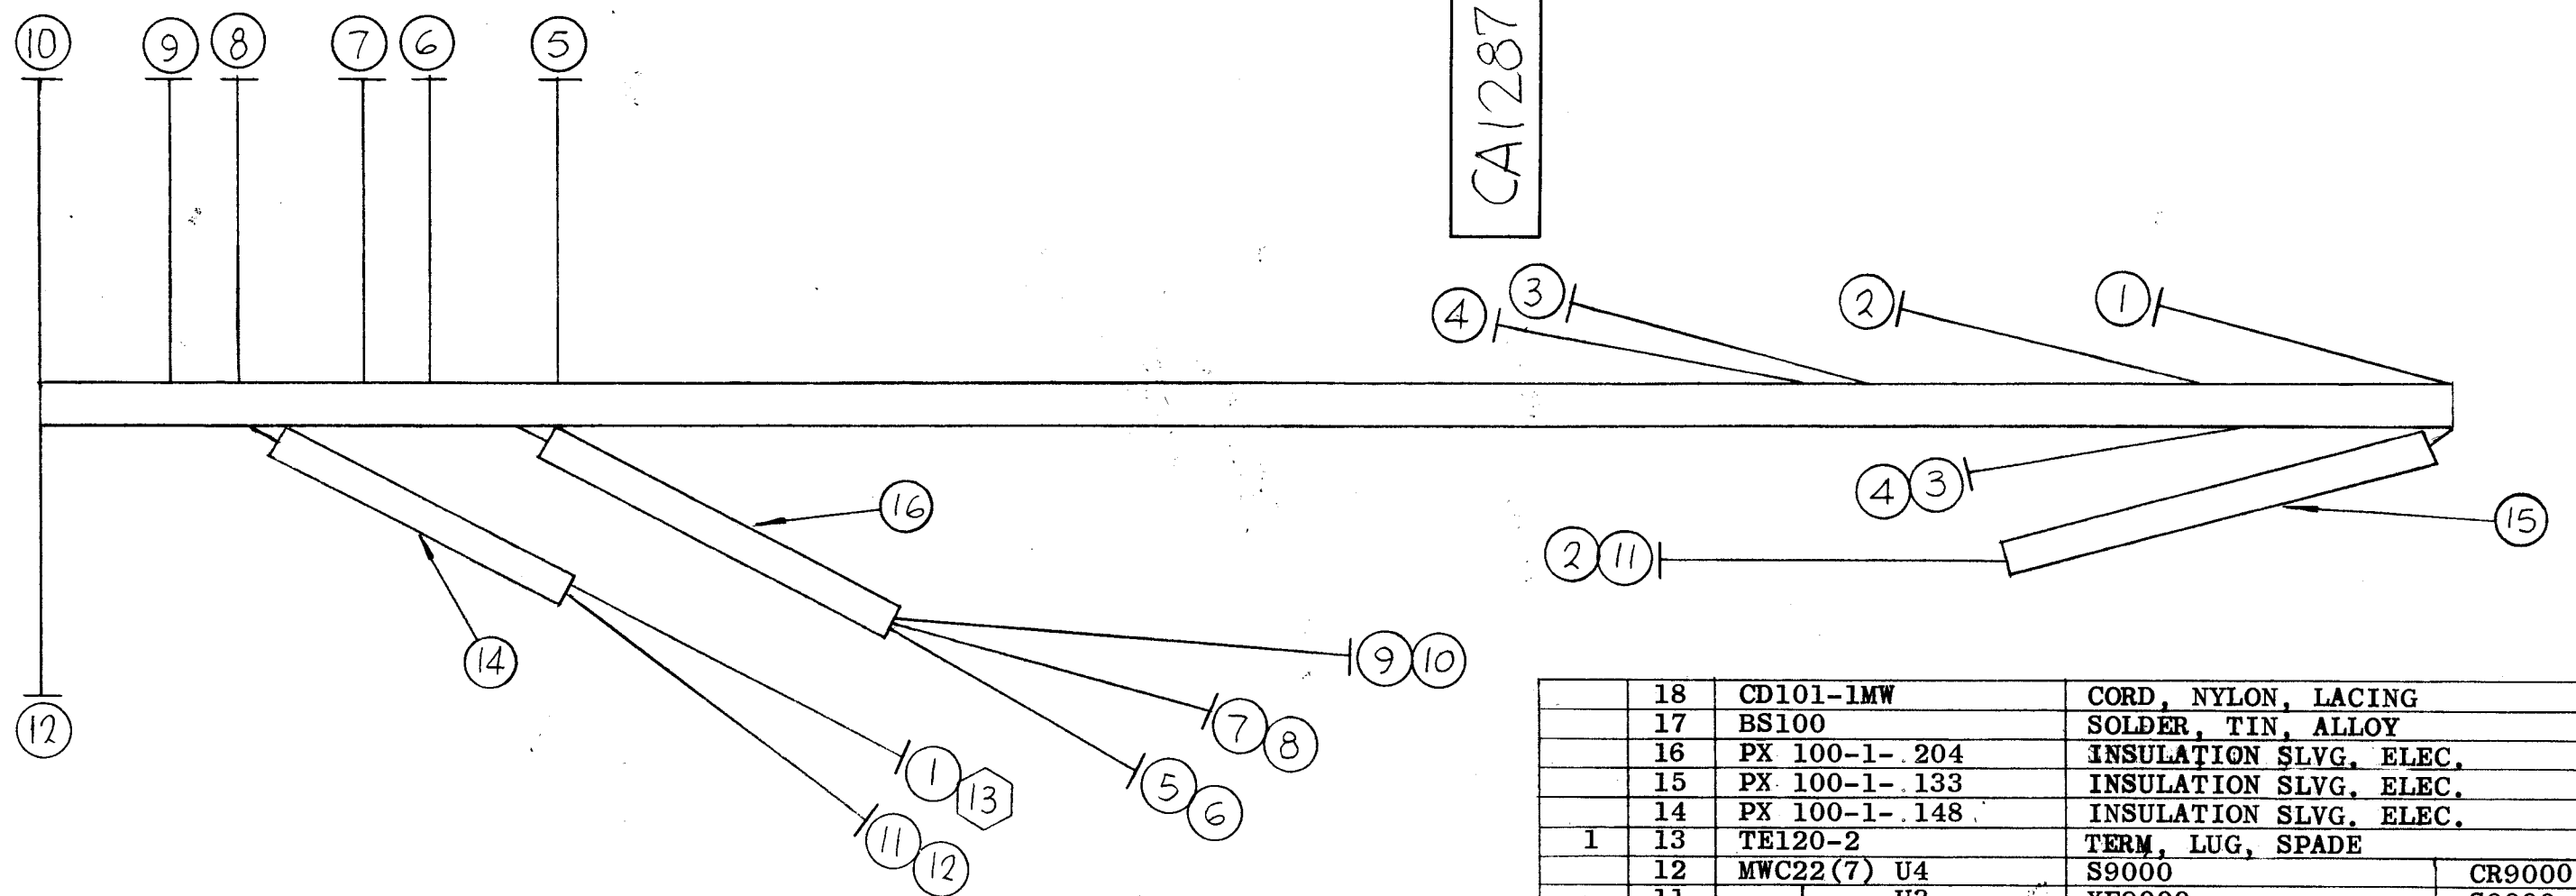

	18	CD101-1MW	CORD, NYLON, LACING			
	17	BS100	SOLDER, TIN, ALLOY			
	16	PX 100-1-.204	INSULATION SLVG. ELEC.			
	15	PX 100-1-.133	INSULATION SLVG. ELEC.			
	14	PX 100-1-.148	INSULATION SLVG. ELEC.			
1	13	TE120-2	TERM, LUG, SPADE			
	12	MWC22(7) U4	S9000			CR9000
	11	U3	XF9000			S9000
	10	U96	E9001	TERM 9		S9001 POS 6
	9	U95			7	5
	8	U94			6	4
	7	U93			4	3
	6	U92			3	2
	5	U91	E9001	TERM 1		S9001 POS 1
	4	U6	E9000	TERM 14		J9000
	3	U5			12	J9000
	2	U2			7	XF9000
	1	MWC22(7)U90	E9000	TERM 3		DS9001


THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

SYMBOL - DENOTES
 ○ = ITEM NO'S
 ⬡ = LUGS

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

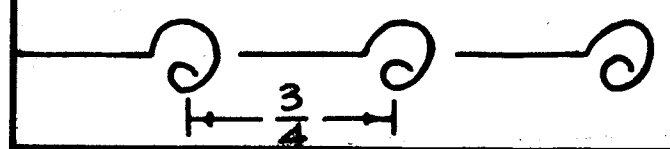

NOTES

1	AX-633	A5550
QTY./UNIT	MODEL USED ON	ASS'Y. NO.
SCALE	CODE	
1:1	A	

THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
F. BUDETTI				
MATERIAL			THE TECHNICAL MATERIEL CORP.	
			MAMARONECK, NEW YORK	
FINISH			TITLE	
			CABLE, MAIN	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN	DATE
			CHECKED	DATE
			ELECT. DES.	DATE
			MECH. DES.	DATE
			FINAL APPROVAL	DATE
			CA1287	Ø
			SHEET	REV. LTR.

DECIMALS
 .X ± .05
 .XX ± .01
 .XXX ± .005

FRACTIONS
 ± 1/64
 ANGLES
 ± 0° 30'

TOLERANCES