



REQ. PER UNIT		USED ON	
1	MODEL	ASSY. NO.	DATE
1	PS-4A		11-22-66
	KIT-320		11-22-66

CA1297

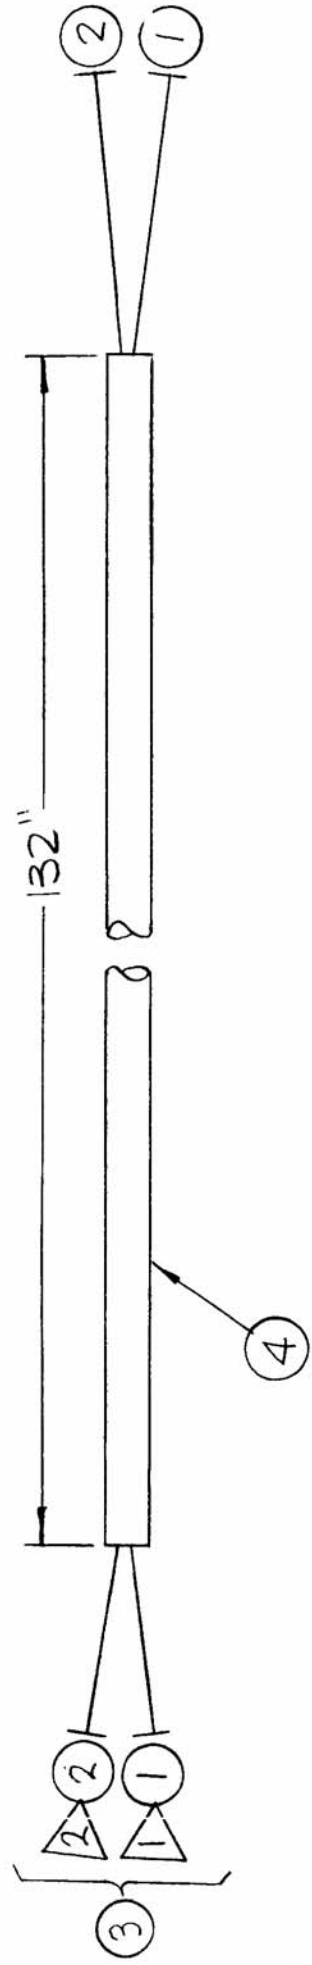

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ. ITEM	PART NO.	DESCRIPTION	SYMBOL
X 5	BS100	SOLDER, TIN ALLOY	
X 4	PX100-1-166	INS. SLVG. ELEC.	
1 3	PL105-1	CONN. ELEC.	
2	MWC22(7)U2	WIRE, ELECT, INS.	
1	MWC22(7)U3	WIRE, ELECT, INS.	

F. BUDETTI		DESCRIPTION	SYMBOL
		THE TECHNICAL MATERIEL CORP.	
		MAMARONECK. NEW YORK	
		CABLE, INTER-CONNECT	
DRAWN		CHECKED	FINAL APPROVAL
ELEC. DES. APP.		MECH. DES. APP.	CA1297

DATE	3/23/67	CH. NO.	1:1
DESCRIPTION	EXP. RELEASE	DATE	11-22-66
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES		SCALE	1:1
TOLERANCES		CODE	A
FRACTIONS			
DECIMALS			
.X ± .05			
.XX ± .01			
.XXX ± .005			