



REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	X	EXPERIMENTAL RELEASE	5.22.67	44	440	RG
	Ø	ORIG RELEASE FOR PRODUCTION	5.25.67	Ø	RG	RG

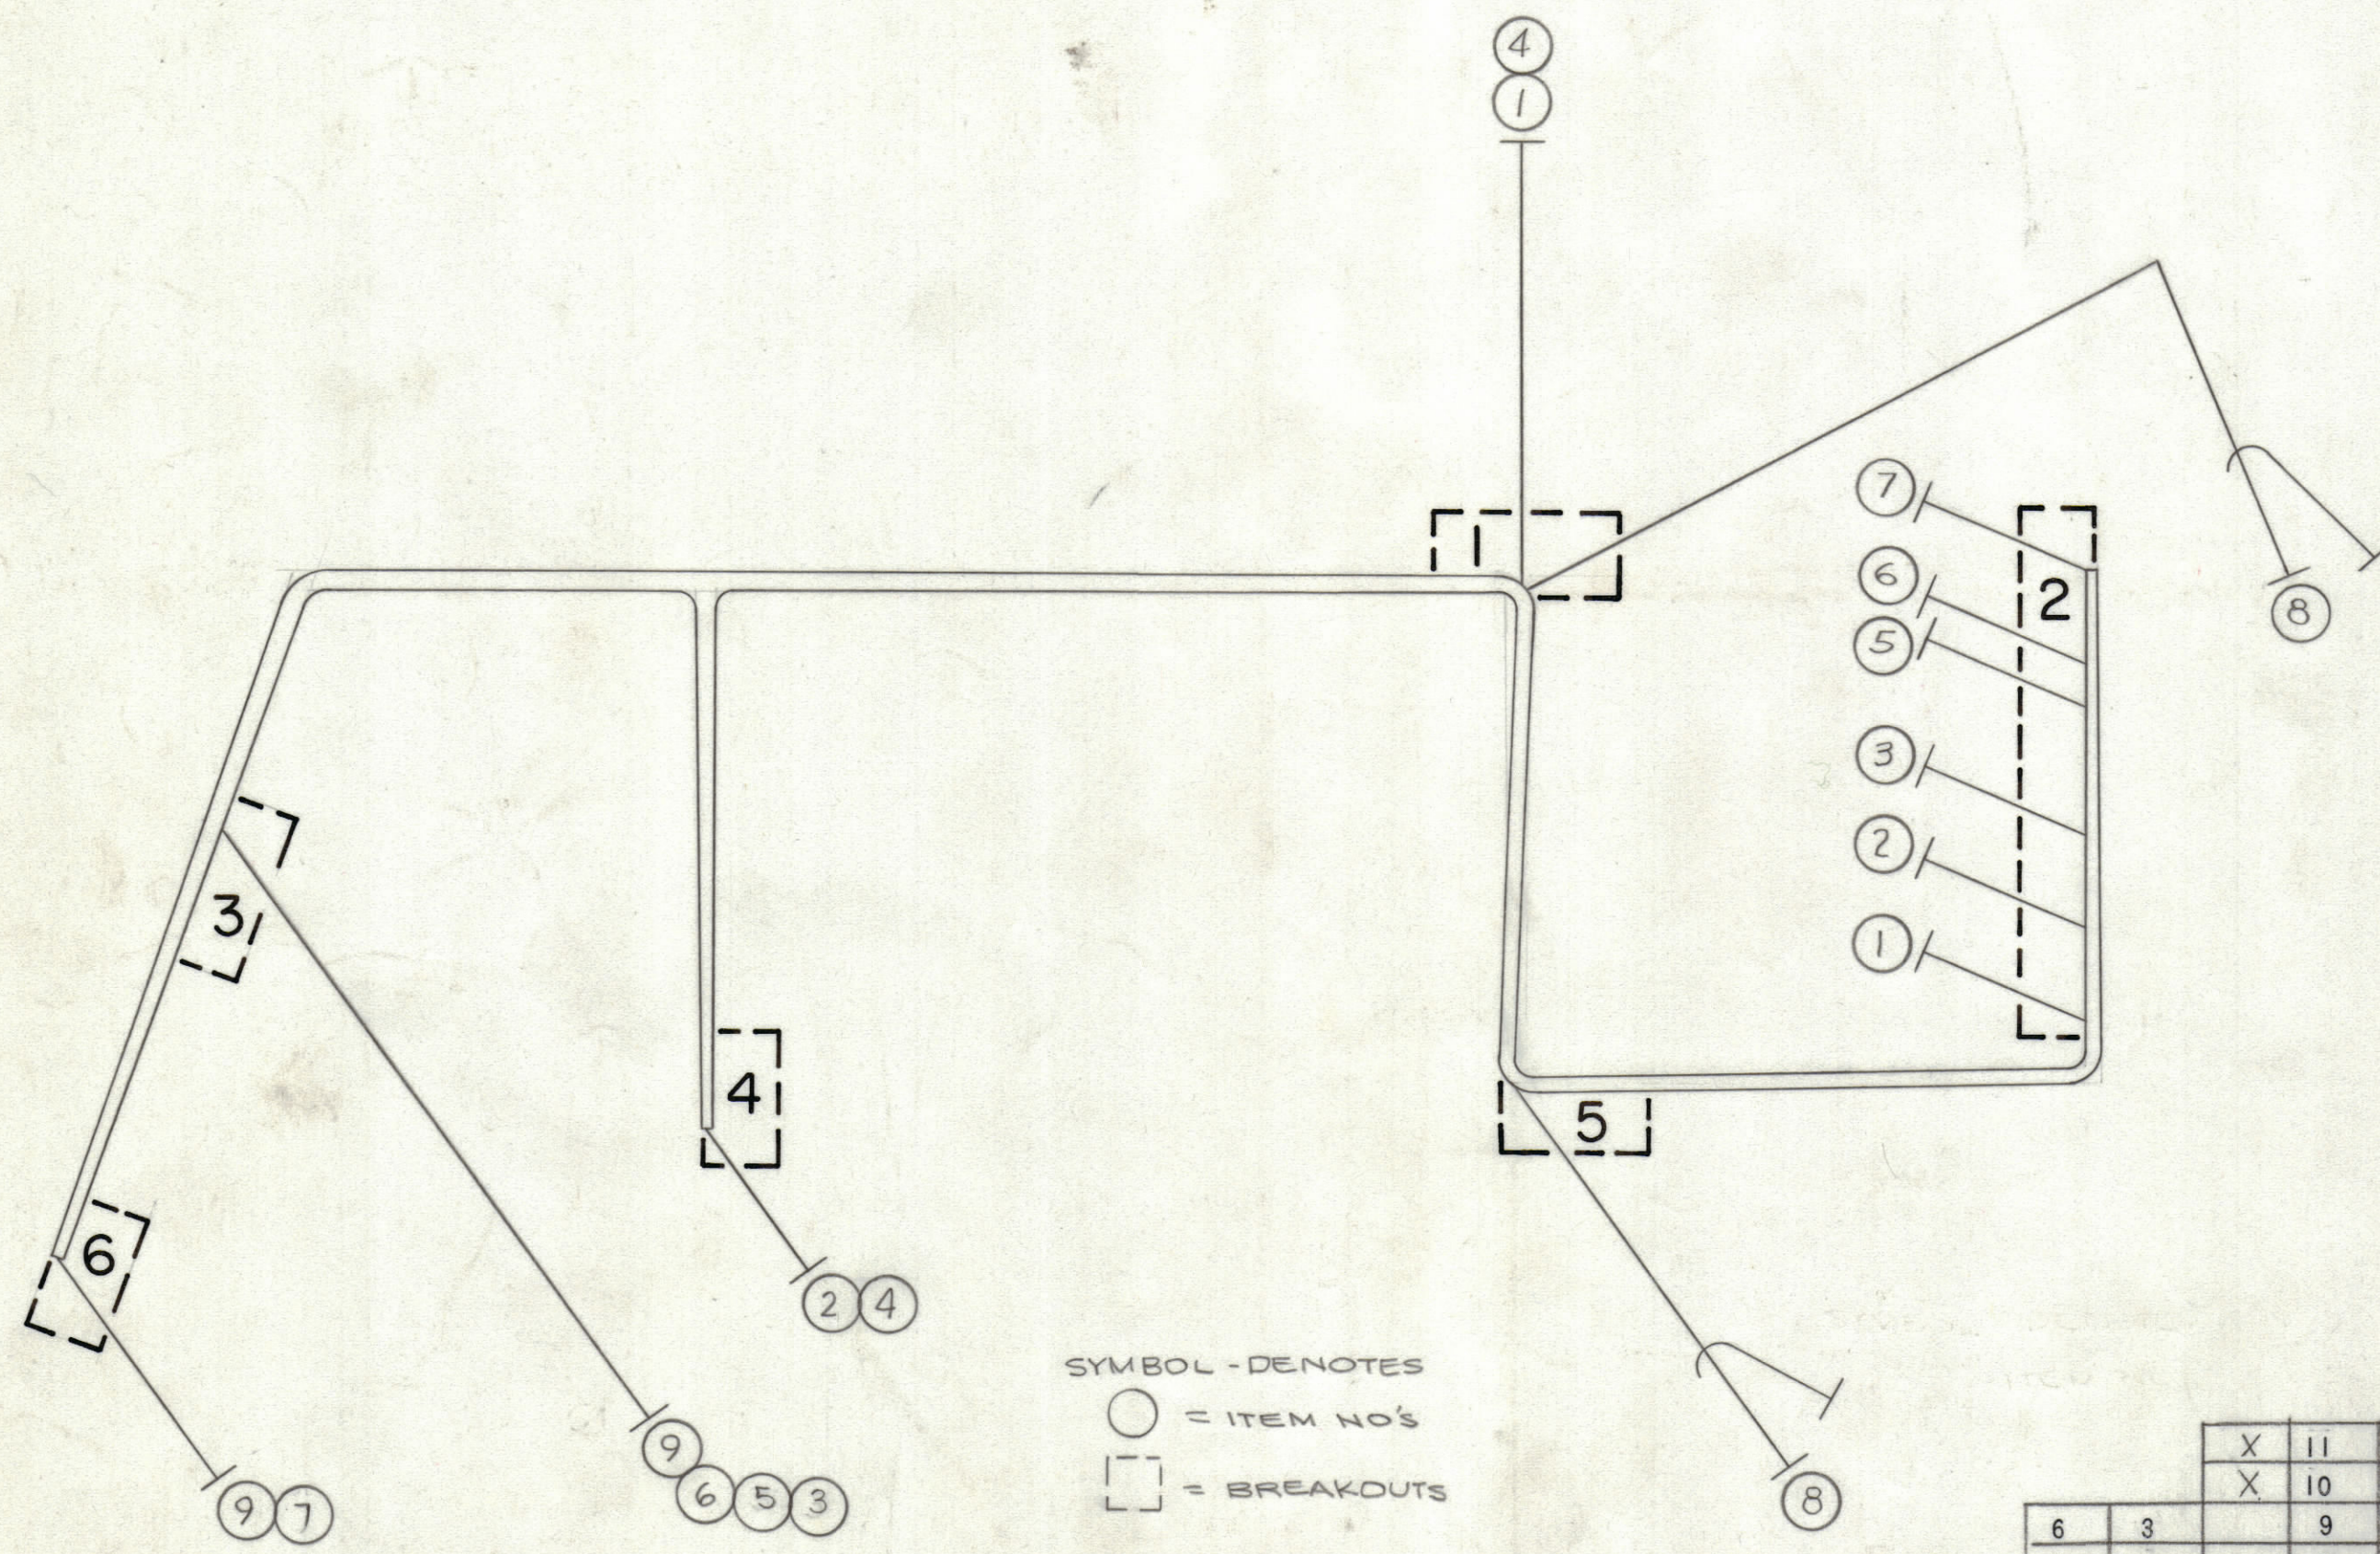

SYMBOL - DENOTES
 ○ = ITEM NO'S
 [] = BREAKOUTS

FROM	TO	QTY. REQ.	ITEM	PART NO.	FROM	DESCRIPTION	TO	SYMBOL
		X	11	BS100		SOLDER, TIN ALLOY		
		X	10	CD101-1MW		CORD, NYLON, LACING		
6	3		9	MWC24(7)U6		R1554		Q903 COLLECTOR
5	1		8	RG174*/U		OUTPUT		J1516
6	2		7	MWC24(7)U7		A4542-7		Q903 BASE
3	2		6	U6		A4542-6		R1554
3	2		5	U5		A4542-5		R1554
4	1		4	U4		F912		T903
3	2		3	U3		A4542-3		C1559
4	2		2	U2		A4542-2		T903
2	1		1	MWC24(7)U1		A4542-1		F912

UNLESS OTHERWISE SPECIFIED WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.
 1. ALL R.F. CABLES
 2. ALL SHIELDED CABLES
 3. ALL OTHERS
 SPACE LACING APPROXIMATELY 3/4" APART.

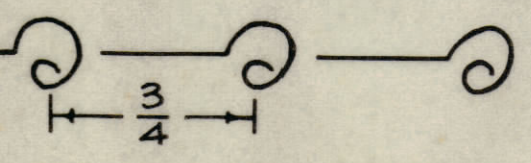

QTY / UNIT	MODEL USED ON	ASS'Y NO.
1 PER UNIT	SMEA-1 / SMEC-1	
	SMEB-1 / SMEE-1	
APPLICATION		
S401-451	CODE A	

NOTICE TO PERSONS RECEIVING THIS DRAWING
 THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed herein. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown herein without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.

THE ABOVE SYMBOL DENOTES END OF SHIELD, WHICH SHOULD BE TERMINATED AS SHOWN, LEAVING EXCESS SHIELDING AS A PIGTAIL. TIN PIGTAIL 1/4 INCH.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

0. POSE
 FINAL APPROVAL: [Signature] DATE: 5/25/67
 MECH. DES. DATE:
 ELECT. DES. DATE:
 CHECKED: [Signature] DATE: 5-24-67
 DRAWN: 440 DATE: 5.22.67

LIST OF MATERIAL
THE TECHNICAL MATERIEL CORP.
 MAMARONECK, NEW YORK
WIRING HARNESS, BRANCHED
 SIZE CODE IDENT.NO. DWG NO. ISSUE
 C 82679 CA1317 Ø
 SCALE 1:1 SHEET OF