



REVISIONS						
ZONE	LTR	DESCRIPTION	DATE	E.M.N.NO	DRAFT	CHKD APPD
	X	EXPERIMENTAL RELEASE	1-18-67	X	RME	
	Ø	ORIGINAL RELEASE FOR PRODUCTION	2-3-67	Ø	RME	
	A	PIN "C" WAS "B"	4-25-67	18142	HLD	<i>[Signature]</i> EB

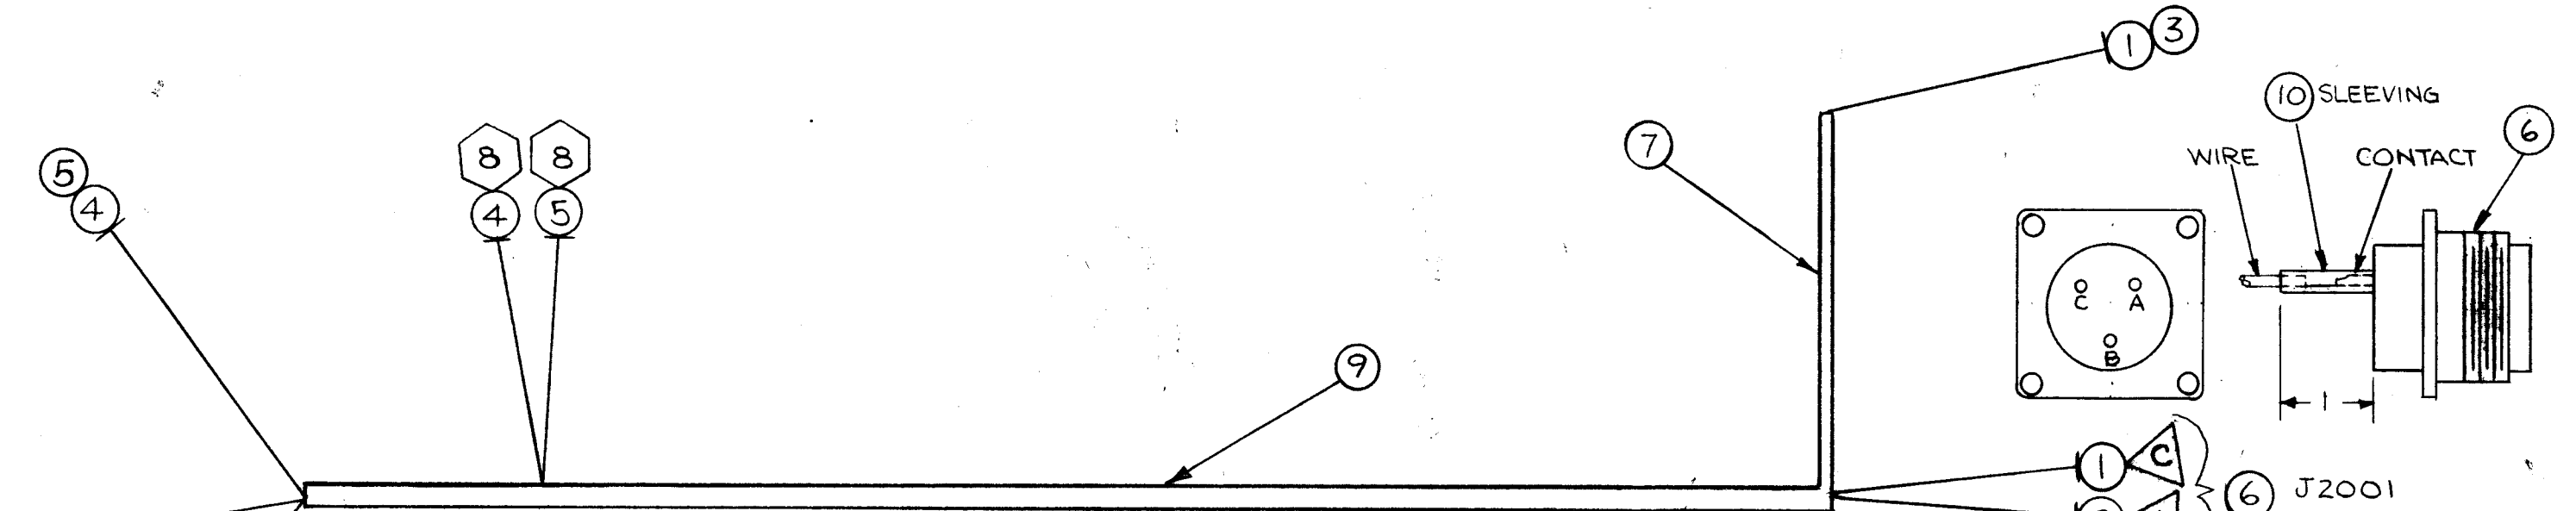

UNLESS OTHERWISE SPECIFIED
 WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
 AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

- ALL R.F. CABLES
- ALL SHIELDED CABLES
- ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.

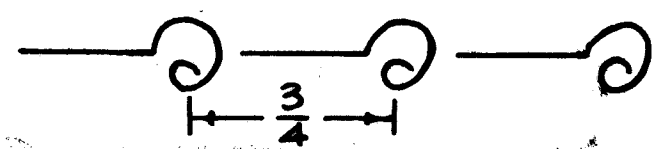

SYMBOL DENOTES

○ = ITEM NO.

⬡ = TERMINAL LUG ITEM NO.

△ = PIN NO.

THIS SYMBOL DENOTES END OF INSULATION AND NAIL DRIVING POINT. WIRE MUST BE STRIPPED 3/4" BEYOND THIS POINT AND TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

REQ'D	ITEM	PART NUMBER	FROM DESCRIPTION	TO	SYM.
	11	BS100	SOLDER, TIN ALLOY		
	10	PX100-1-11B	INSULATION, SLEEVING		
	9	PX100-1-20B	INSULATION, SLEEVING		
2	8	TE120-2	TERMINAL, LUG, SPADE		
	7	CD101-1KAW	CORD, NYLON, LACING		
	6	MS3102A14S-1P	CONNECTOR, RECEPTACLE		
	5	MWC24(7)U2	T2001-PIN 7	TB2001-PIN 2	
	4	U4	T2001-PIN 6	TB2001-PIN 1	
	3	U3	XF2001	T2001-PIN 1	
	2	U8	J2001-PIN A	T2001-PIN 4	
	1	MWC24(7)U3	J2001-PIN C	XF2001-END LUG	

BUTLER LIST OF MATERIAL

FINAL *[Signature]* **EB** DATE 1-18-67

MECH. DES. *[Signature]* DATE

ELECT. DES. *[Signature]* DATE 2-1-67

CHECKED *[Signature]* DATE

DRAWN RME DATE 1-18-67

THE TECHNICAL MATERIEL CORP.
 MAMARONECK, NEW YORK

WIRING HARNESS, BRANCHED

SIZE	CODE IDENT. NO.	DWG NO.	ISSUE
B	82679	CA1319	A

SCALE SHEET OF

1	SBT350WAX-1	AX650
QTY / UNIT	MODEL USED ON	ASS'Y NO.
APPLICATION		
CODE		
NOTICE TO PERSONS RECEIVING THIS DRAWING THE TECHNICAL MATERIEL CORPORATION claims proprietary right in the material disclosed hereon. This drawing is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown hereon without permission from THE TECHNICAL MATERIEL CORPORATION to the user. This drawing is loaned for mutual assistance and is subject to recall at any time.		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES

DECIMALS .X ± .05 FRACTIONS 1/64
 .XX ± .01 TOLS. ANGLES
 .XXX ± .005 0°-30'

MATERIAL FINISH