


SYM	DESCRIPTION	DATE	E.M.N. NO.	DRAFT	CHKD	APPD
X	EXPERIMENTAL RELEASE	4.4.67		LHW	CB	
Ø	ORIGINAL RELEASE FOR PRODUCTION	4.12.67		RG		


CA1232

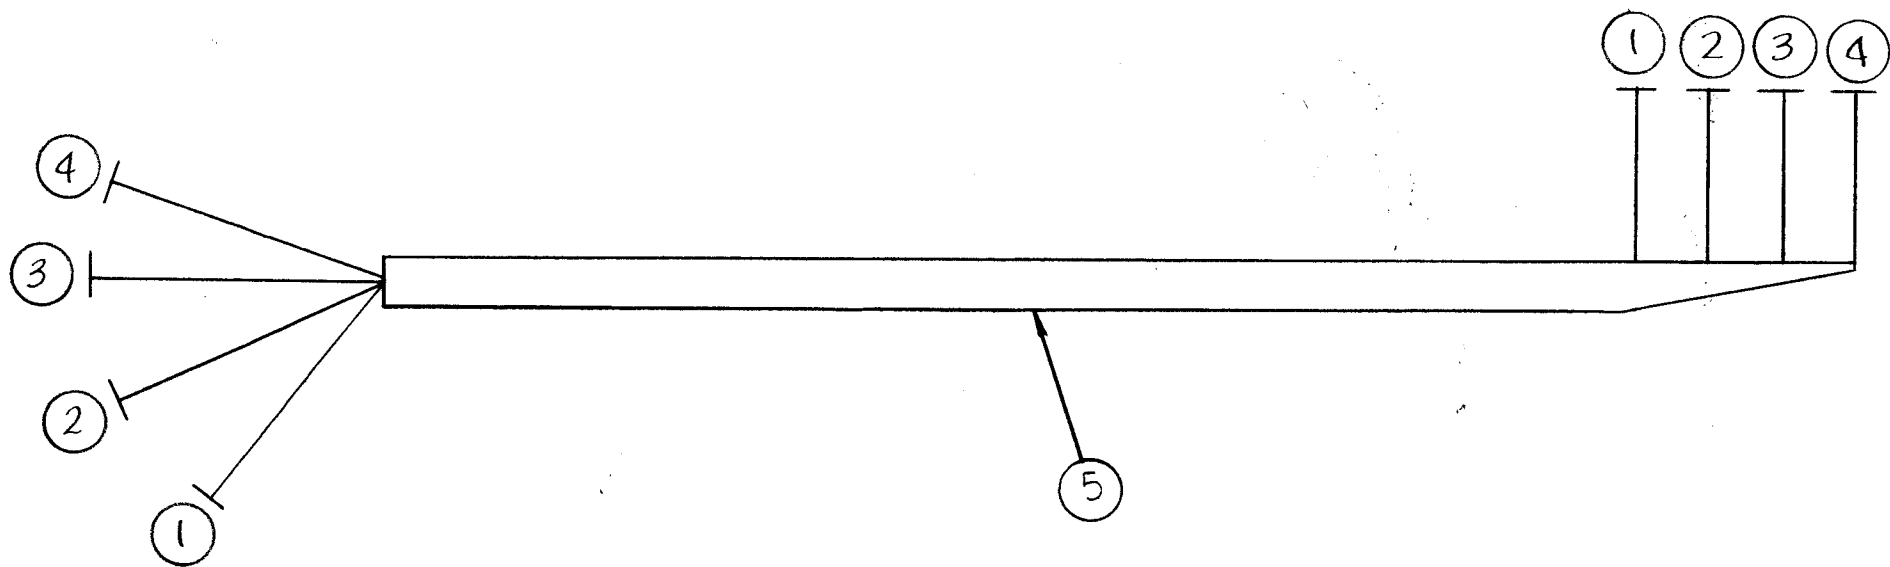

UNLESS OTHERWISE SPECIFIED
WIRES SHOULD BE PLACED IN CABLE IN NUMERICAL SEQUENCE
AS THEY APPEAR IN ITEM COLUMN BY CATEGORY.

1. ALL R.F. CABLES
2. ALL SHIELDED CABLES
3. ALL OTHERS

SPACE LACING APPROXIMATELY 3/4" APART.



THIS SYMBOL DENOTES END OF INSULATION
AND NAIL DRIVING POINT. WIRE MUST BE
STRIPPED 3/4" BEYOND THIS POINT AND
TINNED 1/2" UNLESS OTHERWISE SPECIFIED.

NOTES

7	BS100	SOLDER, TIN ALLOY		
6	CD101-1-MW	CORD, LACING		
5	PX100-1-234	INSULATION, SLEEVING		BLACK
4	MWC24(7)U7	S1515 PIN 5	TB1502 TERM 2	VIOLET
3	0	4	3	BLACK
2	3	3	4	ORANGE
1	MWC24(7)U1	S1515 PIN 2	TB1502 TERM 3	BROWN

REQ'D.	ITEM	PART NUMBER	DESCRIPTION	SYMBOL
R. HAY LIST OF MATERIAL				
MATERIAL			THE TECHNICAL MATERIEL CORP. MAMARONECK, NEW YORK	
FINISH			TITLE CABLE ASS'Y	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND INCLUDE CHEMICALLY APPLIED OR PLATED FINISHES			DRAWN LHW	DATE 4.4.67
DECIMALS .X ± .05 .XX ± .01 .XXX ± .005			CHECKED CB	DATE
FRACTIONS ± 1/64 ANGLES ± 0° 30'			ELECT. DES.	DATE
TOLERANCES			MECH. DES.	DATE
THE CONTENTS OF THIS DRAWING ARE THE EXCLUSIVE PROPERTY OF THE TECHNICAL MATERIEL CORP. ITS UNAUTHORIZED USE OR REPRODUCTION IN WHOLE OR IN PART IS STRICTLY FORBIDDEN.			FINAL APPROVAL M. HAY 4/11/67	
SCALE 1:1			SHEET CA1332	
Q'TY./UNIT			REV. LTR. Ø	
MODEL USED ON TTR-12			DATE	
ASS'Y. NO. KIT 278			DATE	